



- The flooring shall be OHMega EC, as supplied by Polyflor Ltd. of Manchester, England.
- The flooring shall be flexible PVC sheet flooring with electrostatic conductive properties in 2.0mm thickness.
- It shall be homogeneous and monolayer in construction with a conductive varnish.
- The electrostatic conductive properties must be present throughout the full product thickness.



- The flooring shall conform fully with the requirements of EN 649 / EN 10581 and ASTM F1913.
- In respect of flamespread, the flooring shall have been fully tested to EN 13501-1 and certified as having Class Bfl-S1, achieving the criteria EN ISO 9239-1 $\geq 8\text{kw/m}^2$ and the mandatory requirement of EN ISO 11925-2 pass. It shall be tested to ASTM E648 and certified as having passed with a Class 1 rating, making it suitable for use in institutional, commercial and public buildings.
- With regard to EN 13893 for slip resistance, the flooring shall be classified DS. It shall also be classified R9 for DIN 51130 making it suitable for use in areas which are predominantly dry, but with occasional spillage.
- The product must have been fully tested for abrasion resistance to the Frick Taber test EN 660: Part 2 and be in abrasion group P, as defined in EN 649.
- With regard to electrostatic conductive properties, the flooring must conform to the requirements of HTM2. When tested to EN 1081 R₁/R₂ the flooring must have a resistance of between 10^4 to 1×10^6 ohms. When tested to ESD S7.1, the flooring must have a resistance of between 2.5×10^4 to 1×10^6 ohms. Tested to BS EN/IEC 61340-4-1 R₆, the flooring must have a resistance of $\leq 1 \times 10^4 - 1 \times 10^6$. When tested to BS EN/IEC 61340-4-5 the flooring must have a resistance of $< 20\text{V}$.
- In accordance with EN 649, the in-use classification must be at least 34/43 as defined in EN 685: i.e. commercial areas with very heavy use; and light industrial areas with heavy use.
- The flooring must be available in 2.0 metre width, to minimise the number of joints.
- In respect of light fastness, the flooring shall have been fully tested to ISO 105-B02 Method 3 as having a pass to ≥ 6 .



- The flooring will achieve a BRE Global Environmental Generic A+ rating in major use areas such as education and health.
- The manufacturer should provide a facility to take back and recycle waste vinyl flooring material through the Recofloor scheme.



- The manufacturer of the floorcovering must be in possession of a valid quality systems certificate, showing compliance with BS EN ISO 9001.
- The manufacturer should provide a facility to take back and recycle waste vinyl flooring material through the Recofloor scheme.
- The flooring shall be tested to and pass key independent, international standards for low VOC emissions.



- A moisture test must be carried out, to ensure that the subfloor has dried out to a level consistent with the application of vinyl flooring. The test should be carried out using a hygrometer, in accordance with the instructions in BS 8203. The result should not exceed 75%RH, once equilibrium has been achieved.
- The adhesive used must be approved by Polyflor, to ensure full product compatibility.
- Products must be fully conditioned to the environment in which they are to be installed, as outlined by Polyflor.
- Installation must be carried out in accordance with BS 8203 and the instructions of Polyflor, to ensure product performance and achievement of electrical results outlined above.
- All joints must be welded.



- Polyflor Electrostatic Conductive products are recommended for use in electronics manufacturing (wafer fabrication; product assembly; inspection and storage); laboratories and cleanrooms, also healthcare facilities, including operating theatres; anaesthetising areas; intensive-care units and radiology departments.



- At the date of issue the data presented is correct. However, Polyflor Ltd. reserves the right to make changes which do not adversely affect performance or quality.
- Polyflor ESD flooring ranges are compatible for use with the most commonly used alco-based hand gels and are suitable for steam cleaning on a periodic basis. For clarification and for information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com.



Recofloor™
Vinyl Take-Back Scheme




POLYFLOR

OHMega EC

PRODUCT SPECIFICATION



Refer to BRE Global ratings on www.thegreenguide.org.uk

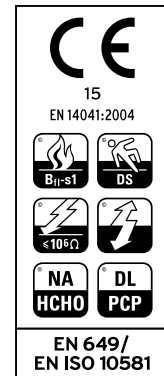

Access Panel applications require specific fitting instructions, to ensure product performance and achievement of electrical results outlined. Contact Polyflor Customer Technical Services on +44 (0)161 767 1912 for information.

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK
UK SALES DIRECT: +44 (0)161 767 1122 UK SAMPLE REQUESTS: +44 (0)161 767 2551
EXPORT SALES DIRECT: +44 (0)161 767 1913 TECHNICAL SUPPORT: +44 (0)161 767 1912
RECEPTION: +44 (0)161 767 1111 UK FAX: +44 (0)161 767 1128
EXPORT FAX: +44 (0)161 767 1166 E-MAIL: INFO@POLYFLOR.COM
WEBSITE: WWW.POLYFLOR.COM

James Halstead™
FLOORING



2011

January 2015

POLYFLOR™
COVERING THE WORLD