

POLYFLEX PLUS

- Homogeneous general purpose vinyl floor tile
- Available in traditional and duotone marbling

SPECIFICATION



1.5mm
2.0mm
2.5mm




1.5mm: 300 x 300mm = 4.5m²
2.0mm: 300 x 300mm = 4.5m²
2.5mm: 300 x 300mm = 3.6m²



1.5mm: 2800g/m²
2.0mm: 3800g/m²
2.5mm: 4860g/m²



GENERAL PERFORMANCE
EN 649/EN ISO 10581

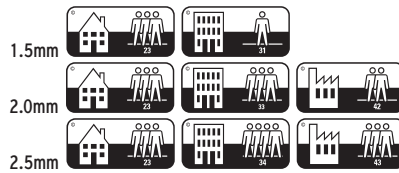

REACTION TO FIRE
EN 13501-1 Class Bfl-S1
ASTM E648 Class 1



SLIP RESISTANCE
EN 13893 Class DS



VOC EMISSIONS
AgBB VOC test: Pass



DIMENSIONAL STABILITY
EN 434/EN ISO 23999



FLEXIBILITY
EN 435/EN ISO 24344 (Method A) 40mm mandrel



INDENTATION - RESIDUAL
EN 433/EN ISO 24343 pt 1



ENVIRONMENTALLY PREFERABLE FLOORING
Polyflex Plus PU achieves a BRE Global Environmental Generic A+ Rating. Generic EN 15804 Environmental Product Declaration (EPD) available on request. Polyflex Plus PU is 100% recyclable and contains 25% recycled material. Recyclable via the Recofloor scheme. Visit www.polyflor.com/environment



APPLICATIONS
Polyflex Plus PU is a durable, general purpose vinyl tile suitable for most contract situations. The excellent performance makes Polyflex Plus PU a good choice in schools, supermarkets, offices, etc. The 1.5mm gauge tile is a particularly suitable and economical solution for housing applications.



For information regarding handling and installation, adhesives, maintenance, applications and chemical resistance, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com.

At the date of issue the data presented is correct. However, Polyflor Ltd. reserves the right to make changes which do not adversely affect performance or quality.

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK
UK SALES DIRECT: +44 (0)161 767 1122 UK SAMPLE REQUESTS: +44 (0)161 767 2551
EXPORT SALES DIRECT: +44 (0)161 767 1913 TECHNICAL SUPPORT: +44 (0)161 767 1912
RECEPTION: +44 (0)161 767 1111 UK FAX: +44 (0)161 767 1128
EXPORT FAX: +44 (0)161 767 1166 E-MAIL: INFO@POLYFLOR.COM
WEBSITE: WWW.POLYFLOR.COM

James Holstead
FLOORING



2011



POLYFLOR

POLYFLEX PLUS

SEMI FLEXIBLE TILES

PERFORMANCE AND
PROPERTIES



Refer to BRE Global ratings on www.thegreenguide.org.uk



In collaboration with the European Resilient Flooring Manufacturers' Institute (ERFMI), Polyflor Ltd supports sustainable construction via Environmental Product Declarations (EPDs).

