









Flooring Collection

Commercial and Residential Flooring


Pearlazzo PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

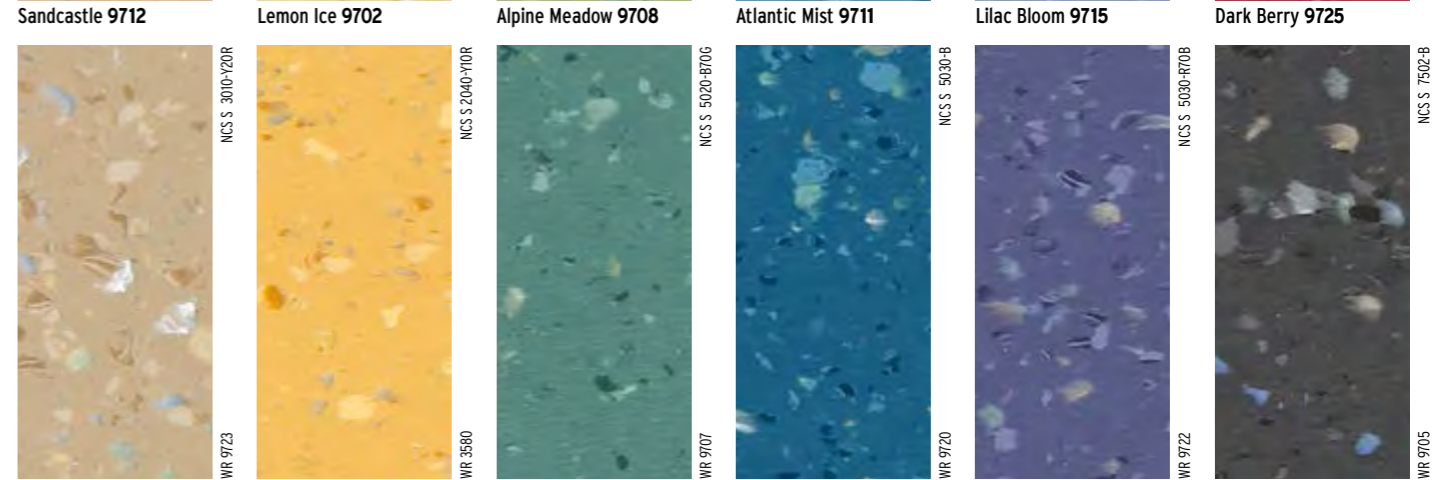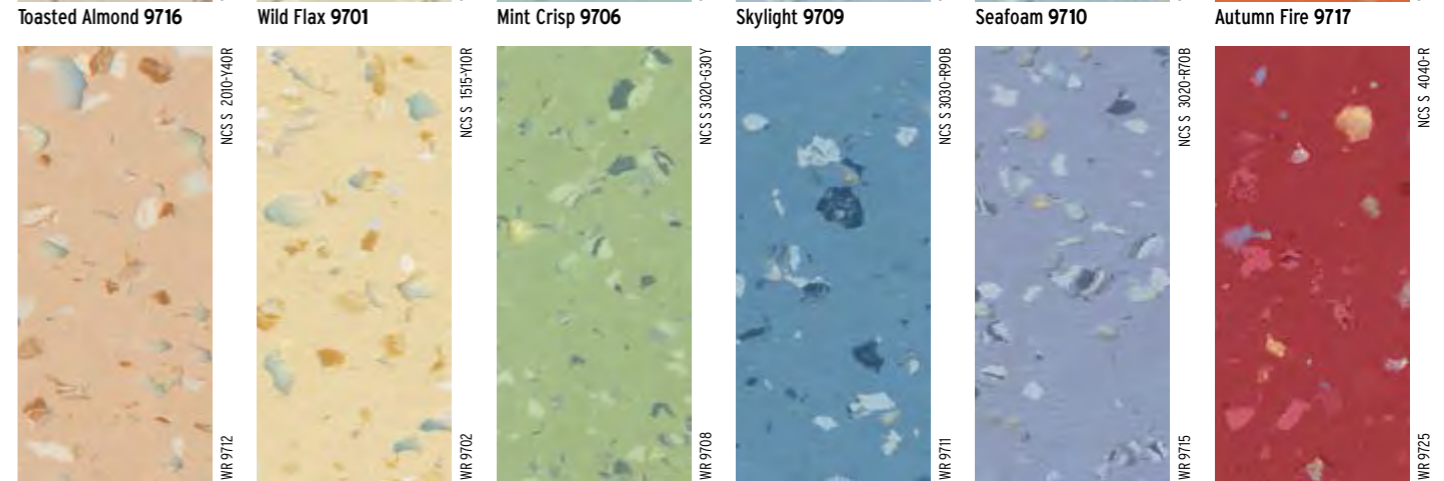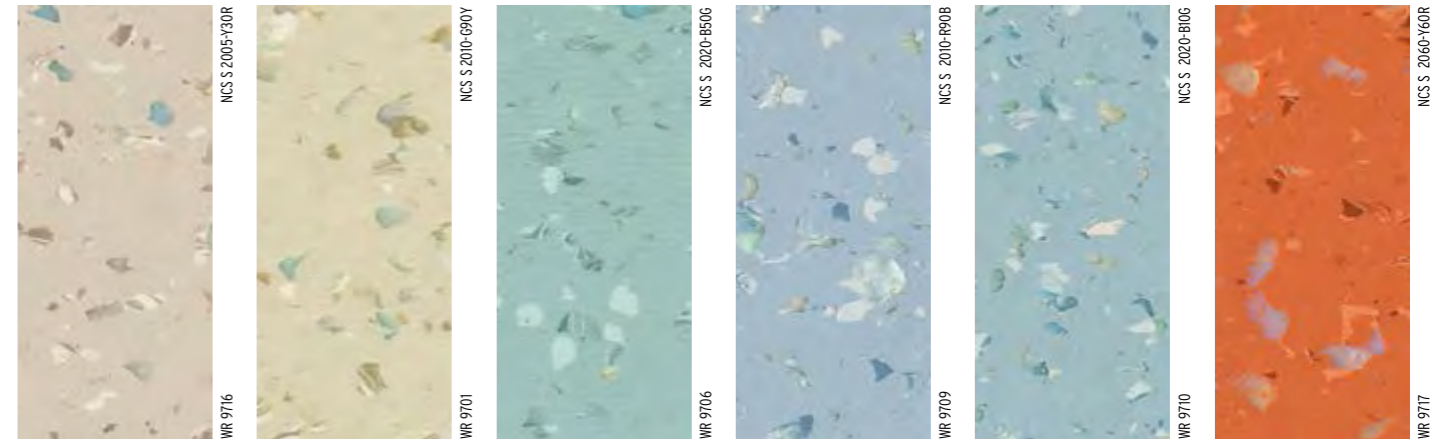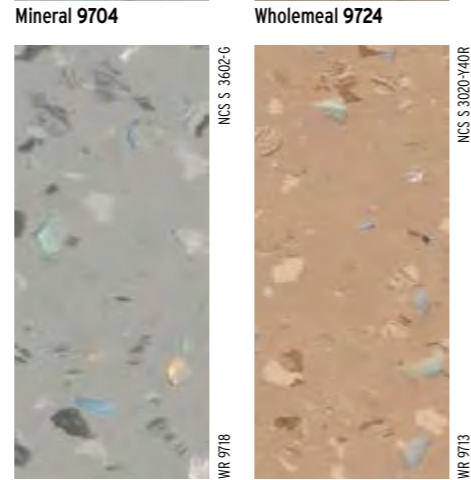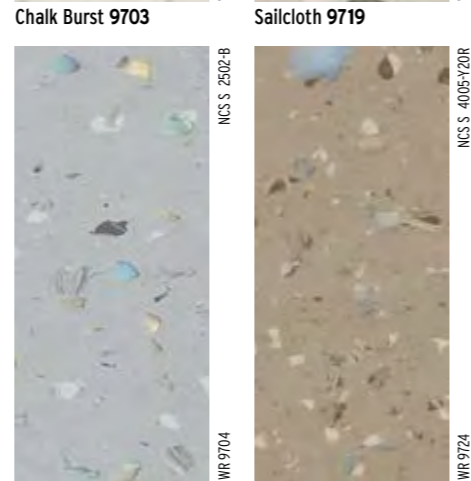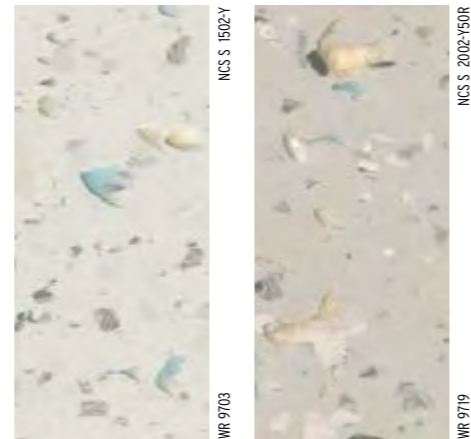

KEY FEATURES

- Attractive, high performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide a low cost, polish-free maintenance regime for the lifetime of the flooring.
- Unique multi-flake decoration.
- Conforms to ASTM F1913.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

WR = weld rod




GAUGE: 2.0mm
AVAILABILITY: Sheet



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


Prestige PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

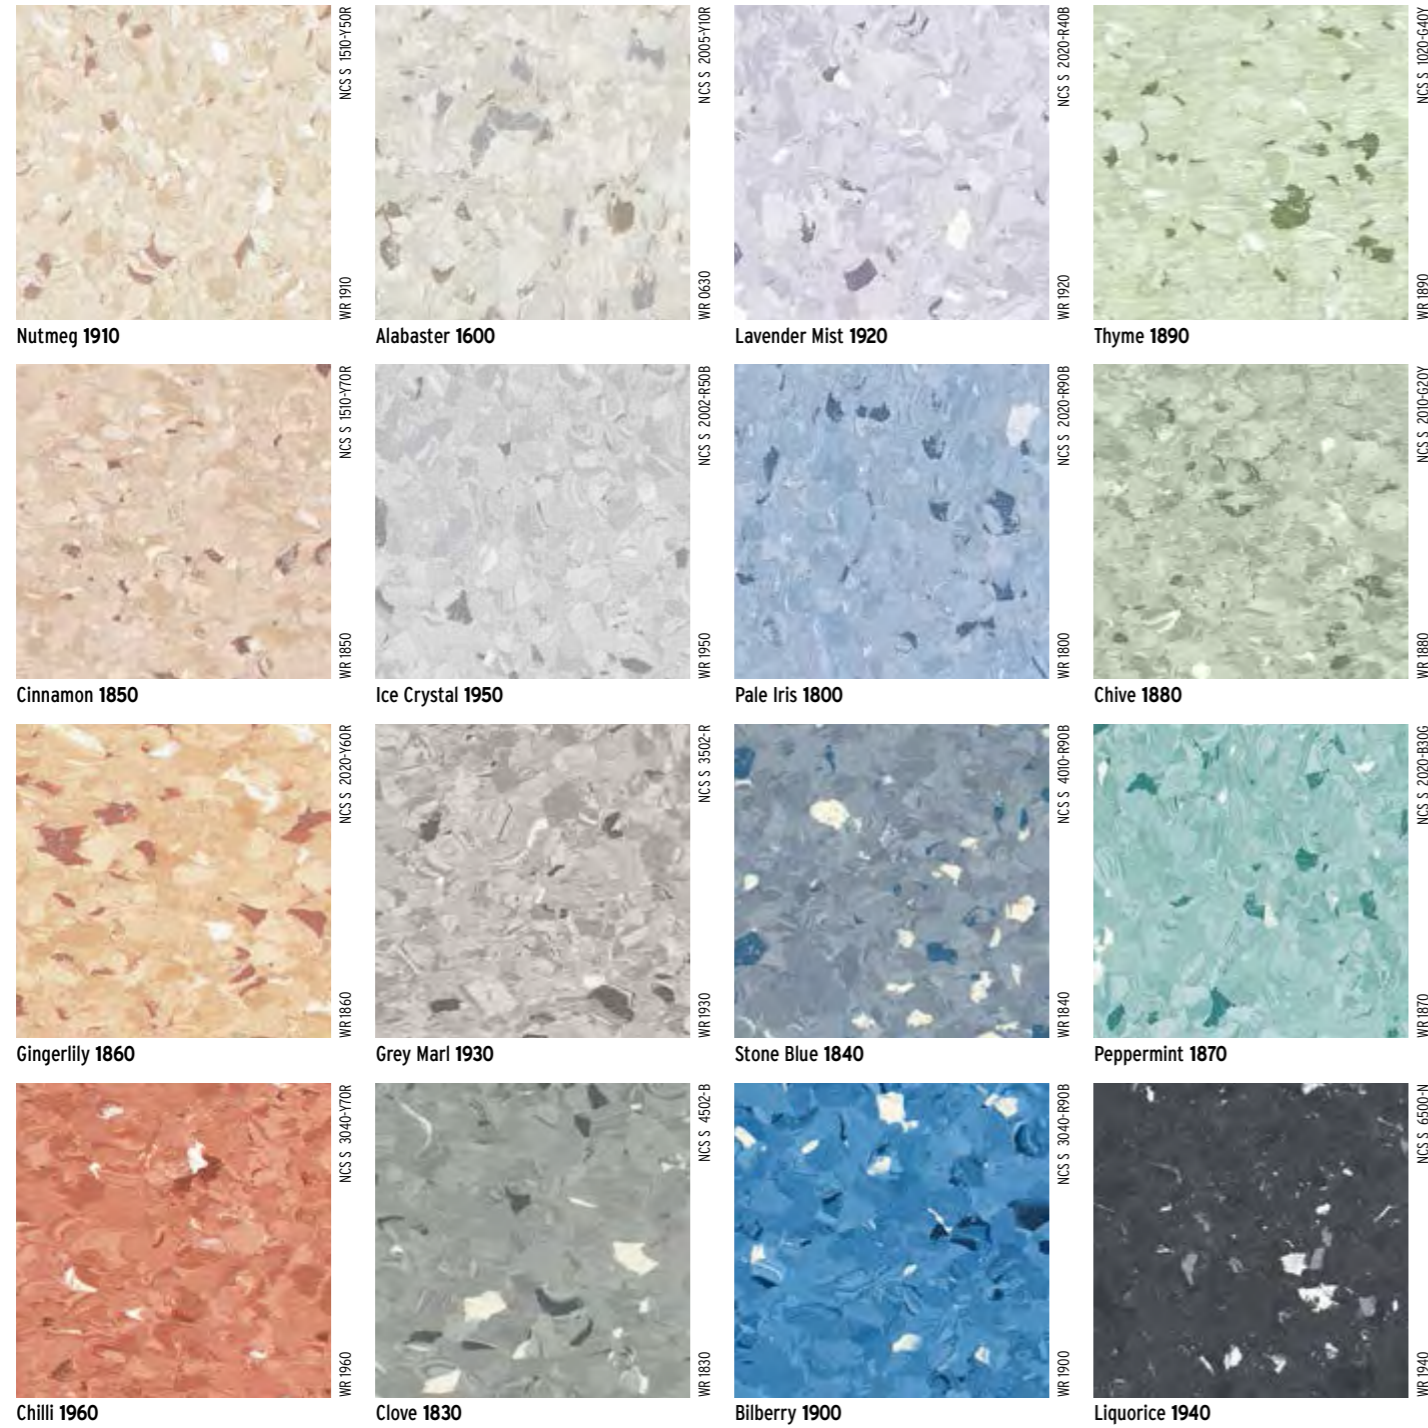

KEY FEATURES

- Attractive, high-performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.
- Non-directional duotone chip decoration with tonal highlight chips.
- Conforms to ASTM F1913 AND F1700.



* Refer to BRE Global ratings on www.greenbooklive.com


SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet
Tile: 300 x 300mm, 608 x 608mm


Classic Mystique PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

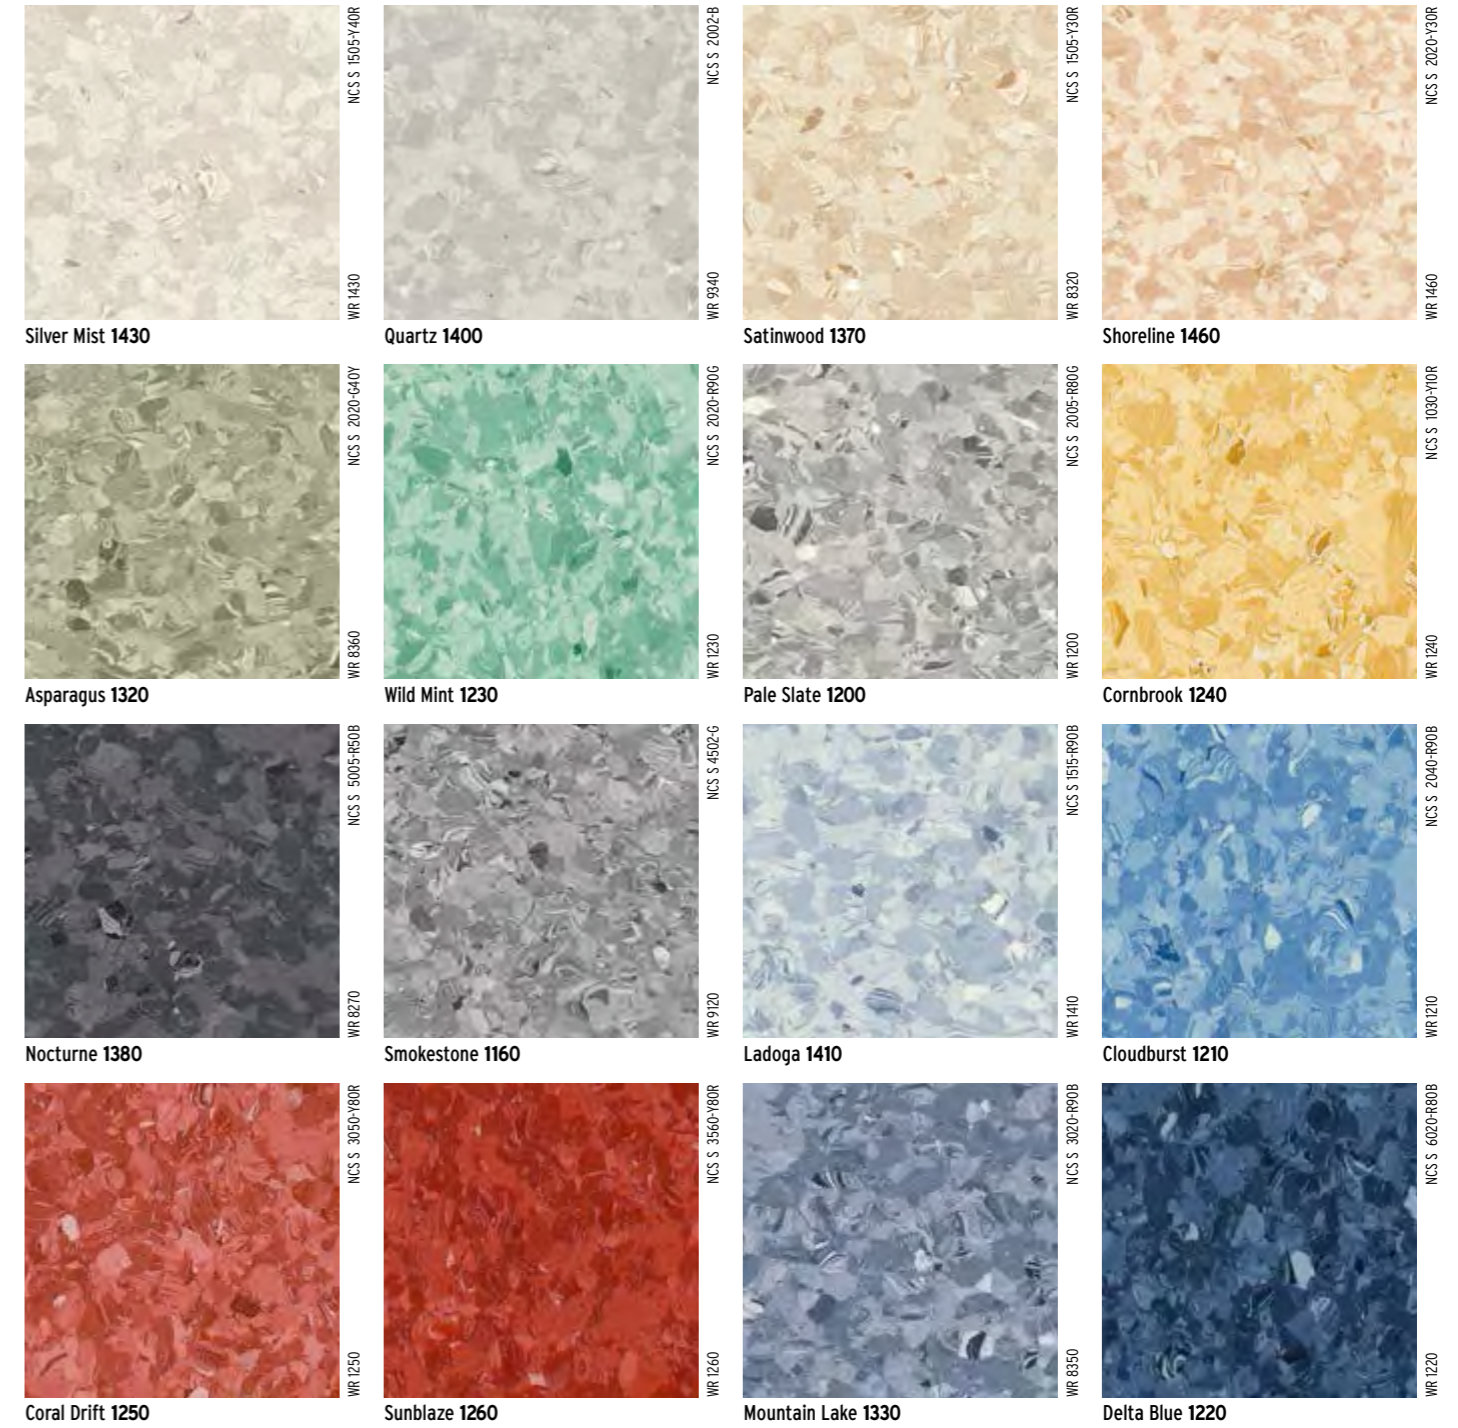

KEY FEATURES

- Attractive, high-performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.
- Non-directional duotone chip decoration with marbled tonal highlight chips.
- Conforms to ASTM F1913 AND F1700.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet
QuickShip 2.0mm sheet only
Tile: 300 x 300mm, 608 x 608mm

2000 PUR

HEAVY-DUTY VINYL FLOORING FEATURING A MARBLEISED DECORATION AND POLYURETHANE REINFORCEMENT



NCS S 3010-Y40R
WR 8850

Buckwheat 8850*




NCS S 2005-Y30R
WR 8820

Dawn Mist 8800




NCS S 2502-Y
WR 8500

Lace Blue 8500*

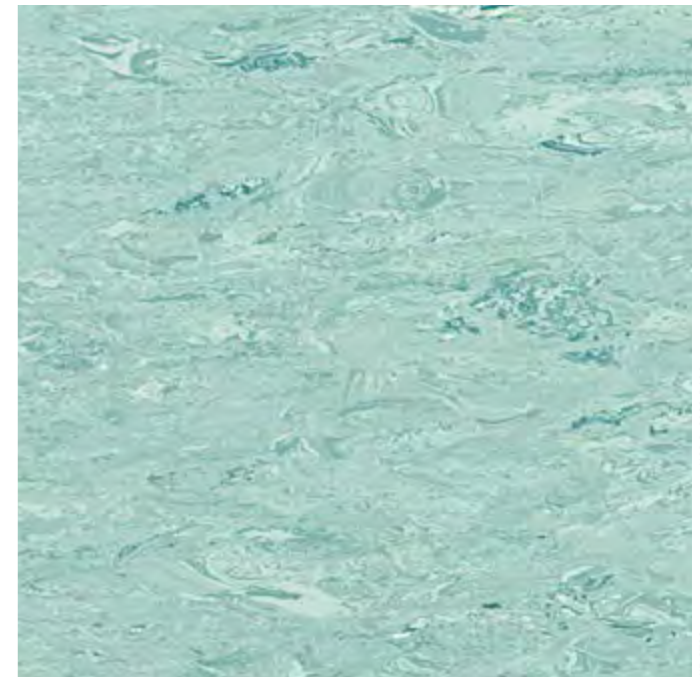


NCS S 2020-B60G
WR 8700

Mint Crest 8700




NCS S 2010-Y30R
WR 8320

Oak 8300*



NCS S 1515-Y30R
WR 8900

Blossom 8900




NCS S 3050-Y70R
WR 8000

Brushed Ochre 8000



NCS S 3010-R90B
WR 8200

Stream 8050



NCS S 4502-B
WR 8230

Stonewall 8230*



NCS S 2030-B
WR 8450

Glacier Blue 8450



NCS S 2005-R70B
WR 8650

Wild Lilac 8650




NCS S 4010-B70G
WR 2120

Willowbank 8380*




NCS S 2050-Y20R
WR 3070

Saffron 8490




NCS S 3020-Y60R
WR 8950

Rosehip 8950




NCS S 3040-Y60R
WR 4120

Sequoia 8400




NCS S 4030-R70B
WR 8600

Thistle 8600



NCS S 7502-B
WR 8270

Shadow 8150




NCS S 4020-R90B
WR 8350

Larkspur 8350*



NCS S 4030-R90B
WR 8550

Sapphire 8550



NCS S 4030-B50G
WR 8750

Glenbeck 8750


KEY FEATURES

Hardwearing, homogeneous commercial floorcovering.

High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.

Directional duotone marbled decoration with marbled highlight tones.

Conforms to ASTM F1700.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS




GAUGE: 2.0mm, 2.5mm
AVAILABILITY: Sheet (2.0mm, 2.5mm)
QuickShip 2.0mm sheet only
Tile: 300 x 300mm (2.0mm, 2.5mm)
 608 x 608mm (2.0mm)

All colours are available ex-stock in 2.0mm.
 * 6 colours are available ex-stock in 2.5mm.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

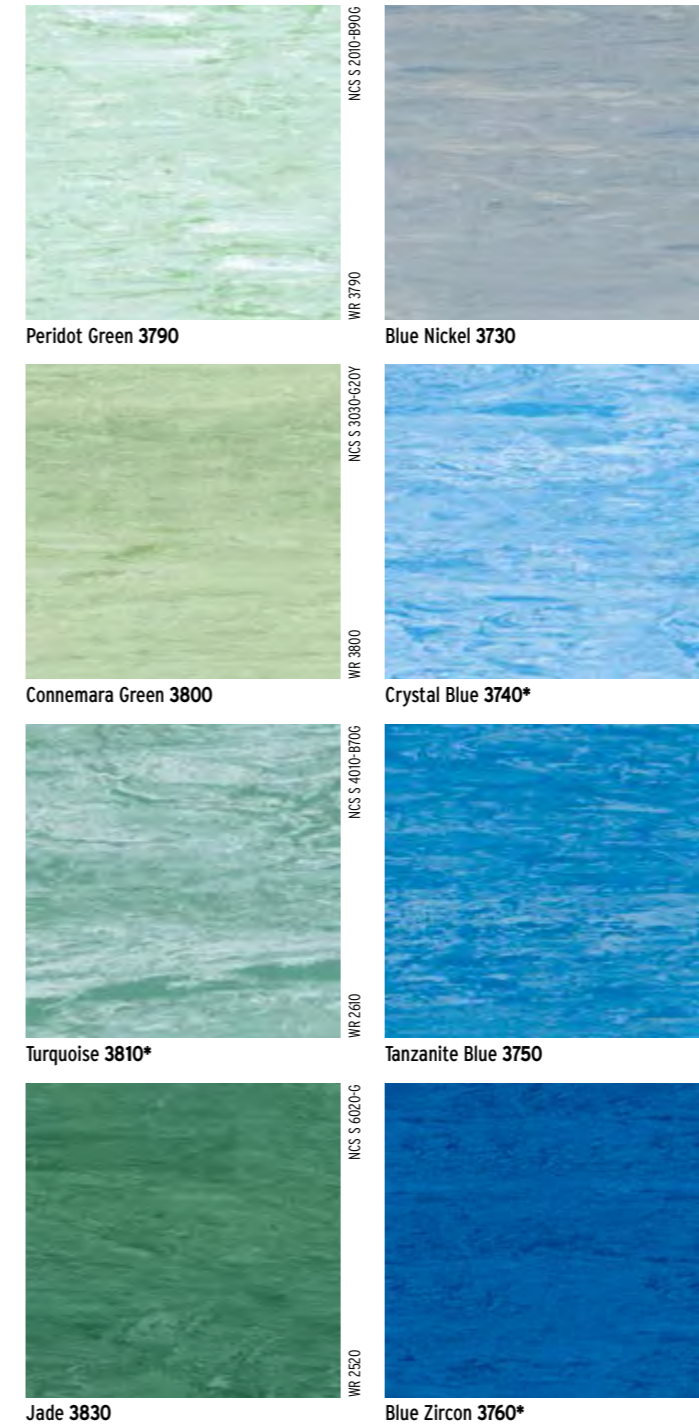


KEY FEATURES

Hardwearing, homogeneous commercial floorcovering.

Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Directional duotone marbled decoration.

Conforms to ASTM F1700.




* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

All colours are available ex-stock in 2.0mm.

* 6 colours are available ex-stock in 1.5mm.




GAUGE: 1.5mm, 2.0mm
 AVAILABILITY: Sheet: (1.5mm, 2.0mm)
 QuickShip 2.0mm sheet only
 Tile: 300 x 300mm (2.0mm), 608 x 608mm (2.0mm)



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Standard XL


HEAVY-DUTY VINYL FLOORING WITH A MARBLEISED DECORATION

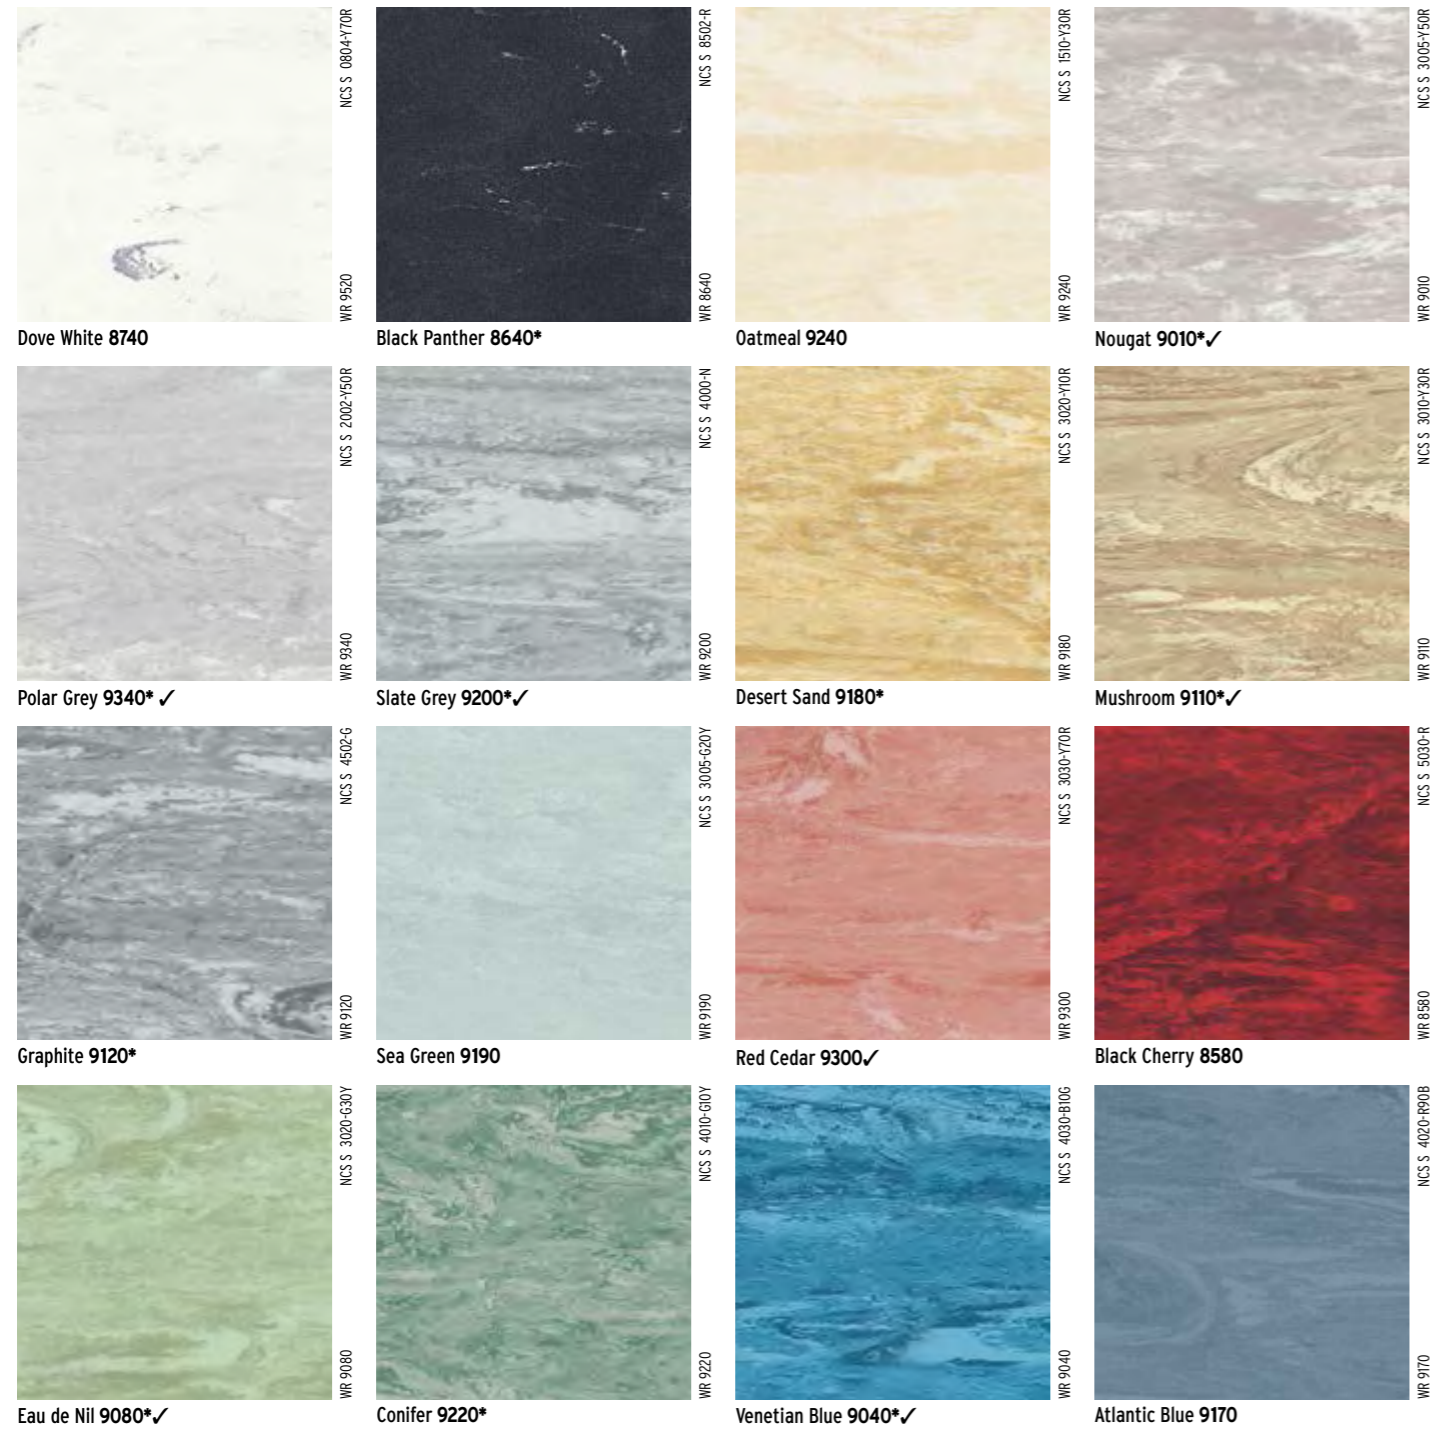

All colours are available ex-stock in 2.0mm. * 10 colours are available ex-stock in 1.5mm. ✓ 7 colours are available ex-stock in 2.5 and 3.0mm.

KEY FEATURES


- Hardwearing, homogeneous commercial floorcovering, in a choice of gauges.
- Directional duotone marbled decoration.
- Conforms to ASTM F1700.



* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS




GAUGE: 1.5mm, 2.0mm, 2.5mm, 3.0mm
AVAILABILITY: Sheet: (1.5mm, 2.0mm, 2.5mm, 3.0mm)
 Tile: 300 x 300mm (2.0mm, 2.5mm, 3.0mm)
 608 x 608mm (2.0mm)

Polyflex Plus PU

ECONOMICAL, GENERAL-PURPOSE VINYL TILE FEATURING A POLYURETHANE SURFACE TREATMENT




Duotone Marbling

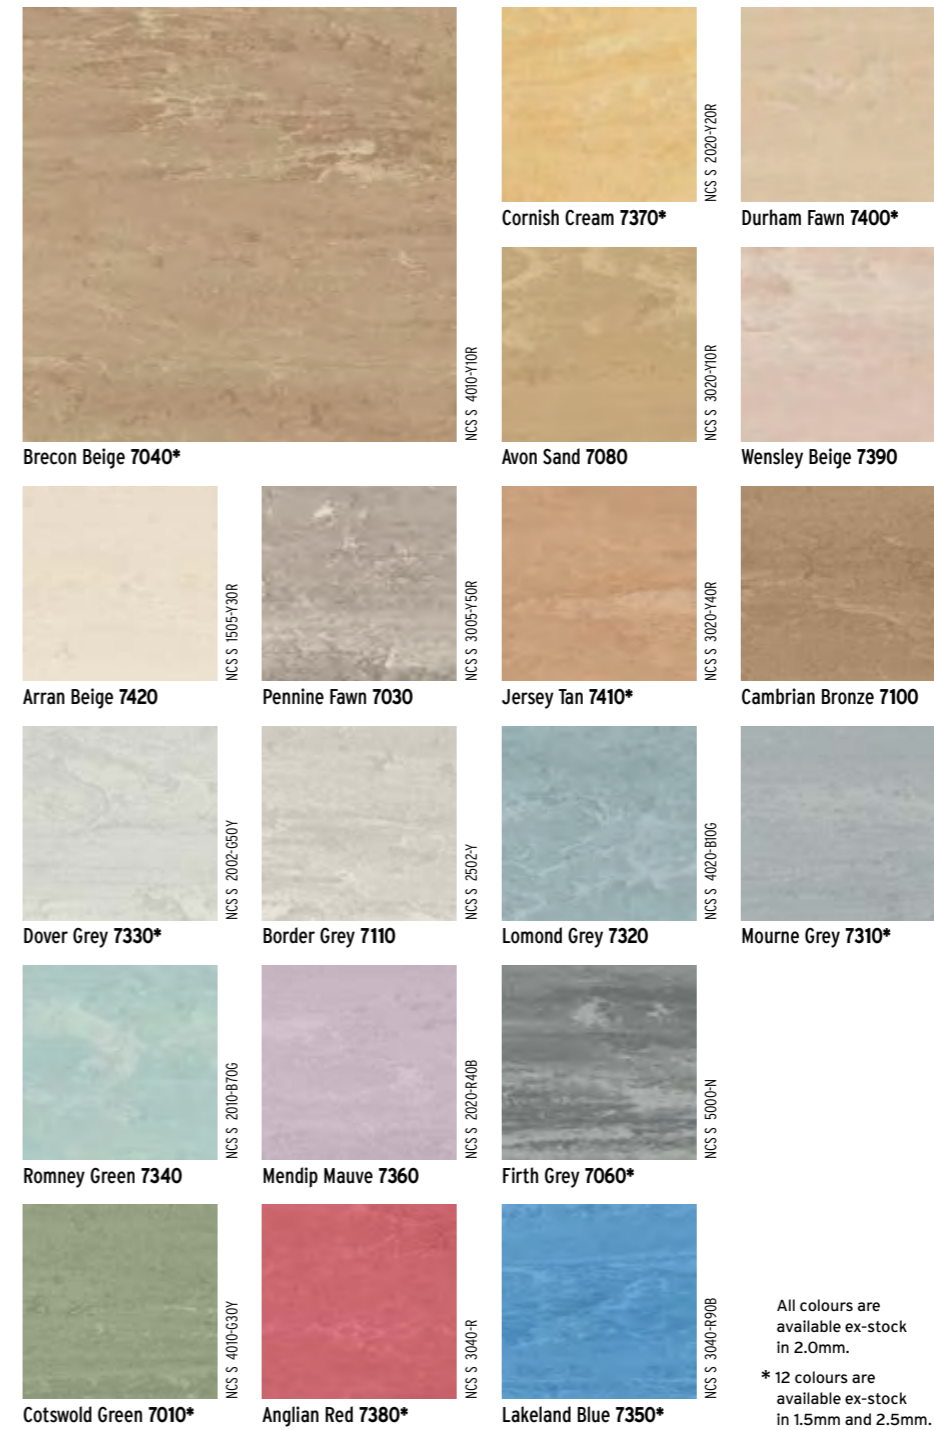

All colours are available ex-stock in 2.0mm.
 * 12 colours are available ex-stock in 1.5mm and 2.5mm.

KEY FEATURES

- General-purpose, homogeneous vinyl tile.
- Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Conforms to EN 649 / EN ISO 10581.
- Available in traditional or duotone marbling.
- Traditional marbling colours include a secondary complementary colour.




† Refer to BRE Global ratings on www.thegreenguide.org.uk

Traditional Marbling




SPECIFICATIONS

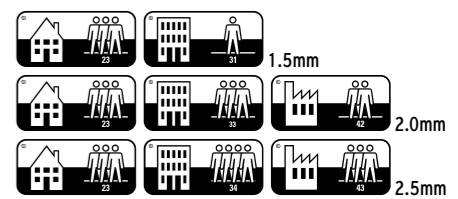

GAUGE: 1.5mm, 2.0mm, 2.5mm
AVAILABILITY: Tile: 300 x 300mm

Polysafe Modena PUR

HEAVY-DUTY SAFETY FLOORING FEATURING CLEAR MICRO-GRANITE DESIGNS

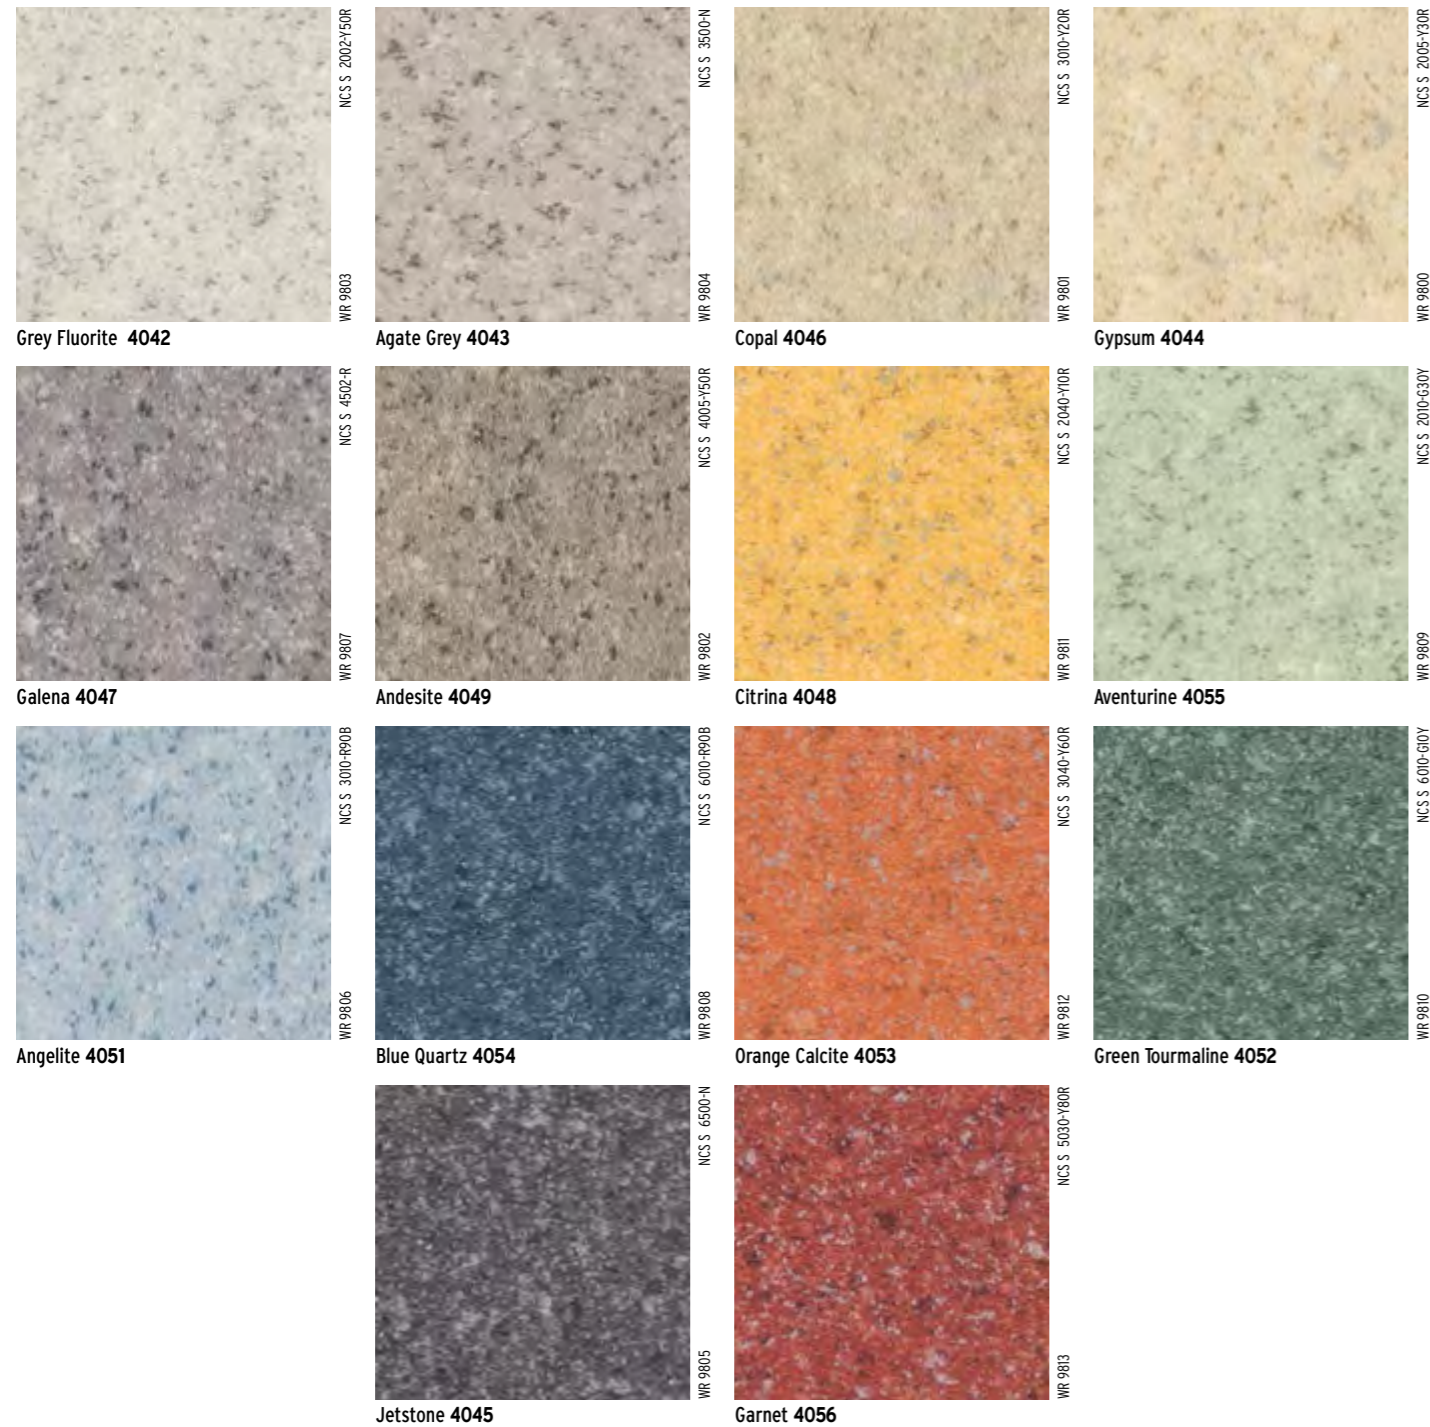

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.
 Hardwearing safety flooring featuring high clarity micro granite designs.
 Incorporates aluminium oxide particles to improve traction and safety underfoot.
 Slip resistance is assured for the guaranteed life of the product.
 ≥36 (Pendulum wet test - 4S Rubber/Slider 96).
 Conforms to EN 13845 50,000 cycles abrasion test and ASTM F1303.



† Refer to BRE Global ratings on www.thegreenguide.org.uk


SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm
AVAILABILITY: Sheet

Polysafe Arena PUR

HEAVY-DUTY SAFETY FLOORING FEATURING ABSTRACT, MATERIAL AND STONE DESIGNS

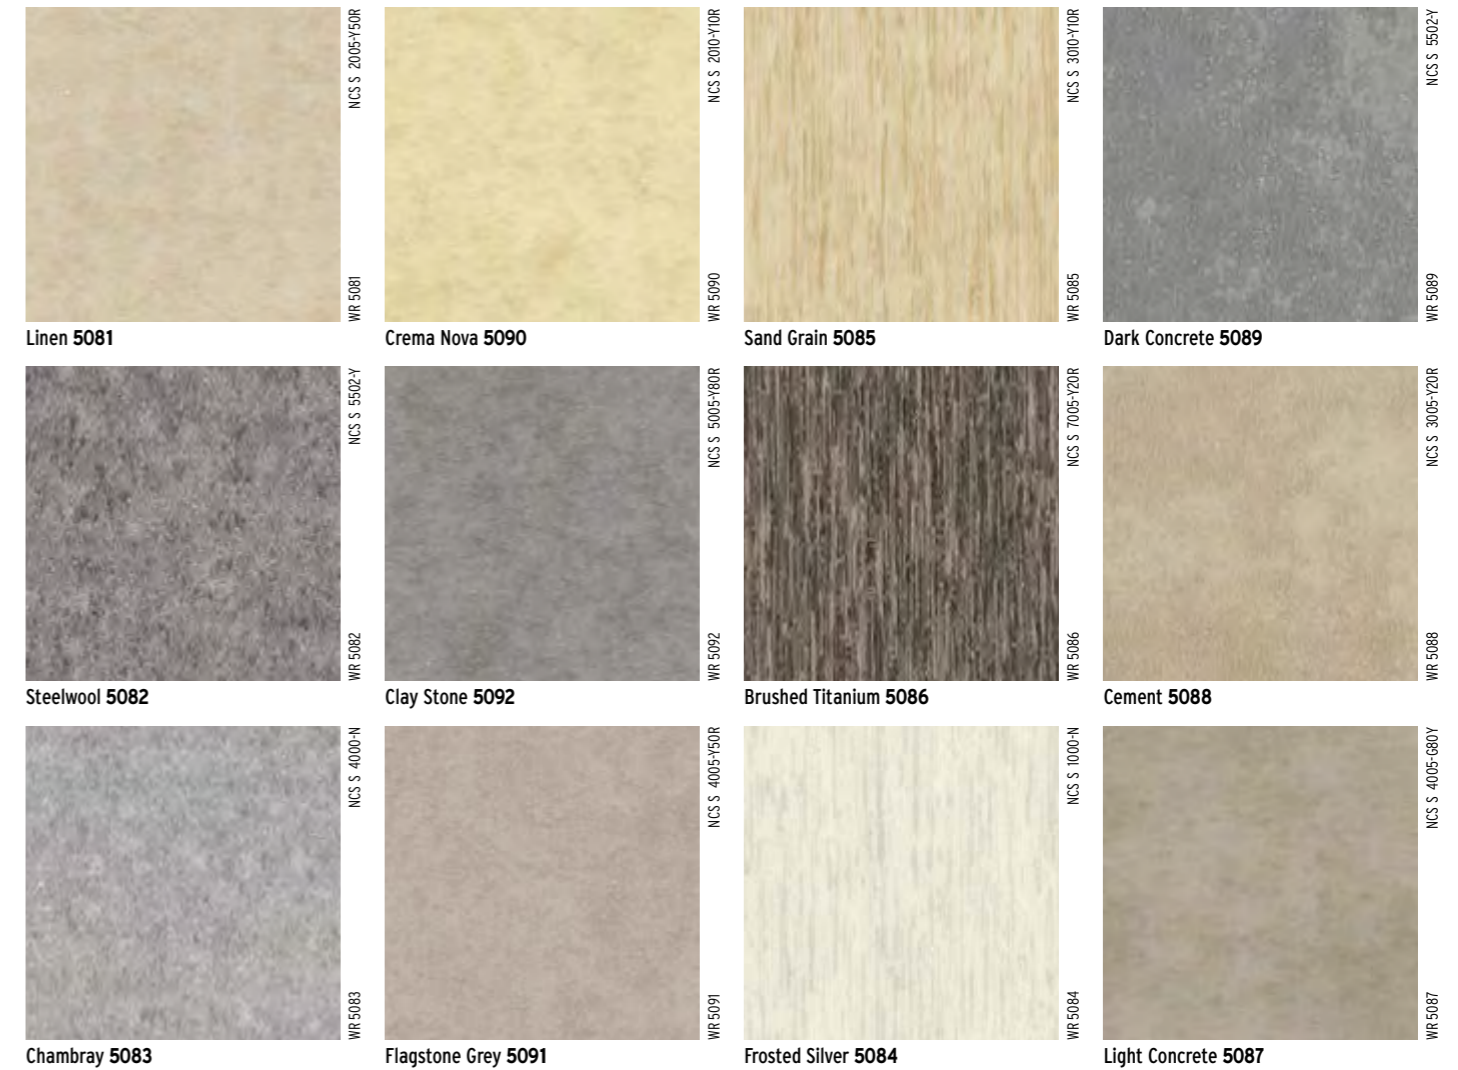

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.
 Hardwearing safety flooring featuring high clarity abstract, stone and material effects.
 Incorporates aluminium oxide particles to improve traction and safety underfoot.
 Slip resistance is assured for the guaranteed life of the product.
 ≥36 (Pendulum wet test - 4S Rubber/Slider 96).
 Conforms to EN 13845 50,000 cycles abrasion test and ASTM F1303.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm
AVAILABILITY: Sheet

Polysafe Verona PUR

DECORATIVE HEAVY-DUTY SAFETY FLOORING WITH COMPLEMENTARY CHIPS AND CARBORUNDUM-FREE DESIGN

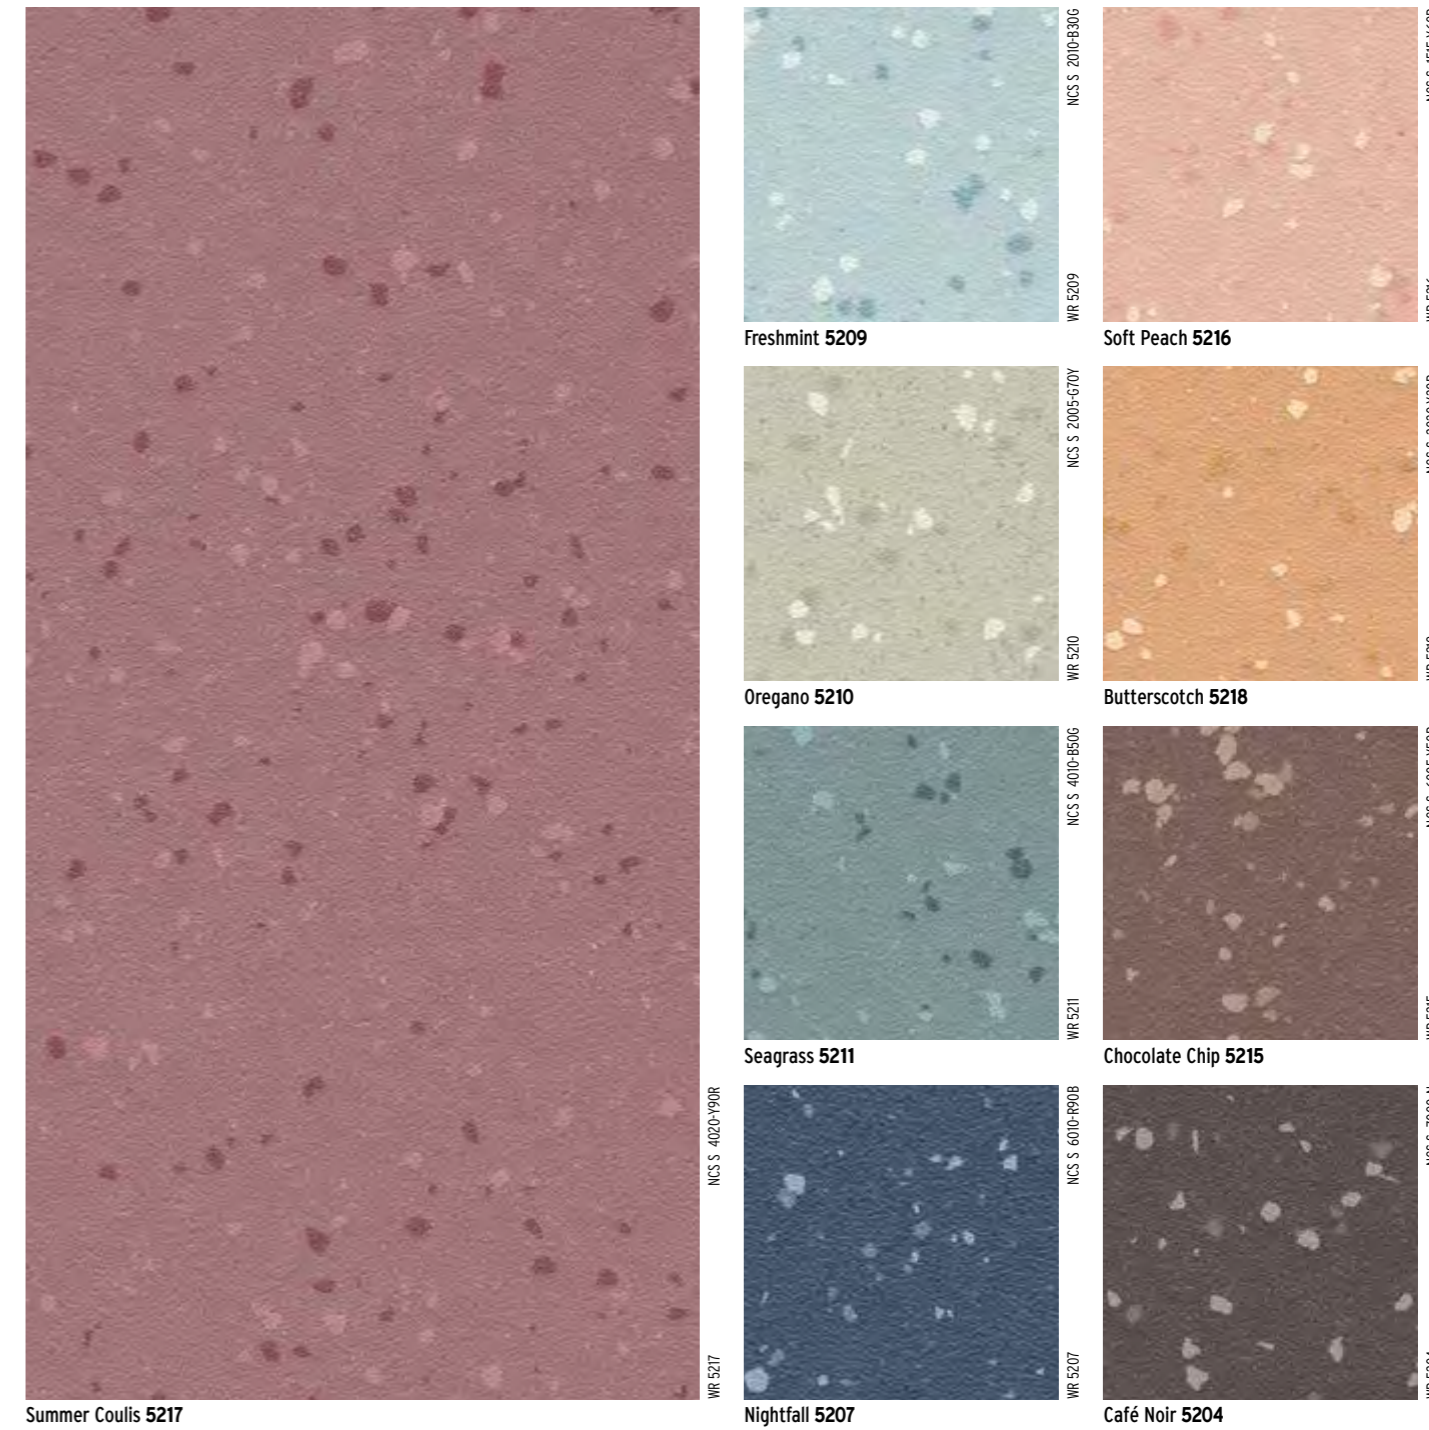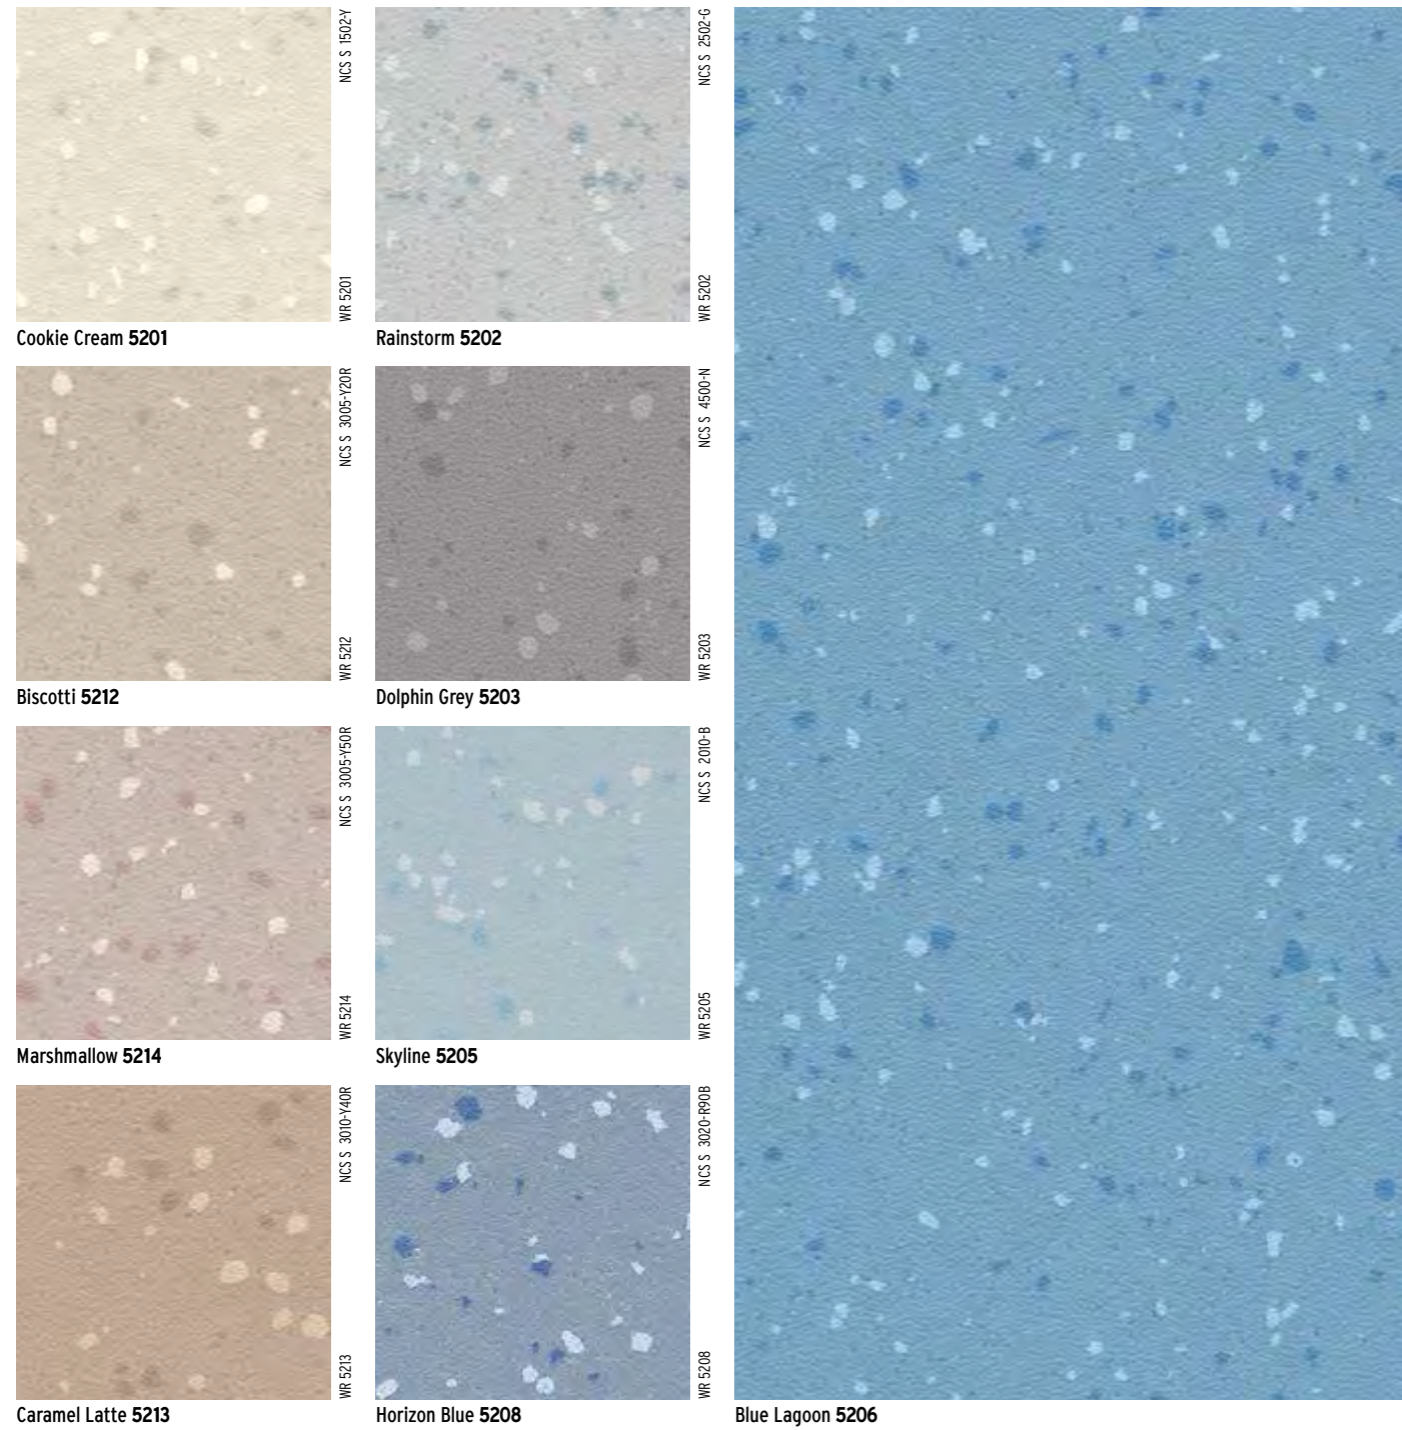

KEY FEATURES

Carborundum-free safety flooring with high decorative appeal.
 18 subtle pastel shades complemented by bold statement colours.
 Features complementary coloured quartz particles and natural recycled aggregates to enable a high clarity appearance.
 Slip resistance is assured for the guaranteed life of the product ≥ 36 (Pendulum wet test).
 Conforms to EN 13845 50,000 cycles abrasion test and ASTM F1303.



† Refer to BRE Global ratings on www.thegreenguide.org.uk

SPECIFICATIONS




GAUGE: 2.0mm
 AVAILABILITY: Sheet



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Polysafe Mosaic PUR

HEAVY-DUTY SAFETY FLOORING WITH HIGH DENSITY FLAKE DECORATION AND PEARLESCENT

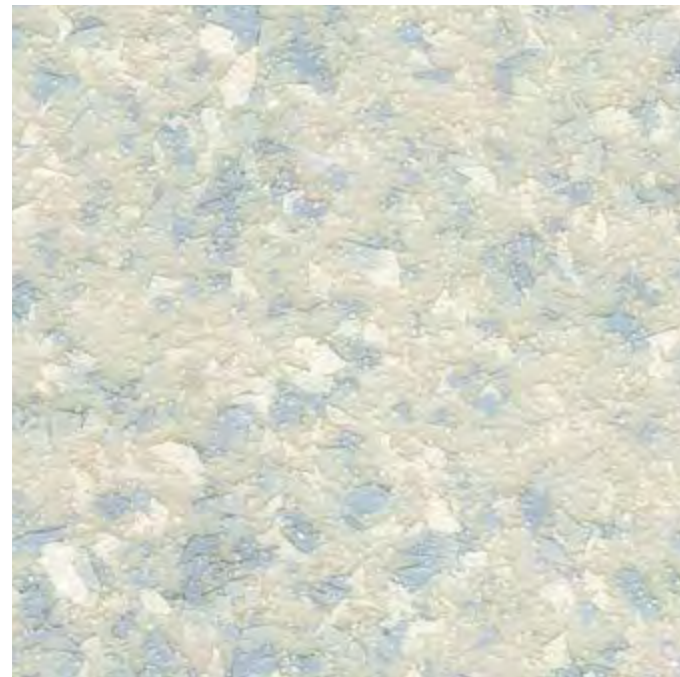

NCS S 2005-G70Y
WR 4115

Pearlite 4115



NCS S 3010-Y40R
WR 4155

Earthstone 4155



NCS S 3010-Y20R
WR 4125

Akoya 4125




NCS S 5500-N
WR 4135

Orient Grey 4135



NCS S 4010-G10Y
WR 4195

Green Opal 4195

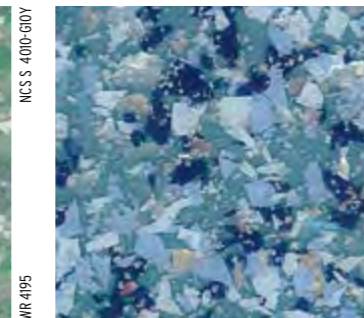


NCS S 4020-B10G
WR 4145

Freshwater 4145



NCS S 3502-Y
WR 4105

Grey Fusion 4105



NCS S 3030-Y70R
WR 4185

Sunstone 4185



NCS S 5020-R90B
WR 4175

South Sea 4175



NCS S 6500-N
WR 4165

Graphite Pearl 4165

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates aluminium oxide and coloured quartz particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product. ≥ 36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test and ASTM F1303.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm
AVAILABILITY: Sheet

It is recommended that a larger piece is viewed at floor level to appreciate the decoration


Polysafe Apex

HEAVY-DUTY SAFETY FLOORING WITH ENHANCED SLIP RESISTANCE FOR EXTREME AREAS




NCS S 5005-G50Y
WR 4350

Green Quartz 4201




NCS S 6500-N
WR 4610

Chromite 4202



NCS S 8000-N
WR 8640

Biotite 4203




NCS S 5010-R90B
WR 4670

Breccia 4204



NCS S 5005-Y80R
WR 4600

Siltstone 4205



NCS S 5030-Y80R
WR 4206

Red Ochre 4206



KEY FEATURES

Enhanced levels of traction and safety underfoot due to high aggregate concentration and a specially engineered emboss.

Designed for busy commercial kitchen areas serving over 100 daily meals and suited to industrial food processing environments with regular spillage of oil and grease.

Slip resistance is assured for the guaranteed life of the product ≥ 45 (Pendulum wet test - 4S Rubber) with surface roughness of $Rz \geq 70\mu m$.

R12 rated product and conforms to ASTM F1303



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


SPECIFICATIONS



GAUGE: 2.5mm
AVAILABILITY: Sheet

NEW Polysafe Vogue Ultra PUR

HEAVY-DUTY, DECORATIVE SAFETY FLOORING WITH MULTI-CHIP DESIGNS

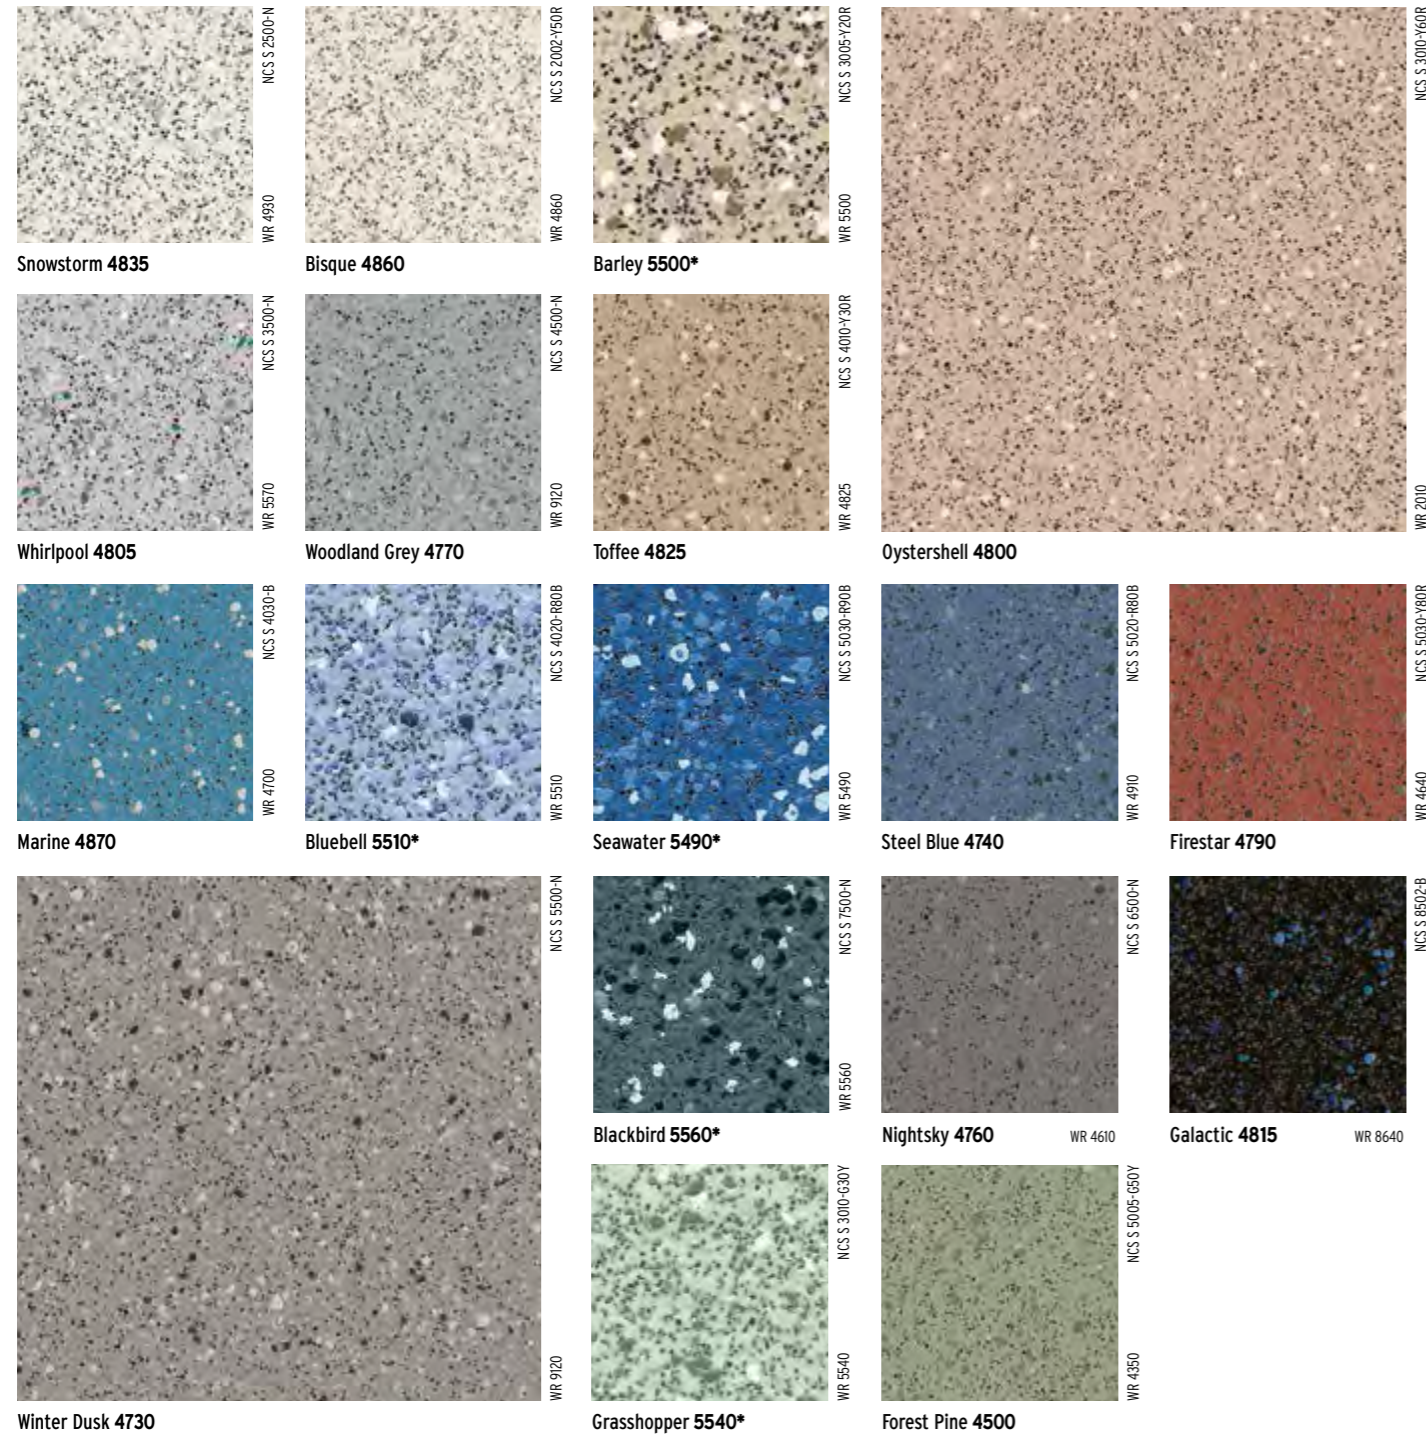

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS




GAUGE: 2.0mm

AVAILABILITY: Sheet: 2m x 20m

*Previously available as Polysafe Corona PUR colours.

Polysafe Standard PUR

HEAVY-DUTY SAFETY FLOORING WITH A TRADITIONAL DECORATION

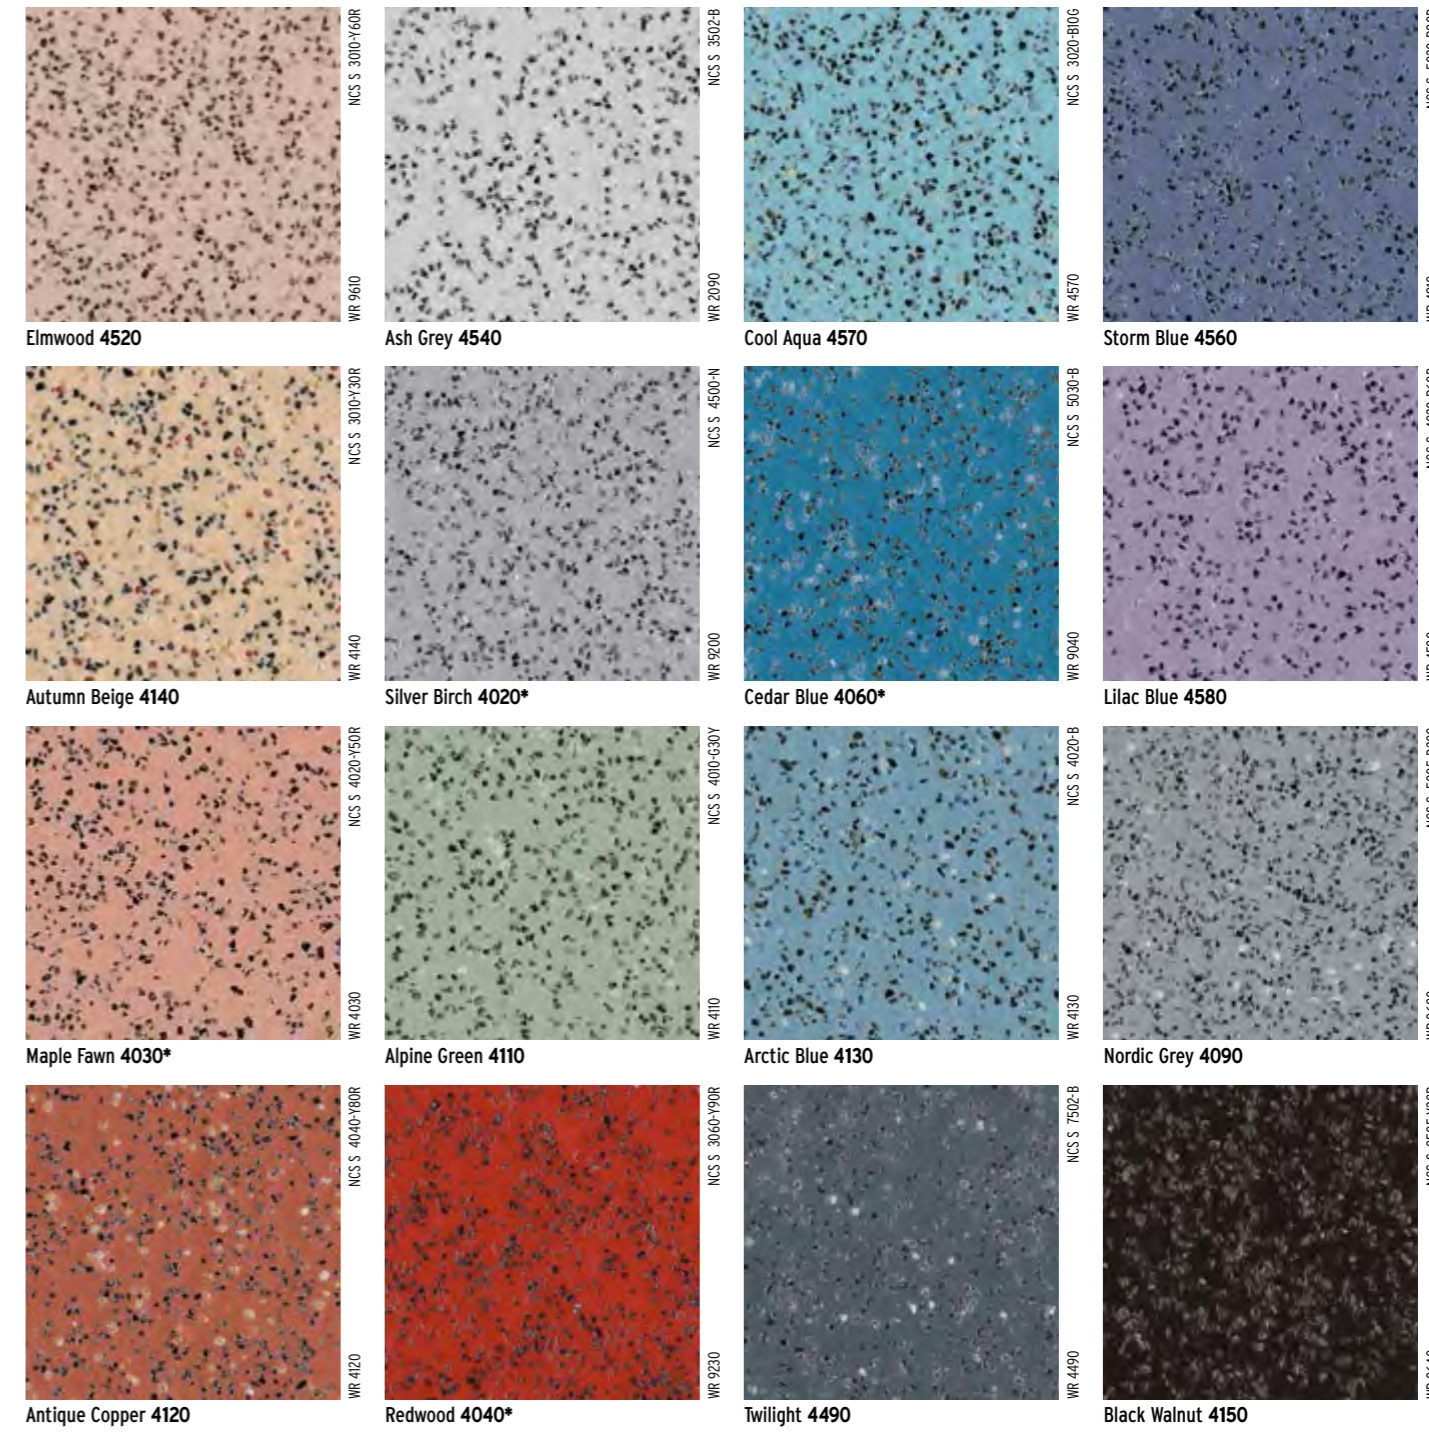

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test and ASTM F1303.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS




GAUGE: 2.0mm, 2.5mm, 3.5mm*

AVAILABILITY: Sheet


* 4 colours are available ex-stock in 3.5mm.

Polysafe Hydro


HEAVY-DUTY SAFETY FLOORING WITH A RAISED EMOSS, FOR USE IN BAREFOOT WET AREAS

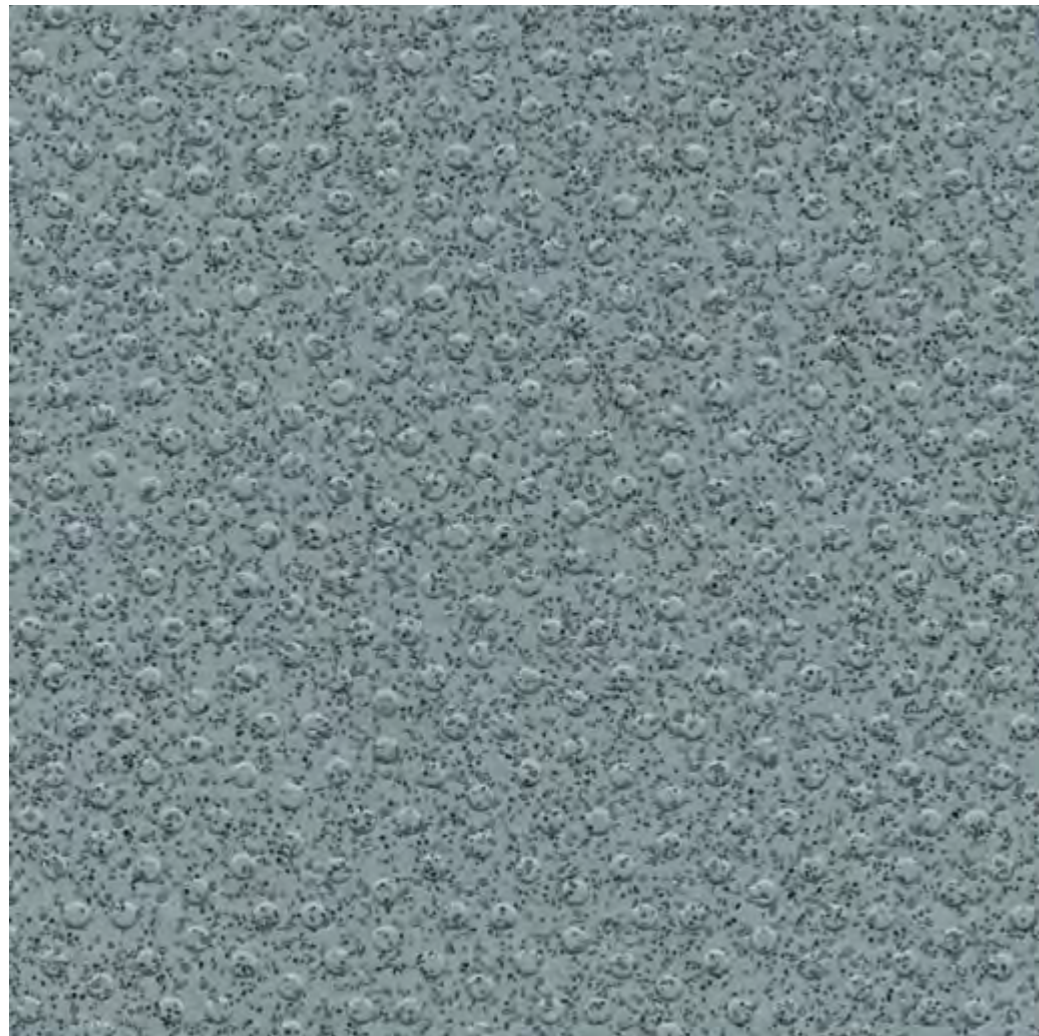


Sheared Slate H4960




Oystershell H4800




Bisque H4860




White Stone H4930




Marine H4870



Blue Forge H4850




Tempered Steel H4940




Woodland Grey H4770

Polysafe Hydro Evolve


HEAVY-DUTY SAFETY FLOORING WITH A RAISED EMOSS, FOR USE IN BAREFOOT WET AREAS

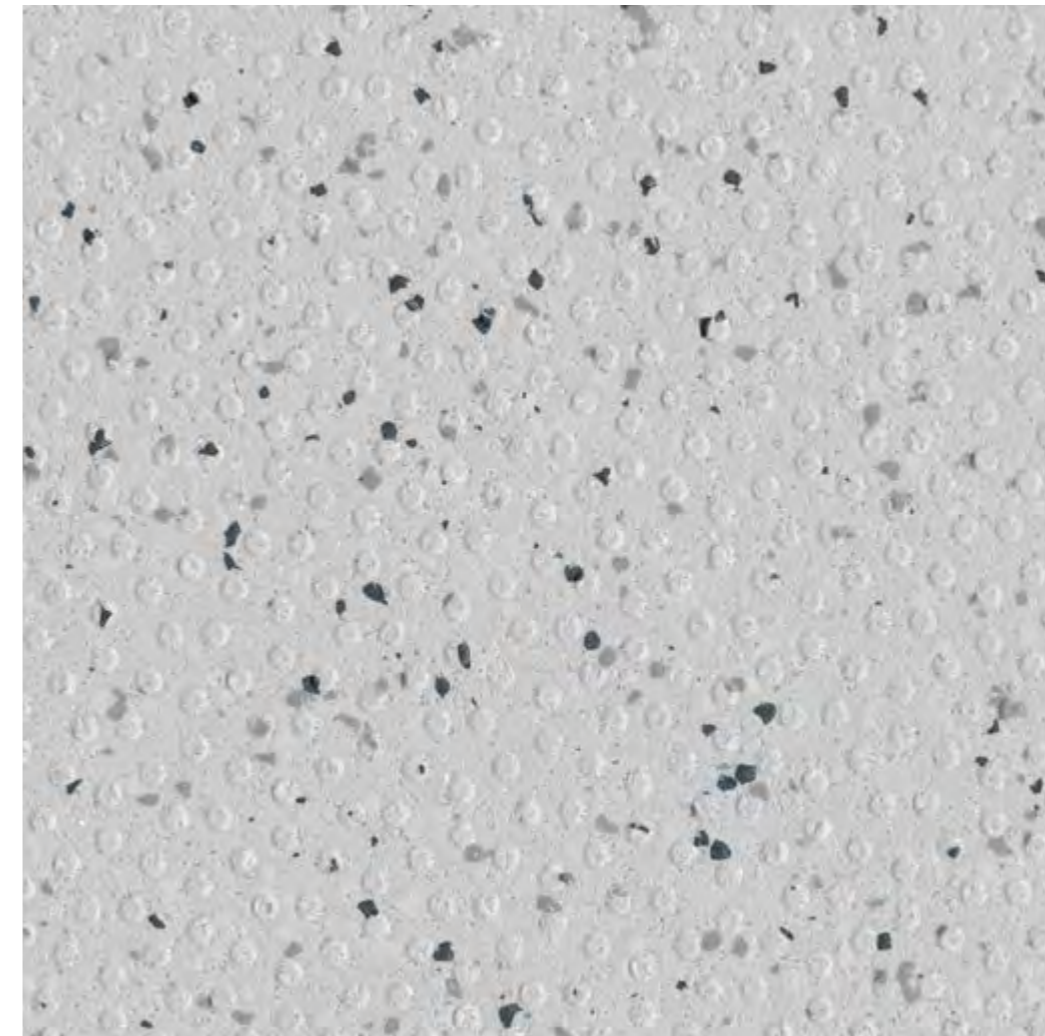


Colorado 4253



Tigris 4257




Blue Nile 4256




Adriatic 4258



Danube 4254



Amazon 4252

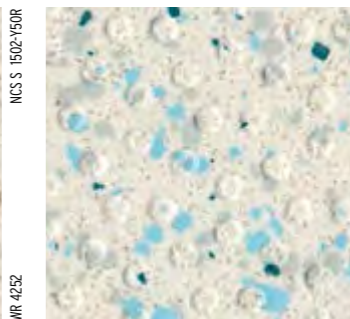

Indus 4251



Black Volta 4255

KEY FEATURES

Designed for barefoot and continually wet areas. Can also be used in shod areas subject to risk assessment.

Features raised pimple emboss and a choice of multi-chip or traditional decorations.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - TRL/4S Rubber).

Conforms to EN 13845 50,000 cycles abrasion test and ASTM F1303.



SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet

KEY FEATURES

Designed for barefoot and continually wet areas. Can also be used in shod areas subject to risk assessment.

Features raised pimple emboss and a choice of multi-chip or traditional decorations.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - TRL/4S Rubber).

Conforms to EN 13845 50,000 cycles abrasion test and ASTM F1303.



SPECIFICATIONS




GAUGE: 2.0mm
AVAILABILITY: Sheet

Polysafe Wood fx PUR


HEAVY-DUTY SAFETY FLOORING FEATURING SOPHISTICATED WOOD DESIGNS



plank w/l: 166 x 1500mm
WR 3374

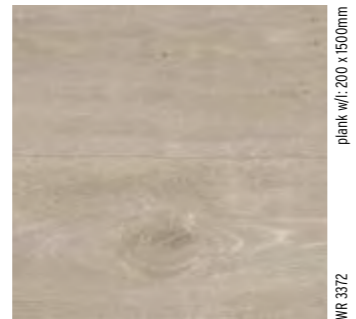

plank w/l: 200 x 1500mm
WR 3372




plank w/l: 83 x 333/666mm
WR 3357


Oiled Oak 3374

Sun Bleached Oak 3372


Silver Oak 3357



plank w/l: 166 x 1500mm
WR 9831



plank w/l: 166 x 1500mm
WR 9822

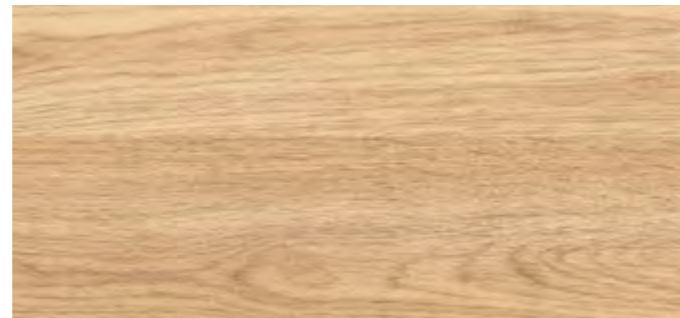


plank w/l: 100 x 1000mm
WR 3380


Roasted Lined Ash 3375

Tropical Pine 3376


American Oak 3387

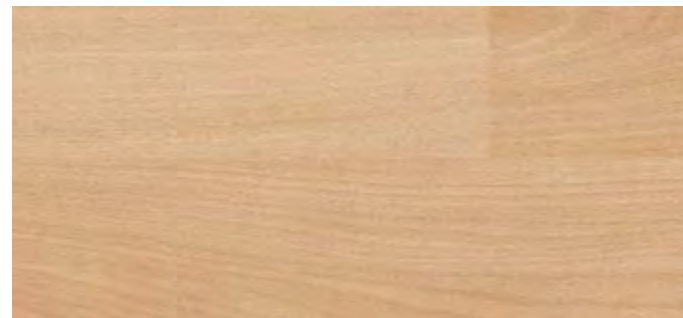

plank w/l: 100 x 500mm
WR 3290

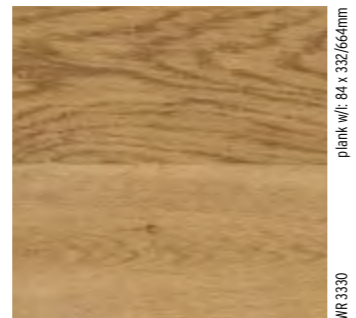

plank w/l: 84 x 332/664mm
WR 3330




plank w/l: 166 x 1500/4mm
WR 3330


Warm Beech 3297

Rustic Oak 3337


Classic Oak 3107



plank w/l: 100 x 1000mm
WR 3340



plank w/l: 200 x 1500mm
WR 9824

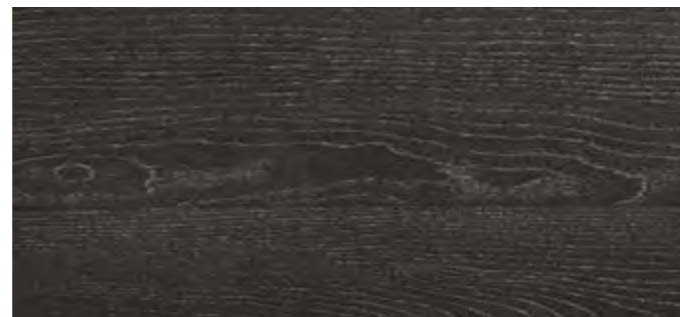

plank w/l: 125 x 1000mm
WR 9842

European Oak 3347

Aged Oak 3373

Nero Oak 3371

KEY FEATURES

- Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.
- Hardwearing safety floorcovering featuring authentic and contemporary wood designs. Incorporates aluminium oxide particles to improve traction and safety underfoot.
- Slip resistance is assured for the guaranteed life of the product.
- ≥36 (Pendulum wet test - 4S Rubber/Slider 96).
- Conforms to EN 13845 50,000 cycles abrasion test and ASTM F1303.



† Refer to BRE Global ratings on www.thegreenguide.org.uk

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm
AVAILABILITY: Sheet

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Polysafe Wood fx Acoustix PUR

HEAVY-DUTY SAFETY FLOORING WITH ACOUSTIC PROPERTIES, FEATURING SOPHISTICATED WOOD DESIGNS




plank w/l: 133 x 1000mm
WR 3990

Brazilian Walnut 3992




plank w/l: 133 x 1000mm
WR 3327

Silver Oak 3352

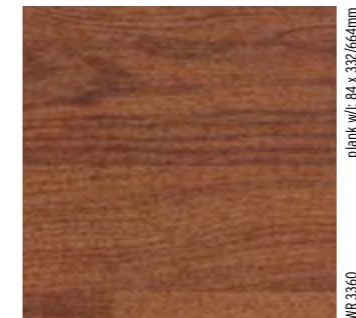


plank w/l: 84 x 332/664mm
WR 3360

Mahogany 3362

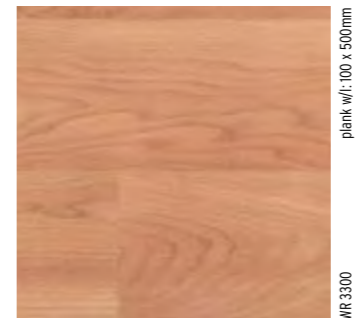


plank w/l: 100 x 500mm
WR 3300

Cherry 3302

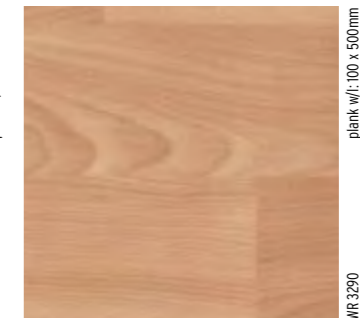

plank w/l: 100 x 500mm
WR 3290

Warm Beech 3292




plank w/l: 100 x 1000mm
WR 3380

American Oak 3382



plank w/l: 84 x 332/664mm
WR 3330

Rustic Oak 3332

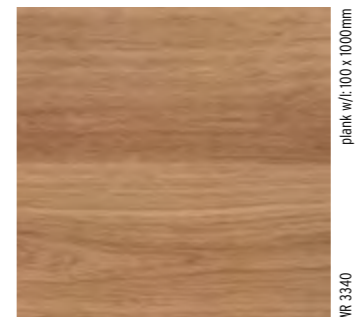

plank w/l: 100 x 1000mm
WR 3340

European Oak 3342

KEY FEATURES

- Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.
- Hardwearing safety floorcovering featuring authentic and contemporary wood designs. Slip resistance is assured for the guaranteed life of the product.
- ≥36 (Pendulum wet test - 4S Rubber/Slider 96).
- ≥19dB impact sound reduction level to exceed Building Regulation Part E requirements.
- Ergonomically designed for anti-fatigue benefits. Conforms to ASTM F1303.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS




GAUGE: 3.7mm, wear layer 0.65mm
AVAILABILITY: Sheet

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.


Forest fx PUR

HARDWEARING COMMERCIAL WOOD EFFECT SHEET VINYL FLOORCOVERING




plank w/l: 100 x 500mm

WR 3290




plank w/l: 100 x 500mm

WR 3290



plank w/l: 100 x 1000mm

WR 3380



plank w/l: 167 x 1500mm

WR 2990


Vermont Maple 3090

Warm Beech 3290

American Oak 3380


Oiled Oak 2990

WIDE PLANK DESIGN




plank w/l: 84 x 332/664mm

WR 3330




plank w/l: 100 x 1000mm

WR 3340



plank w/l: 100 x 500mm

WR 3310



plank w/l: 167 x 1500mm

WR 3330


Rustic Oak 3330

European Oak 3340

Rich Cherry 3310


Classic Oak 3100

WIDE PLANK DESIGN



plank w/l: 100 x 500mm

WR 3110




plank w/l: 167 x 1500mm

WR 3150



plank w/l: 167 x 1000mm

WR 3230



plank w/l: 167 x 1000mm

WR 3120

Stained Maple 3110

Smoked Oak 3150


WIDE PLANK DESIGN

Classic Walnut 3230

WIDE PLANK DESIGN


French Walnut 3120

WIDE PLANK DESIGN



plank w/l: 84 x 332/664mm

WR 3360



plank w/l: 133 x 1000mm


WR 3990

Mahogany 3360

Brazilian Walnut 3990

KEY FEATURES

- Heterogeneous commercial vinyl sheet floorcovering.
- Highly realistic wood designs in a choice of 14 shades.
- Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.
- Conforms to ASTM F1303.



SPECIFICATIONS




GAUGE: 2.0mm, wear layer 0.7mm
AVAILABILITY: Sheet

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.


Acoustix Forest fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB

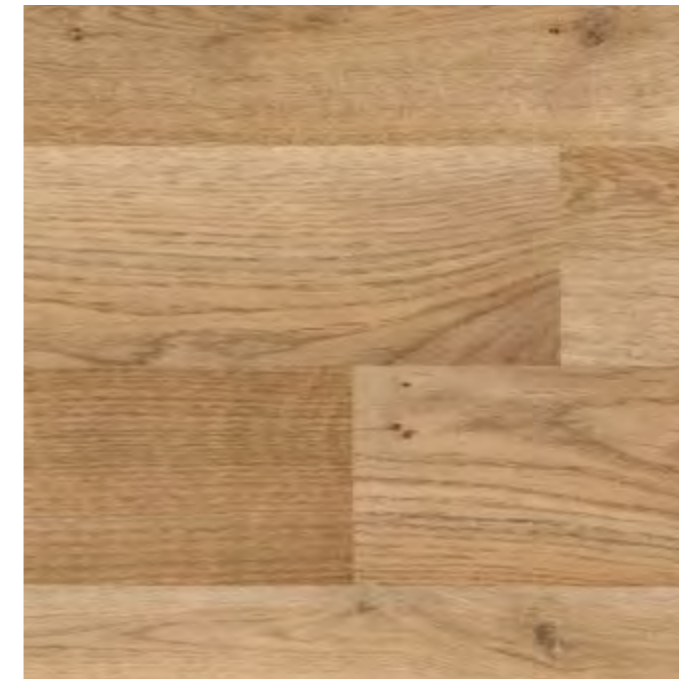

plank w/l: 84 x 332/664mm

WR 3330

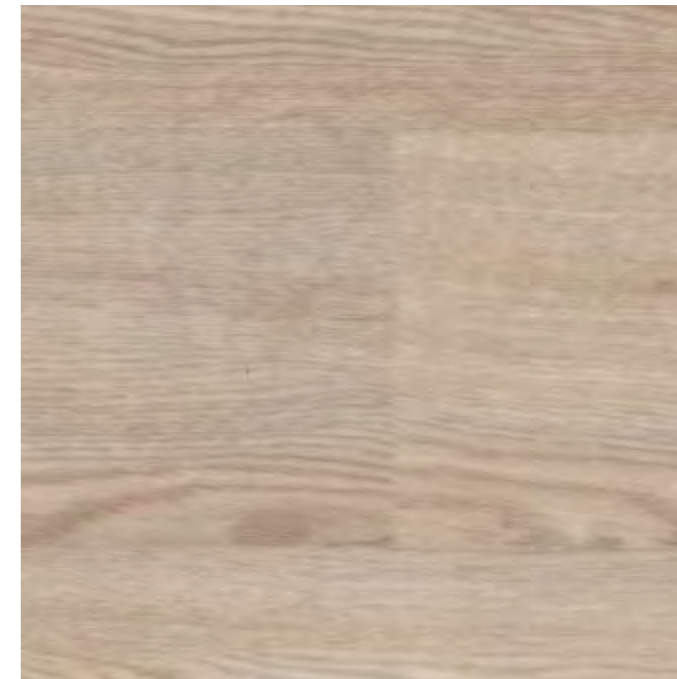

plank w/l: 167 x 1500mm

WR 2990

Rustic Oak 3335

Oiled Oak 3095

WIDE PLANK DESIGN




plank w/l: 100 x 500mm

WR 3290




plank w/l: 100 x 1000mm

WR 3380

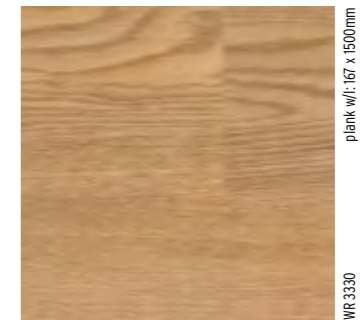

plank w/l: 167 x 1500mm

WR 3330



plank w/l: 167 x 1500mm

WR 3150

Warm Beech 3295

American Oak 3385

Classic Oak 3125

WIDE PLANK DESIGN


Smoked Oak 3155

WIDE PLANK DESIGN



plank w/l: 100 x 1000mm

WR 3340

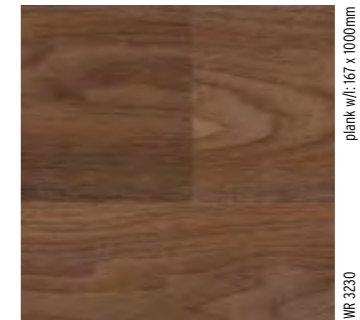

plank w/l: 167 x 1000mm

WR 3230


European Oak 3345

Classic Walnut 3235

WIDE PLANK DESIGN

KEY FEATURES

- Heterogeneous vinyl sheet flooring designed for areas which require impact noise reduction.
- Choice of highly realistic and popular wood designs.
- Polyurethane reinforcement to facilitate a lifelong, low-cost, polish-free maintenance regime.
- Conforms to ASTM F1303.



SPECIFICATIONS



GAUGE: 3.7mm, wear layer 0.65mm
AVAILABILITY: Sheet

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Expona Flow PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING, INCLUDING STYLISH WOOD AND EFFECT DESIGNS




WOOD




Painted Chevron 9828




White Pine 9834




Classic Limed Ash 9833



Sun Bleached Oak 9825




Blond Pine 9839

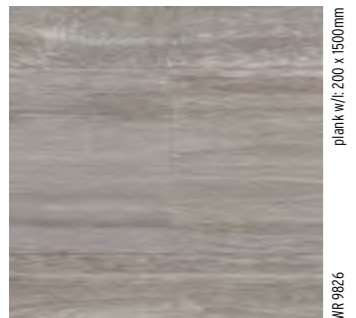


Silver Oak 9826




Grey Weathered Chevron 9829




Roasted Limed Ash 9831




Warm Limed Ash 9832

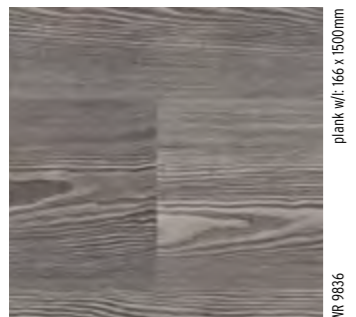


Silvered Pine 9836



Charcoal Pine 9837




Smoked Oak 9827




Aged Oak 9824


INFINITY




Blond Oak 9820




English Oak 9823




Honey Beige 9869




Autumn Rain 9864




Golden Pine 9838




Bronzed Pine 9835




Auburn 9863



Espresso 9867




Honey Oak 9821




Toasted Oak 9822



Firelight 9868



Night Sky 9865



Reclaimed Chevron 9830



Raven 9866


KEY FEATURES

Heterogeneous commercial vinyl sheet floorcovering.

Authentic wood and contemporary effect designs, in a choice of 50 shades.

Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.

Conforms to ASTM F1303.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges.



GAUGE: 2.0mm, wear layer 0.7mm
AVAILABILITY: Sheet

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Flow PUR



HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING, INCLUDING STYLISH WOOD AND EFFECT DESIGNS



COSMOS



CONCRETE

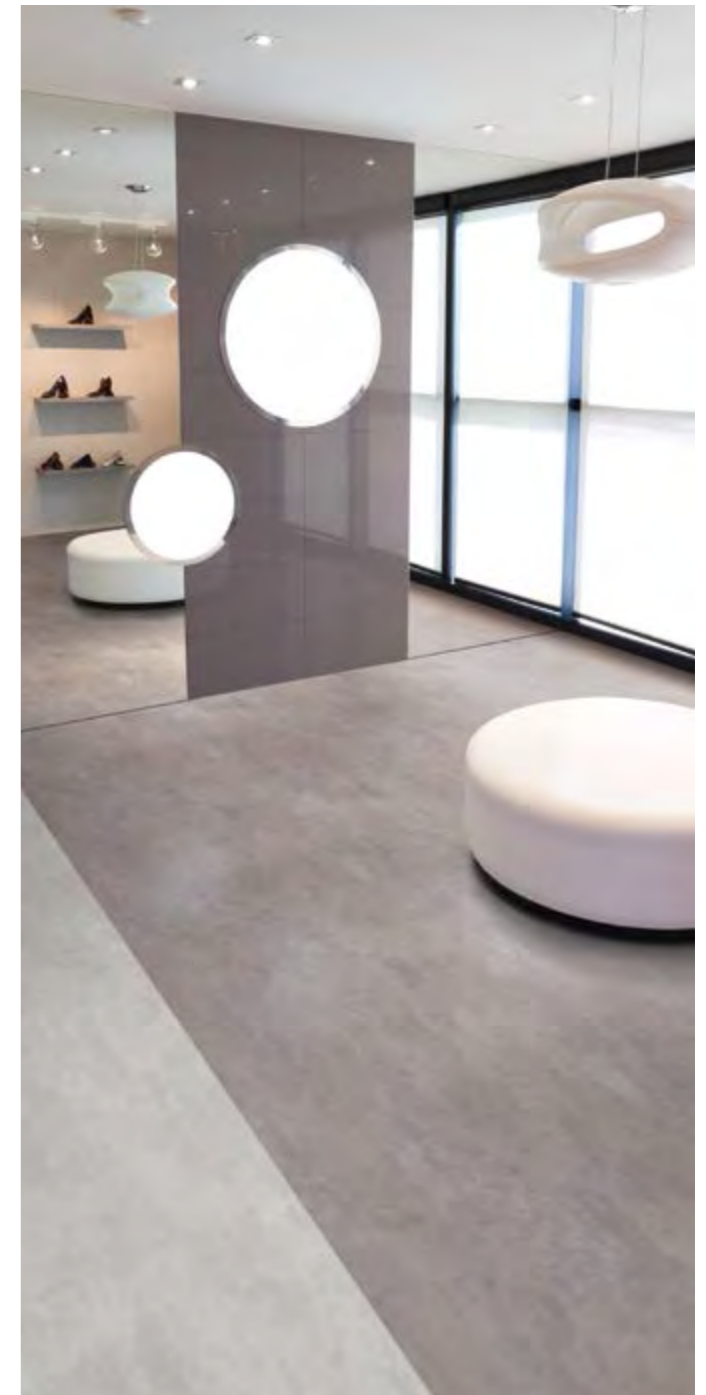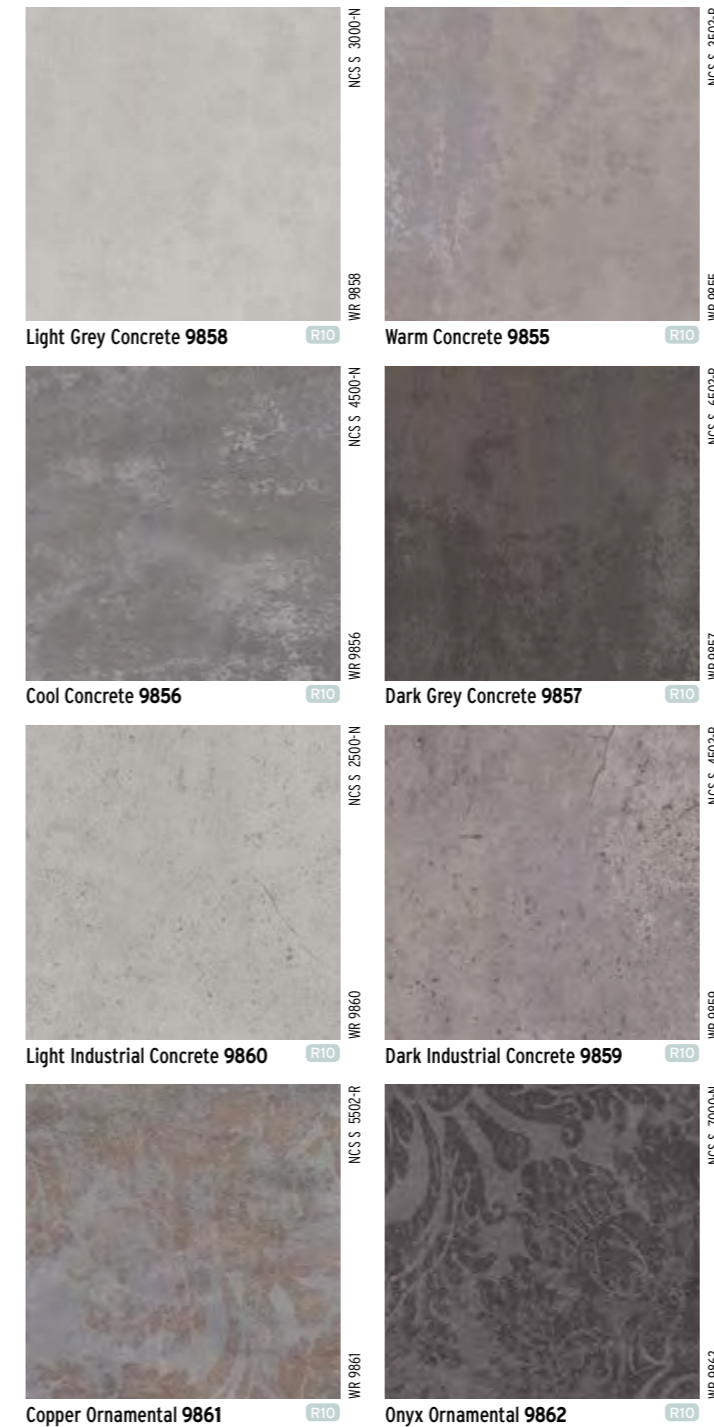

KEY FEATURES

- Heterogeneous commercial vinyl sheet floorcovering.
- Authentic wood and contemporary effect designs, in a choice of 50 shades.
- Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.
- Conforms to EN ASTM F1303.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges.



GAUGE: 2.0mm, wear layer 0.7mm
AVAILABILITY: Sheet

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


NEW Bloc

SOLID COLOUR SHEET VINYL FLOORCOVERING



KEY FEATURES

- Heterogeneous commercial vinyl sheet floorcovering.
- Solid colour sheet flooring in a choice of 16 shades.
- Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.
- Conforms to EN 649 / EN ISO 10582.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm
AVAILABILITY: Sheet: 2m x 20m

NEW Silentflor PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB



WOOD



KEY FEATURES

- Heterogeneous commercial vinyl sheet floorcovering designed for areas which require impact noise reduction.
- All acoustic colours are available 0.65mm (U4) wear layer.
- Authentically reproduced wood and granite designs, and modern abstract patterns.
- Polyurethane reinforcement to facilitate a low-cost, polish-free maintenance regime.
- Conforms to ASTM F1303.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS






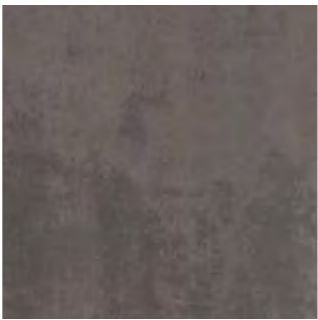

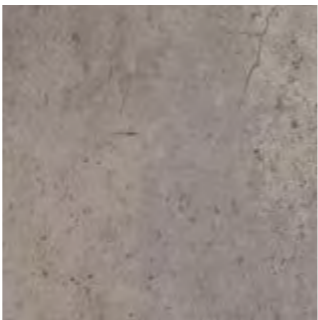
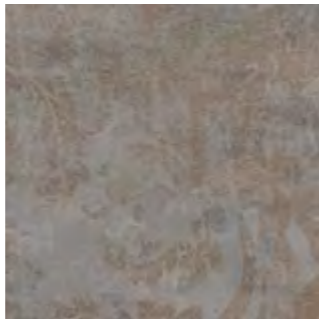

GAUGE: Acoustic 3.7mm, wear layer 0.65mm
AVAILABILITY: Sheet: 2m x 20m

NEW Silentflor PUR









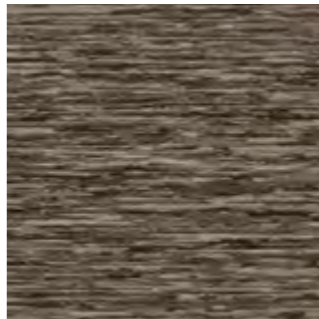


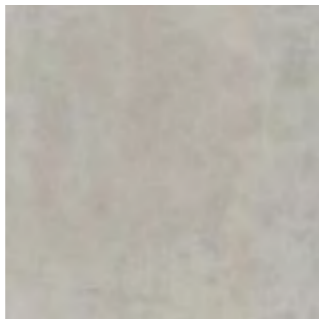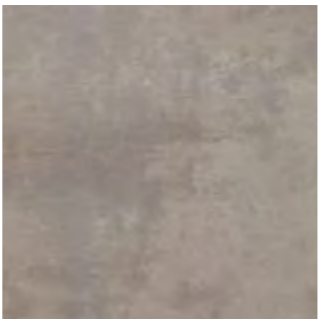
HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB



CONCRETE

 Light Grey Concrete 9965 WR 9858 NCS S 3000-N R10	 Warm Concrete 9967 WR 9855 NCS S 3502-R
 Cool Concrete 9966 WR 9856 NCS S 4500-N R10	 Dark Grey Concrete 9968 WR 9857 NCS S 6502-R R10
 Light Industrial Concrete 9969 WR 9860 NCS S 2500-N R10	 Dark Industrial Concrete 9970 WR 9859 NCS S 4502-R R10
 Copper Ornamental 9971 WR 9861 NCS S 5502-R R10	 Onyx Ornamental 9972 WR 9862 NCS S 7000-N R10

ABSTRACT

 Burnt Orange 9981 WR 9848 NCS S 3040-Y40R R10	 Flaxen 9979 WR 9849 NCS S 0560-Y R10	 Meadow 9980 WR 9850 NCS S 2050-G90Y R10
 Moleskin 9975 WR 9841 NCS S 3005-Y20R R10	 Storm 9973 WR 9845 NCS S 3502-B R10	 Zinc 9982 WR 9804 NCS S 3500-N R10
 Taupe 9976 WR 9843 NCS S 7502-Y R10	 Jet 9974 WR 9842 NCS S 8000-N R10	 Twilight 9984 WR 5086 NCS S 7005-Y20R R10
 Steel Blue 9977 WR 9852 NCS S 6020-B10G R10	 Teal 9978 WR 9851 NCS S 6020-B70G R10	 Onyx 9983 WR 9805 NCS S 7502-R R10

KEY FEATURES

Heterogeneous commercial vinyl sheet floorcovering designed for areas which require impact noise reduction.

All acoustic colours are available with 0.65mm (U4) wear layer.

Authentically reproduced wood and granite designs, and modern abstract patterns.

Polyurethane reinforcement to facilitate a low-cost, polish-free maintenance regime.

Conforms to ASTM F1303.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



GAUGE: Acoustic 3.7mm, wear layer 0.65mm
AVAILABILITY: Sheet: 2m x 20m




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Commercial PUR


ELEGANT WOOD COLLECTION FOR HEAVY COMMERCIAL APPLICATIONS




Beige Weathered Spruce 4074
203 x 1219mm




American Oak 4059
152 x 914mm



Light Classic Oak 4085
152 x 1219mm




Honey Classic Oak 4086
152 x 1219mm




Classic Oak 1902
101 x 914mm




Nut Tree 1907
101 x 914mm




Vintage Timber 4091
101 x 914mm




Light Pine 4061
152 x 1219mm



Honey Ash 4022
152 x 1219mm




Grey Ash 4020
152 x 1219mm



Beige Varnished Wood 4069
152 x 1219mm



Light Varnished Wood 4071
152 x 1219mm



Blue Varnished Wood 4070
152 x 1219mm

KEY FEATURES


Luxury vinyl tile range featuring traditional, rustic and contemporary designs.

Sophisticated and extensive collection with realistic emboss finishes.


Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to ASTM F1700.




* Refer to BRE Global ratings on www.greenbooklive.com




Blond Limed Oak 4081
203 x 1219mm




Grey Limed Oak 4082
203 x 1219mm




Grey Pine 4063
152 x 1219mm




Brown Heritage Cherry 4065
184 x 1219mm




Dark Classic Oak 4088
152 x 1219mm




Brown Weathered Spruce 4072
203 x 1219mm




Red Heritage Cherry 4066
184 x 1219mm




Indian Ebony 1969
101 x 914mm




Blue Weathered Spruce 4073
203 x 1219mm



Brown Limed Oak 4084
203 x 1219mm




Dark Limed Oak 4083
203 x 1219mm




Graphite Pine 4062
152 x 1219mm




Blue Recycled Wood 4068
Mixed sizes



Dark Recycled Wood 4067
Mixed sizes



Weathered Country Plank 4019
152 x 914mm



Aged Elm 4036
152 x 914mm

4067 and 4068 feature mixed plank sizes: 76 x 914, 101 x 914, 152 x 914mm

The **R** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges.

These items feature a bevelled edge.

SPECIFICATIONS



GAUGE: 2.5mm, wear layer 0.55mm
AVAILABILITY: Plank: sizes as shown




This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Expona Commercial PUR


AUTHENTIC STONE AND EFFECTS COLLECTION FOR HEAVY COMMERCIAL APPLICATIONS




Crème Swirl 5048
457 x 457mm




Beige Travertine 5061
305 x 610mm



Classic Yorkstone 1992
457 x 457mm



Light Grey Travertine 5062
305 x 610mm




Exposed Concrete 5028
457 x 457mm




Green Swirl 5047
457 x 457mm




Birch Trunk 4077
305 x 914mm




Dark Grey Travertine 5063
305 x 610mm




Cambrian Stone 1993
457 x 457mm




Grey Plywood 4075
305 x 914mm




Brown Plywood 4076
305 x 914mm




Silver Slate 1921
457 x 457mm




Light Grey Concrete 5067
610 x 610mm




Cool Grey Concrete 5068
610 x 610mm




Warm Grey Concrete 5064
610 x 610mm




Dark Grey Concrete 5069
610 x 610mm



Beige Brazilian Slate 5041
610 x 610mm



White Brazilian Slate 5042
610 x 610mm




Gold Brazilian Slate 5043
610 x 610mm



Taupe Brazilian Slate 5044
610 x 610mm



Crème Matrix 5076
610 x 610mm



Light Grey Matrix 5074
610 x 610mm




Mocca Matrix 5075
610 x 610mm



Black Matrix 5071
610 x 610mm



Nature Texture 5078
610 x 610mm



Black Texture 5077
610 x 610mm

KEY FEATURES

Luxury vinyl tile range featuring traditional, rustic and contemporary designs.

Sophisticated and extensive collection with realistic emboss finishes.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to ASTM F1700.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges.



GAUGE: 2.5mm, wear layer 0.55mm
AVAILABILITY: Tile sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Design PUR

ELEGANT WOOD AND AUTHENTIC STONE AND EFFECTS COLLECTION FOR VERY HEAVY COMMERCIAL APPLICATIONS



KEY FEATURES


Luxury vinyl tile range featuring traditional, rustic and contemporary designs.

Sophisticated and extensive collection with realistic emboss finishes.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to ASTM F1700.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



The **R values** shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges.

These items feature a bevelled edge.

SPECIFICATIONS



GAUGE: 3.0mm, wear layer 0.7mm
AVAILABILITY: Tile: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona SimpLay PUR

LOOSE LAY VINYL FLOOR TILES AND PLANKS



WOOD

	
Blond Country Oak 2507 177.8 x 1219.2mm	American Oak 2503 177.8 x 1219.2mm
	
White Rustic Pine 2513 177.8 x 1219.2mm	Grey Country Oak 2506 203 x 1219mm
	
Grey Ash 2512 177.8 x 1219.2mm	Grey Rustic Oak 2516 177.8 x 1219.2mm
	
Light Grey Finline 2509 177.8 x 1219.2mm	Dark Grey Finline 2510 177.8 x 1219.2mm

			
Medium Classic Oak 2521 185 x 1505mm	Natural Oak 2502 177.8 x 1219.2mm	Natural Rustic Oak 2517 177.8 x 1219.2mm	Natural Ash 2511 177.8 x 1219.2mm
			
Light Classic Oak 2520 185 x 1505mm	Light Cherry 2501 177.8 x 1219.2mm	Golden Rustic Oak 2508 177.8 x 1219.2mm	Rich Oak 2500 177.8 x 1219.2mm
			
Natural Rustic Pine 2514 177.8 x 1219.2mm	Brown Mystique Wood 2519 185 x 1505mm	Brown Rustic Oak 2515 177.8 x 1219.2mm	Rich Walnut 2504 177.8 x 1219.2mm
			
Grey Mystique Wood 2518 185 x 1505mm	Dark Country Oak 2505 177.8 x 1219.2mm		


KEY FEATURES

A collection of heavy commercial loose lay tiles and planks designed to reduce installation time.

Authentic replications of wood, stone and textile effects.


Polyurethane reinforcement provides an excellent foundation for an on going cleaning regime, leading to maintenance cost savings.

Conforms to ASTM F1700.



SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges.

 These items feature a bevelled edge.



GAUGE: 5.0mm, wear layer 0.7mm
AVAILABILITY: Tile: sizes as shown


This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.








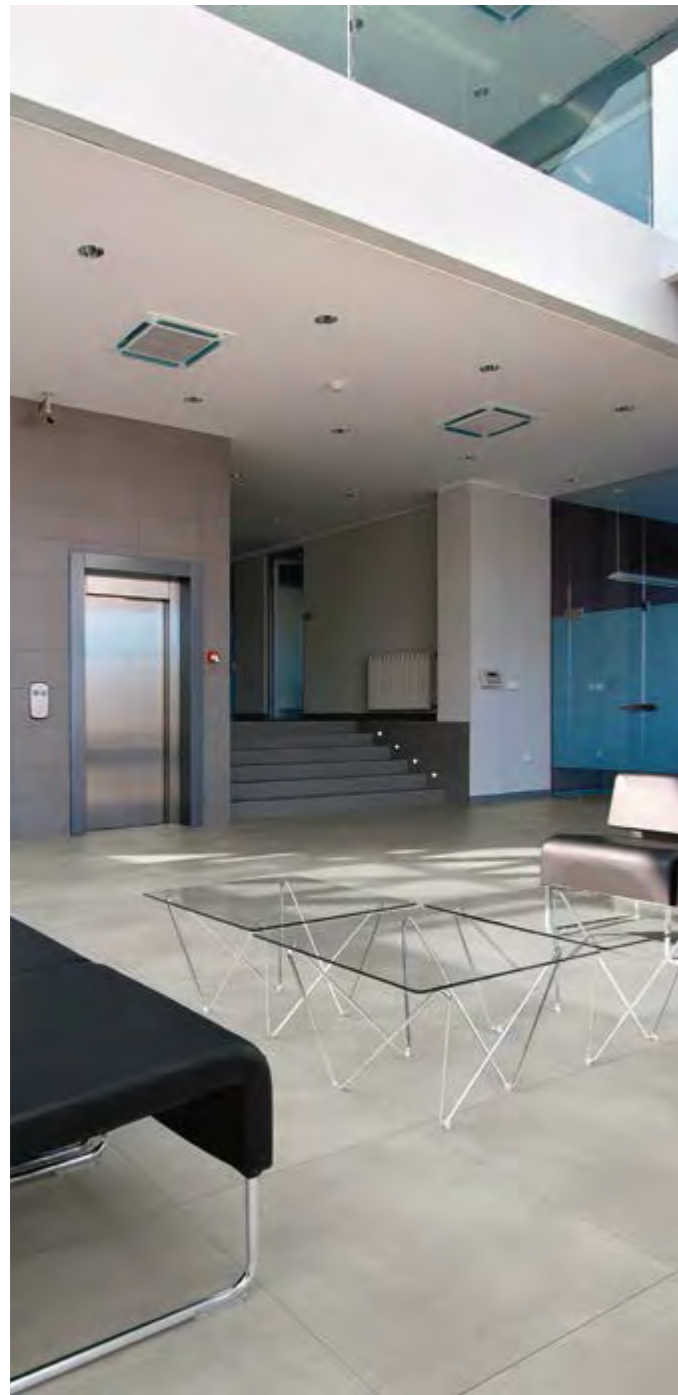


Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona SimpLay PUR

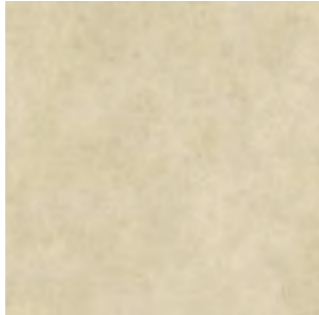LOOSE LAY VINYL FLOOR TILES AND PLANKS








STONE

	
Champagne Limestone 2542 177.8 x 1219.2mm	Limed Concrete 2540 457.2 x 457.2mm
	
Grey Sandstone 2561 457.2 x 457.2mm	Light Grey Concrete 2567 600 x 600mm
	
Warm Grey Concrete 2568 600 x 600	Cold Grey Concrete 2566 600 x 600mm
	
Dark Grey Concrete 2569 600 x 600mm	Black Concrete 2541 457.2 x 457.2mm

KEY FEATURES





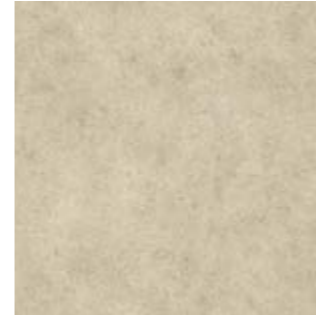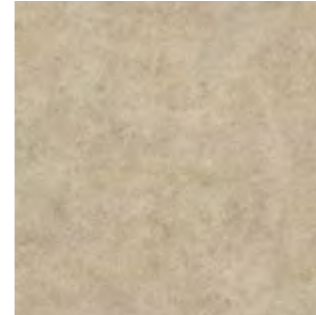A collection of heavy commercial loose lay tiles and planks designed to reduce installation time. Authentic replications of wood, stone and textile effects. Polyurethane reinforcement provides an excellent foundation for an on going cleaning regime, leading to maintenance cost savings. Conforms to ASTM F1700.




Jerusalem Limestone 2543 457.2 x 457.2mm

Cathedral Limestone 2544 457.2 x 457.2mm

Ground Limestone 2545 457.2 x 457.2mm

Slate 2560 457.2 x 457.2mm




EFFECT


Porcelain weave 2511 457.2 x 457.2mm

Rich Oak 2500 457.2 x 457.2mm

Brown Leather 2564 457.2 x 457.2mm

Dark Grey Leather 2565 457.2 x 457.2mm

SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges.

 These items feature a bevelled edge.



GAUGE: 5.0mm, wear layer 0.7mm
AVAILABILITY: Tile: sizes as shown


This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Control PUR

LUXURY VINYL TILES WITH SUSTAINABLE WET SLIP RESISTANCE




American Oak 6500
152 x 914mm




White Oak 6505
152 x 914mm




Blond Country Plank 6501
152 x 914mm




Light Elm 6506
152 x 914mm




Nut Tree 6502
152 x 914mm




Weathered Country Plank 6504
152 x 914mm




Classic Oak 6503
152 x 914mm




Portland Stone 7500
457 x 457mm




Classic Yorkstone 7502
457 x 457mm




Classic Limestone 7501
457 x 457mm




Cambrian Stone 7507
305 x 610mm



Smoked Limestone 7503
457 x 457mm



Warm Grey Concrete 7504
457 x 457mm



Roman Limestone 7506
305 x 610mm

KEY FEATURES

The first EN 13845 sustainable slip resistant LVT in the World.

Featuring a polyurethane reinforcement to assist ongoing maintenance, offering cost saving of up to 60%.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to ASTM F1700.



† Refer to BRE Global ratings on www.thegreenguide.org.uk

SPECIFICATIONS



GAUGE: 2.5mm, wear layer 0.7mm

AVAILABILITY: Tile & Plank: sizes as shown




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Affinity 2⁵⁵


A COLLECTION OF HIGH-DESIGN WOOD EFFECT PLANKS FOR HEAVY COMMERCIAL APPLICATIONS




Aspen Pine 9870




Cracked White Oak 9871




Planed White Oak 9872




French Limed Oak 9873




Champagne Oak 9874




Dappled Oak 9875




Harvest Oak 9876




Saw Mill Oak 9877



Cross Sawn Timber 9878




Hazel Oak 9879




Smoked Walnut 9880




Flamed Chestnut 9881

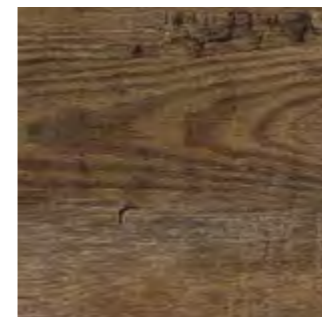


Huckleberry Oak 9882



Reclaimed Pine 9883



Seasoned Grey Oak 9884



Jet Black Ash 9885

KEY FEATURES

- Luxury Vinyl plank flooring, featuring authentically replicated wood designs.
- Accurate timber variation with grain and knots represented in each wood design.
- Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Innovative 2mm gauge, that can be installed alongside 2mm vinyl sheet flooring.
- Indoor Air Comfort Gold - Eurofins certified product.
- Conforms to EN 649 / EN ISO 10582.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.



GAUGE: 2.0mm, wear layer 0.55mm
AVAILABILITY: Plank: 184.2 x 1219.2mm



Affinity, Affinity2⁵⁵ and 255 are trademarked by Polyflor.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

NEW Camaro PUR

A COLLECTION OF HIGH-DESIGN WOOD EFFECT PLANKS AND REALISTIC STONE, SLATE AND MARBLE DESIGNS TILES FOR LIGHT COMMERCIAL AND RESIDENTIAL APPLICATIONS




WOOD

Cambridge Parquet 2251 76.2 x 228.6mm	Cashmere Oak 2244 184.2 x 1219.2mm	Natural Oak 2232 152.4 x 1219.2mm	Boathouse Oak 2242 184.2 x 1219.2mm
Georgian Parquet 2252 76.2 x 228.6mm	Sienna Oak 2248 184.2 x 1219.2mm	Vintage Timber 2220 152.4 x 914.4mm	Smoke Brushed Elm 2233 152.4 x 914.4mm
American Oak 2217 101.6 x 914.4mm	Nut Tree 2202 101.6 x 914.4mm	Wild Amber Oak 2249 184.2 x 1219.2mm	Heritage Oak 2239 203.2 x 1219.2mm
Salvaged Timber 2247 76.2 / 101.6 / 152.4 x 914.4mm	Quayside Oak 2246 184.2 x 1219.2mm	North American Walnut 2236 152.4 x 914.4mm	Midnight Ash 2243 203.2 x 1219.2mm

KEY FEATURES

- Luxury vinyl plank and tile collection featuring creative and authentic wood and stone designs.
- Accurate timber variation, grain and knots are sympathetically represented.
- Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Indoor Air Comfort GOLD - Eurofins certified product.
- Conforms to ASTM F1700.



* Refer to BRE Global ratings on www.greenbooklive.com

STONE

Bianco Oak 2241 184.2 x 1219.2mm	White Metalstone 2332 304.8 x 609.6mm	Portico Limestone 2334 304.8 x 609.6mm	Burnished Concrete 2342 304.8 x 609.6mm
White Limed Oak 2229 152.4 x 914.4mm	Arctic Slate 2341 304.8 x 609.6mm	Classic Yorkstone 2336 304.8 x 304.8mm	Organic Concrete 2343 304.8 x 609.6mm
Glacier Slate 2345 152.4 x 609.6mm	Romano Stone 2301 304.8 x 304.8mm	Smoked Concrete 2344 304.8 x 609.6mm	
Highland Slate 2346 152.4 x 609.6mm	Ocean Slate 2319 304.8 x 609.6mm	Atlantic Slate 2339 304.8 x 304.8mm	

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Expona Control PUR or Polysafe ranges.

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.3mm
AVAILABILITY: Tile & Plank: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



Colonia PUR

COLLECTION OF AUTHENTIC WOOD AND STONE DESIGNS FOR RESIDENTIAL APPLICATIONS



WOOD

STONE

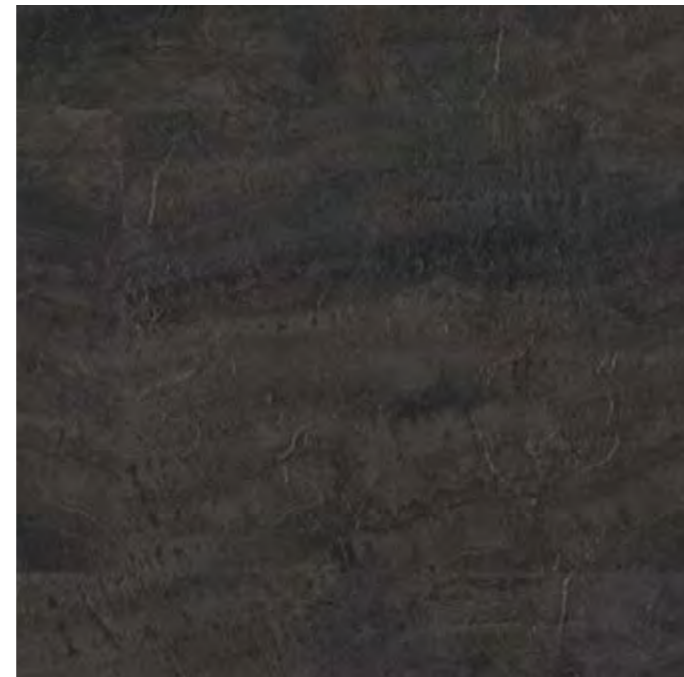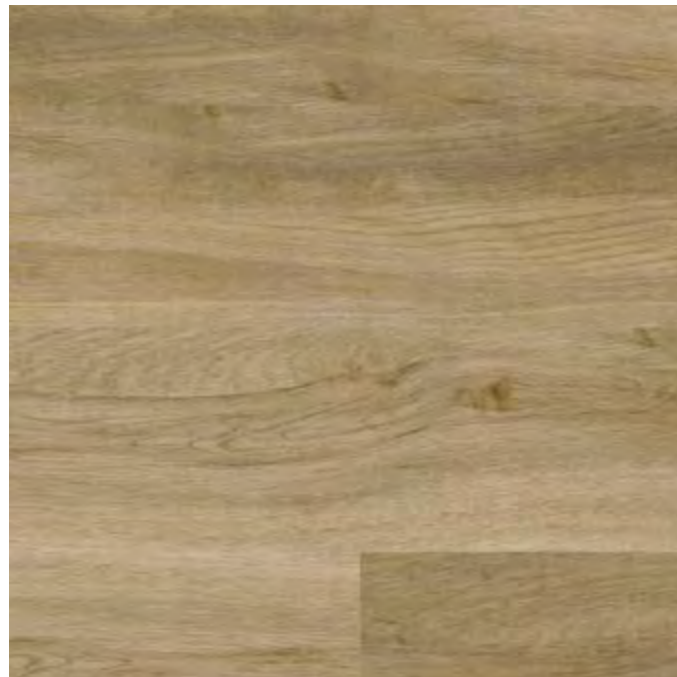

English Oak 4435
152 x 1219mm

Welsh Raven Slate 4535
305 x 610mm



Nordic White Oak 4436
184 x 1219mm



New England Elm 4433
152 x 1219mm



Schoolhouse Oak 4434
152 x 1219mm




Natural Limestone 4536
457 x 457mm




Fossil Limestone 4537
457 x 457mm



Cottage Yorkstone 4531
305 x 305mm



Oxford Maple 4431
152 x 914mm




Golden Koa 4403
101 x 914mm



Mountain Alder 4401
101 x 914mm



Balmoral Grey Slate 4534
305 x 610mm




Glazed Metalstone 4533
305 x 610mm




Quarried Millstone 4532
305 x 305mm



Woodland Oak 4411
101 x 914mm



Virginia Walnut 4432
152 x 914mm



Kings Oak 4437
184 x 1219mm



Imperial Black Marble 4515
305 x 305mm

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.2mm
AVAILABILITY: Tile & Plank: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on certain designs, natural variations in texture and colour, as well as markings such as knots, may be present.



* Refer to BRE Global ratings on www.greenbooklive.com




SD Collection

HARDWEARING VINYL FLOORCOVERINGS ENGINEERED FOR ELECTROSTATIC DISCHARGE PROTECTION




Polyflor SD


Finesse SD



Ocean Blue 5050




Golden Sand 5070




Cascade 5800



Lodestone 5830




Flaxen 5060



Teal 5080




Woodglade 5840



Moonscape 5860



Steel Grey 5030



Silver Grey 5110




Daybreak 5820



KEY FEATURES

- High-performance, homogeneous floorcoverings with static dissipative properties.
- Choice of marbled or non-directional decoration.
- Conforms to a broad range of ESD standards.
- Conforms to ASTM F1913 and F1700.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet
Tile: 608 X 608mm




EC Collection


HARDWEARING VINYL FLOORCOVERINGS ENGINEERED FOR ELECTROSTATIC DISCHARGE PROTECTION




OHmega EC

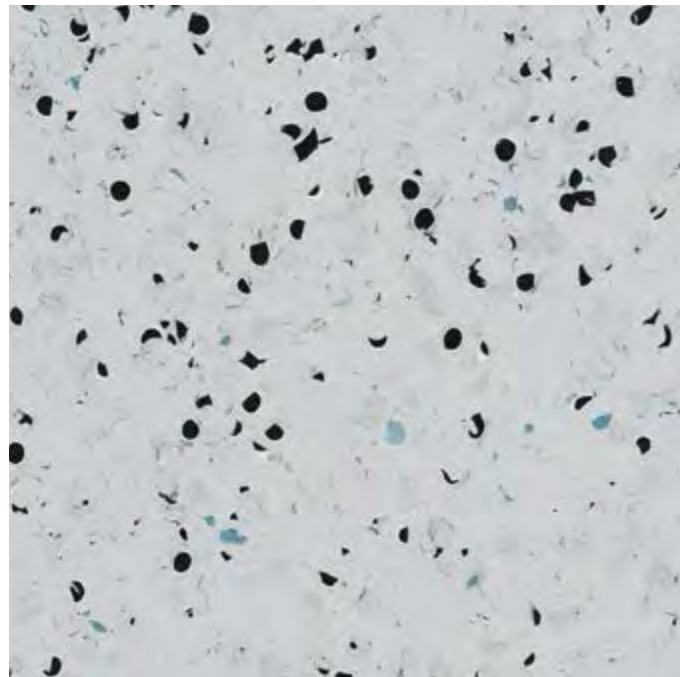


Morning Dew 6006



Thunderstorm 6002



Warm Haze 6003




Tempest 6004



Frosty Glen 6005

Polyflor EC



Black/Grey 8990

Conductive ROF*



Black 5980


KEY FEATURES

High-performance, homogeneous floorcoverings with electrostatic conductive properties.

Conforms to a broad range of ESD standards.

Conforms to ASTM F1700.

* ROF option is intended for explosive handling areas. It does not offer protection from a short circuit on a 240/250 volt mains, so installation and switching in these rooms are critical and must be considered, prior to any handover.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet
Tile: 608 x 608mm

* ROF - Available in sheet only


Polyclad Pro

TOUGH, DURABLE AND FLEXIBLE VINYL WALL AND CEILING CLADDING FEATURING THE PROTECTION OF A POLYURETHANE SURFACE TREATMENT

Polyclad Pro PU



White Chalk 4093



Biscuit Beige 4092



Grey Steel 4095



Frosted Grey 4094



Blue Shingle 4097



Dusted Blue 4096

Polyclad Plus PU



Summer Sky 2830




Frosted Cream 2800




Polar Ice 2840



Spring Fern 2810



Nimbus Grey 2710



Dove White 2700

* For a floor to wall solution, consider the combination of Polyclad Pro with complementary Polysafe Hydro Evolve colours. See page 23.


KEY FEATURES

Wall and ceiling cladding sheet featuring a subtle marbled decoration.

Polyurethane surface treatment provides benefits in terms of hygiene and ease of maintenance.

Designed to be welded to Polyflor floorcoverings, to provide a floor-to-wall surface that provides an excellent barrier to dirt and infection.

Ideal for wet and hygiene-critical areas



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS

GAUGE: Polyclad Pro PU 1.25mm
 Polyclad Plus PU 2.0mm



AVAILABILITY: Sheet



Polyflor Sport

HARDWEARING VINYL SPORTSFLOOR DESIGNED FOR USE IN 'MULTI-PURPOSE' INDOOR SPORTS ARENAS

QUICK SHIP SAME OR
NEXT DAY SHIPPING
T: 1 905 364 3000

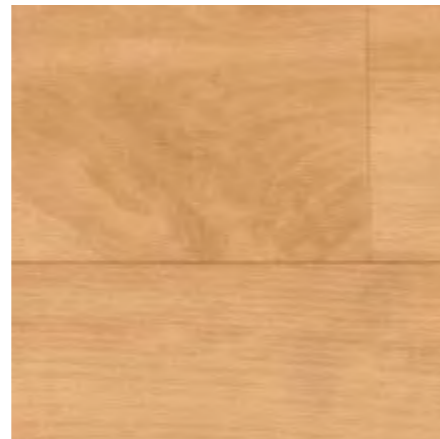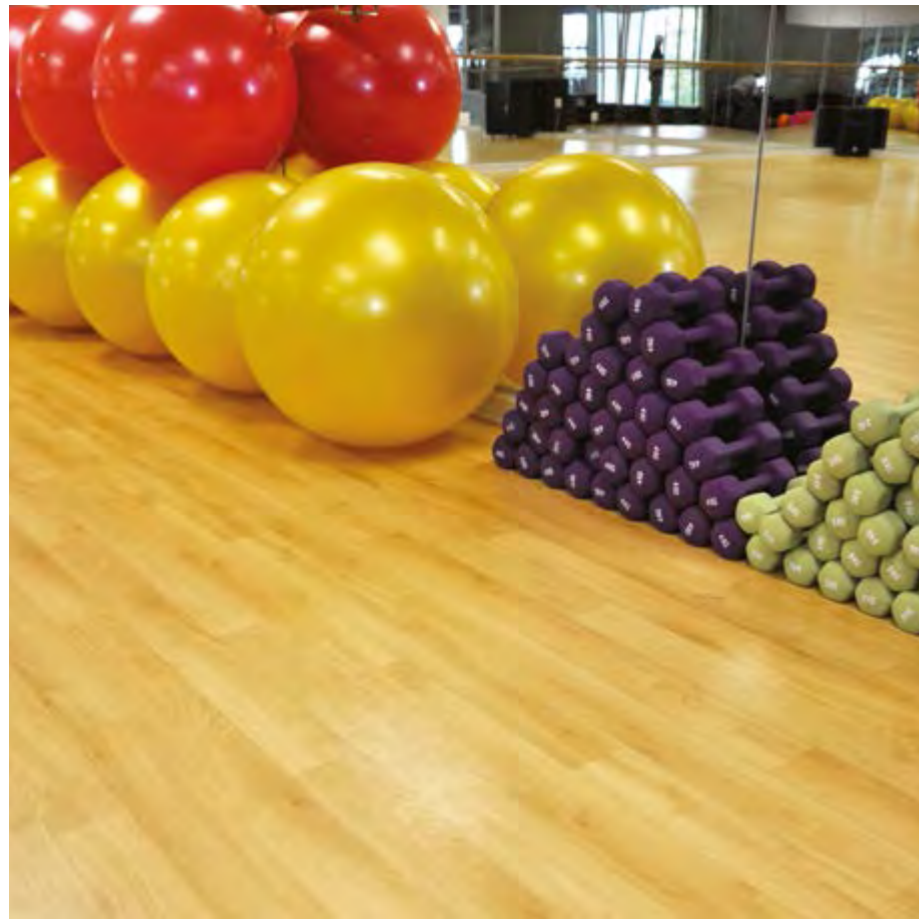

Maple 7516




Green 7515



Blue 7512

LINE MARKINGS (width and colours)

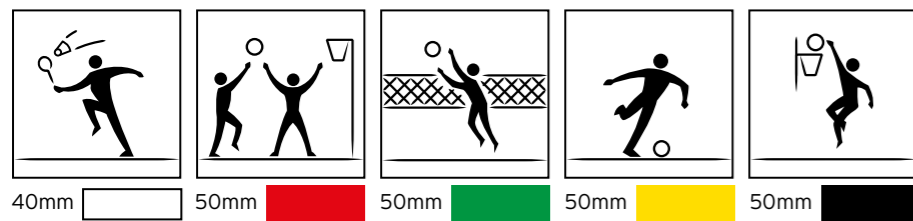

KEY FEATURES

High performance vinyl sheet sports flooring conforming to EN 14904.

Designed to perform safely and effectively in 'multi-purpose' indoor sports venues.

Suitable for basketball, netball, volleyball, gymnastics, badminton, handball, indoor football, martial arts and others.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS


GAUGE: 6.7mm

Quick Ship Maple only


AVAILABILITY: Sheet: 2m x 18.5m

Diamant


COMMERCIAL RUBBER SHEET FLOORING




Almond 206




Cotton 313




Sea Salt 213




Lentil 408




Pepper 306




Rice 203




Blue Poppy 702




Water Melon 413




Raisin 307



Mocha 205




Water Lily 707




Apricot 607




Mustard 503



Molasses 210



Blue Vervain 713



Tomato 611

KEY FEATURES

Hardwearing rubber sheet floorcovering designed for heavy traffic commercial areas.

Multi-coloured chip decoration with embossed surface finish.

Inherent sound deadening properties and cigarette burn resistance.

Conforms to EN 1817: 1998.



† Refer to BRE Global ratings on www.thegreenguide.org.uk

SPECIFICATIONS




GAUGE: 2.0mm

AVAILABILITY: Sheet



Noppe Stud Tile

COMMERCIAL RUBBER STUD TILE

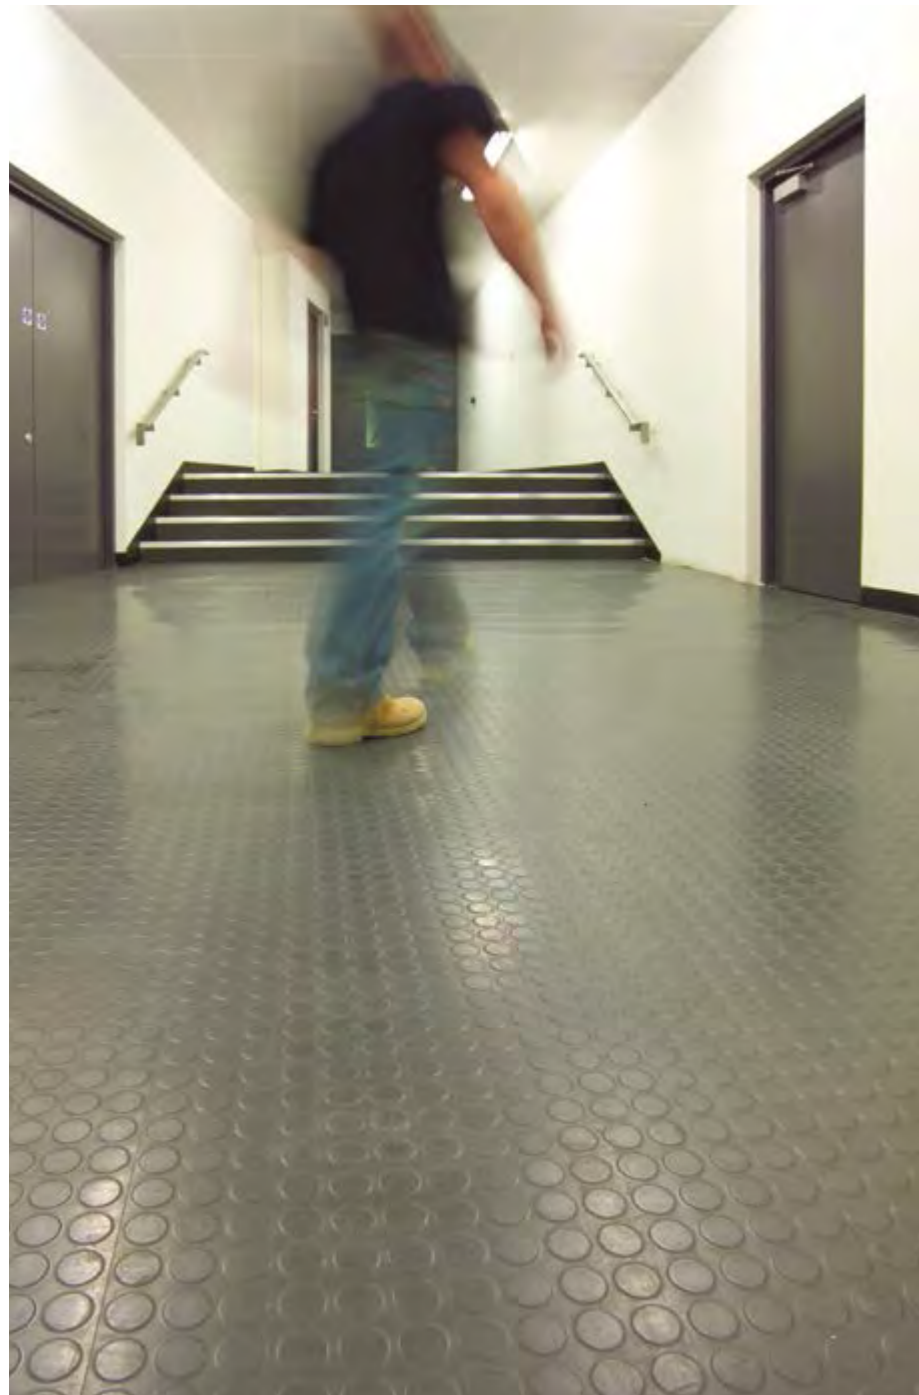

Group 1



Steel 014*

NCS S 5502-G



Limestone Green 013*

NCS S 5010-B70G



Green Baize 015

NCS S 6030-G10Y




Deep Blue 191*

NCS S 7020-B



Anthracite 102*

NCS S 8000-N



Black Coal 101*

NCS S 8502-R

Group 2



Sandstone 140

NCS S 3020-Y20R



Orange 010

NCS S 2070-Y50R



Warm Red 012

NCS S 2070-Y90R



Mercury 129

NCS S 3005-B80G



Cool Blue 707*

NCS S 5020-B




Cobalt 019

NCS S 7020-B80B

KEY FEATURES

- Hard wearing commercial rubber floor tile.
- Low-profile studded surface.
- Conforms to EN 12199: 1998.
- Resistant to cigarette burns.

SPECIFICATIONS



GAUGE: 3.0mm, 4.0mm
 AVAILABILITY: Tile: 500 x 500mm

All shades are available in 3.0mm. *Also available in 4.0mm



† Refer to BRE Global ratings on www.thegreenguide.org.uk


Ejecta

ACCESSORIES DESIGNED FOR USE WITH POLYFLOR VINYL FLOORCOVERINGS



PRODUCT	CODE	GAUGE/SIZE	UNIT LENGTH	STANDARD PACK	EX-STOCK COLOURS
SIT-ON COVING	MC8	20 x 100 mm	2.187 yds	20 x 2.187 yds	15 colours
	MC14	20 x 75 mm	2.187 yds	20 x 2.187 yds	15 colours
SET-IN COVING	MC18	50 x 100 mm	2.187 yds	20 x 2.187 yds	15 colours
	MC8c SIT-ON	20 x 100 mm	21.872 yds	2 x 2.187 yds coil*	15 colours IN STOCK
COILED SKIRTING	MC18c SET-IN	50 x 100 mm	21.872 yds	2 x 2.187 yds coil*	15 colours
	CF 20mm	20 x 20 mm	2.187 yds	30 x 2.187 yds	Black only IN STOCK
COVE FORMER	CF 38mm	38 x 38 mm	2.187 yds	15 x 2.187 yds	Black only
	CS-N	40 mm	2.187 yds	40 x 2 m	15 colours
CAPPING STRIP	CS-NC	40 mm	2.187 yds coil	21.872 yds coil*	15 colours
	CS	20 mm	21.872 yds coil	21.872 yds coil*	Black only IN STOCK
	CT	41 mm	2.187 yds	50 x 2.187 yds	White only
	EFA 75	75 x 75 mm	2.187 yds	10 x 2.187 yds	Black only
CORNER CAP	EFA 75	75 x 75 mm	2.187 yds	10 x 2.187 yds	Black only
WELDING ROD	Colours to match vinyl sheet flooring		109.361 yds coil	109.361 yds coil*	

CF20, MC8c and CS are the only stocked items. Special colours subject to a minimum order of 500 linear metres (excludes CS, CT, EFA 75, CF) *Supplied in standard packs only

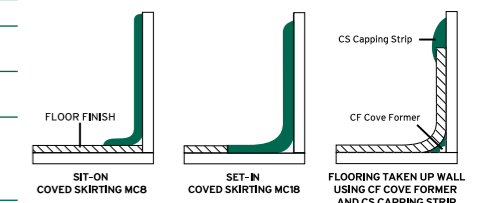

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Product Specification

	PEARLAZZO PUR	PRESTIGE PUR	CLASSIC MYSTIQUE PUR	2000 PUR
Gauge	2mm	2mm	2mm	2mm, 2.5mm
Wear Layer	2mm	2mm	2mm	2mm
Roll Size	2.187 x 21.872yd = 47.84 yd ²	2.187 x 21.872yd = 47.84 yd ²	2.187 x 21.872yd = 47.84 yd ²	2.187 x 21.872yd = 47.84 yd ² 2.187m x 16.404yd = 35.88yd ²
Tile Size	-	11.81" x 11.81" 23.937" x 23.937"	11.81" x 11.81" 23.937" x 23.937"	11.81" x 11.81" 23.937" x 23.937"
Weight	2950g/m ²	2950g/m ²	3250g/m ²	2mm: 3550g/m ² 2.5mm: 4552g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms	-
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓
ASTM F1913	Conforms	Conforms	Conforms	-
ASTM F1700	-	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
CAN ULC 102.2S	Pass	Pass	Pass	Pass
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass
ASTM E662	<450	<450	<450	<450
ASTM E648	Class 1	Class 1	Class 1	Class 1*
EN 660-2 Abrasion Group	Group T	Group T	Group P	Group M
EN ISO 10581	Type I	Type I	Type I	Type II
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
ASTM D2047	> 0.5	> 0.5	> 0.5	> 0.5
ASTM F970 (MOD)	750psi	750psi	750psi	750psi
ASTM F1515	Pass	Pass	Pass	Pass
ASTM F925	Meets	Meets	Meets	Meets
Indoor Air Comfort Gold	Approved	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass
BRE Green Guide	A+ rating	A+ rating	A+ rating	A+ rating
Hygiene	+	+	+	+
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

* Tile size available in selected gauges - see tile availability table for more details.

+ Certification available for 2mm only.

• All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Tile availability and coverage	Tile size	Coverage	Tiles per box
Prestige PUR, Mystique PUR, Classic Mystique PUR, 2000 PUR 2mm, XL PU 2mm, Standard XL 2mm, Polyflor SD, Finesse SD, Polyflor EC, Finesse EC	23.937" x 23.937"	55.649 ft ²	14
Prestige PUR, Mystique PUR, Classic Mystique PUR, 2000 PUR 2mm, XL PU 2mm, Standard XL 2mm, Polyflex Plus PU 1.5/2.0mm	11.81" x 11.81"	48.437 ft ²	50
2000 PUR 2.5mm, Polyflex Plus PU 2.5mm	11.81" x 11.82"	38.749 ft ²	40
Noppe Stud Tile 3mm	19.68" x 19.68"	53.819 ft ²	20
Noppe Stud Tile 4mm	19.68" x 19.68"	43.055 ft ²	16

Product Specification

	XL PU	STANDARD XL	POLYFLEX PLUS
Gauge	1.5mm, 2mm	1.5mm, 2mm 2.5mm, 3mm	1.5mm, 2mm, 2.5mm
Roll Size	2.187 x 30.094 yd =65.77 yd ² 2.187 x 21.872 yd = 47.84 yd ²	2.187 x 30.094 yd =65.77 yd ² 2.187 x 21.872 yd = 47.84 yd ²	-
Tile Size	11.81" x 11.81" 23.937" x 23.937"	11.81" x 11.81" 23.937" x 23.937"	11.81" x 11.81"
Weight	1.5mm: 2360g/m ² 2mm: 3200g/m ²	1.5mm: 2360g/m ² 2mm: 3200g/m ² 2.5mm: 4200g/m ² 3mm: 5010g/m ²	1.5mm: 2800g/m ² 2mm: 3800g/m ² 2.5mm: 4860g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms*
Use Area Classification	1.5mm: 23, 32, 41 2mm: 23, 34, 43	1.5mm: 23, 32, 41 2mm: 23, 34, 43 2.5mm: 23, 34, 43 3mm: 23, 34, 43	1.5mm: 23, 31 2mm: 23, 33, 42 2.5mm: 23, 34, 43
Agrément	1.5mm: ✓ 2mm: ✓	1.5mm: ✓ 2mm: ✓ 2.5mm: ✓ 3mm: ✓	-
ASTM F1700	Conforms	Conforms	-
EN 13501-1	Class Bfl-S1	Class Bfl-S1	-
CAN ULC 102.2S	Pass	Pass	Pass
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass
ASTM E662	<450	<450†	-
ASTM E648	Class 1	Class 1†	Class 1
EN 660-2 Abrasion Group	Group M	Group M	Group F
EN ISO 10581	Type II	Type II	Type III
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)
ASTM D2047	> 0.5	-	-
ASTM F970 (MOD)	750psi	-	-
ASTM F1515	Pass	Pass	Pass
ASTM F925	Meets	Meets	Meets
Indoor Air Comfort Gold	Approved	Approved	-
FloorScore	Certified product	Certified product	-
AgBB	Pass	Pass	-
BRE Green Guide	A+ rating	A+ rating	A+ Generic
Hygiene	+	+	-
Maintenance	Polyurethane surface treatment	-	Polyurethane surface treatment

† Certification available for 1.5mm and 2mm only.

* Tile size available in selected gauges - see tile availability table for more details.

• 40mm mandrel.

• All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

POLYSAFE	VERONA PUR	MOSAIC PUR	MODENA PUR	ARENA PUR	WOOD FX PUR	VOGUE ULTRA PUR
Gauge	2mm	2mm	2mm	2mm	2mm	2mm
Wear Layer	-	0.7mm	0.7mm	0.7mm	0.7mm	-
Roll Size	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²
Weight	2600g/m ²	2400g/m ²	2780g/m ²	2780g/m ²	2780g/m ²	2400g/m ²
EN 13845	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms
CE Marking	DA0063	DA0035	DA0053	DA0053	DA0053	DA0005
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	✓	✓
ASTM F1303	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
CAN ULC 102.2S	Pass	Pass	Pass	Pass	Pass	Pass
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
EN 13845 Abrasion Resistance	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles
RRL Pendulum Test	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•
Surface Roughness Rz	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm
ASTM F970 (MOD)	750psi	750psi	750psi	750psi	750psi	750psi
ASTM D2047 (wet and dry)	>0.5	>0.5	>0.5	>0.5	>0.5	>0.5
AS/NZS 4586 / DIN 51130	R10	R10	R10	R10	R10	R10
ASTM F1515	Pass	Pass	Pass	Pass	Pass	Pass
ASTM F925	Meets	Meets	Meets	Meets	Meets	Meets
Indoor Air Comfort Gold	-	-	Approved	Approved	Approved	-
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+ Generic	A+	A+ Generic	A+ Generic	A+	A+
Hygiene	+	+	+	+	+	+
Maintenance Enhancement	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR

• 4S Rubber/Slider 96. ▲ TRL/Slider 55.

✚ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

POLYSAFE	STANDARD PUR	HYDRO	HYDRO EVOLVE	WOOD FX ACOUSTIX PUR	APEX
Gauge	2mm, 2.5mm, 3.5mm	2mm	2mm	3.7mm	2.5mm
Wear Layer	-	-	-	0.65mm	-
Roll Size	2.187 x 21.872 yd = 47.84 yd ² 2.187 x 16.404 yd = 35.88 yd ^{2*}	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²
Weight	2mm: 2430g/m ² 2.5mm: 3100g/m ² 3.5mm: 4400g/m ²	2800g/m ²	2850g/m ²	2670g/m ²	3150g/m ²
EN 13845	Conforms	Conforms	Conforms	-	Conforms
EN 651	-	-	-	Conforms	-
CE Marking	DA0003	DA0006	DA0052	DA0054	DA0064
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 42	23, 34, 43
Agrément	✓	✓	✓	✓	✓
ASTM F1303	Conforms	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
CAN ULC 102.2S	Pass	Pass	Pass	Pass	Pass
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1
EN 13845 Abrasion Resistance	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles
EN ISO 10140-3 (EN ISO 140-8)	-	-	-	≥19dB	-
RRL Pendulum Test	≥36 (wet test)•	≥36 (wet test)▲•	≥36 (wet test)▲•	≥36 (wet test)•	≥45 (wet test)•
Surface Roughness Rz	≥20µm	≥20µm	≥20µm	≥20µm	≥70µm
ASTM F970 (MOD)	750psi	750psi	750psi	750psi	750psi
ASTM D2047 (wet and dry)	>0.5	>0.5	>0.5	>0.5	>0.5
AS/NZS 4586 / DIN 51130	R10	Class B	Class B	R10	R12
ASTM F1515	Pass	Pass	Pass	Pass	Pass
ASTM F925	Meets	Meets	Meets	Meets	Meets
Indoor Air Comfort Gold	-	-	-	Approved	-
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+	A+	A+ Generic	A+	A+ Generic
Hygiene	+	+	+	+	+
Maintenance Enhancement	Polysafe™ PUR	-	-	Polysafe™ PUR	-

* 3.5mm gauge.

• 4S Rubber/Slider 96. ▲ TRL/Slider 55.

✚ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

	FOREST FX PUR	EXPONA FLOW PUR	BLOC PUR
Gauge	2mm	2mm	2mm
Wear Layer	0.7mm	0.7mm	0.7mm
Roll Size	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²
Weight	2700g/m ²	2700g/m ²	2660g/m ²
EN 649 / EN ISO 10582	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43
ASTM F1303	Conforms	Conforms	-
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
CAN ULC 102.2S	Pass	Pass	-
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass
EN 649 / EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I
EN 433 Residual Indentation	<0.1mm	<0.1mm	<0.1mm
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)
DIN 51130	R10	R10	R10
AS/NZS 4586	R10	R10	R10
ASTM E648	Class 1	Class 1	Class 1
ASTM D2047	>0.5	>0.5	-
ASTM F1515	Pass	Pass	-
ASTM F925	Meets	Meets	Meets
ASTM F970 (MOD)	750psi	750psi	750psi
Indoor Air Comfort Gold	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product
AgBB	Very low emissions	Very low emissions	Very low emissions
Hygiene	+	+	+
BRE Green Guide	A+	A+	A+
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement



	ACOUSTIX FOREST FX PUR	SILENTFLOR PUR
Gauge	3.7mm	3.7mm
Wear Layer	0.65mm	0.65mm
Roll Size	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²
Weight	2800g/m ²	2550g/m ²
EN 651	Conforms	Conforms
Use Area Classification	23, 34, 42	23, 34, 42
ASTM F1303	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	-
ASTM E648	Class 1	Class 1
EN ISO 11925-2	Pass	-
EN 649 / EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I
EN ISO 10140-3 (EN ISO 140-8)	≥19dB	≥19dB
EN 433 Residual Indentation	<0.2m	<0.2mm
EN 13893	Class DS (dry)	Class DS (dry)
ASTM D2047	>0.5	-
ASTM F1515	Pass	-
ASTM F925	Meets	-
DIN 51130	R10	R10
Indoor Air Comfort Gold	Approved	Approved
FloorScore	Certified product	Certified product
AgBB	Very low emissions	Very low emissions
Hygiene	+	+
BRE Green Guide	A+	A+
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement



+

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

Product Specification

	EXPONA DESIGN PUR	EXPONA COMMERCIAL PUR	EXPONA CONTROL PUR
Gauge	3mm	2.5mm	2.5mm
Wear Layer	0.7mm	0.55mm	0.7mm
Plank Size: Wood (planks per box)	6" x 36" (24) 6" x 48" (18) 7.244" x 48" (15) 8" x 48" (14)	4" x 36" (36) 6" x 36" (24) 6" x 48" (18) 7.244" x 48" (15) 8" x 48" (14)	152 x 914mm (24)
Tile Size: Stone/Design (tiles per box)	12" x 24" (18) 18" x 36" (8) 12" x 36" (12) 24" x 24" (9)	12" x 24" (18) 18" x 18" (16) 12" x 36" (12) 24" x 24" (9)	12" x 24" (18) 18" x 18" (16)
Weight	5100g/m ²	4290g/m ²	4290g/m ²
EN 649 / EN ISO 10582	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 33, 42	23, 34, 43
ASTM F1700	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
CAN ULC 102.2S	Pass	Pass	Pass
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass
ASTM E662	-	-	<450
ASTM E648	Class 1	Class 1	Class 1
EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I
EN 13893	Class DS (dry)	Class DS (dry)	Class ES (wet)
ASTM D2047	>0.5	>0.5	>0.5
ASTM F970 (MOD)	750psi	750psi	750psi
ASTM F1515	Pass	Pass	Pass
ASTM F925	Meets	Meets	Meets
RRL Pendulum Test	-	-	≥36 (wet test)
Surface Roughness Rz	-	-	≥20µm
DIN 51130	R10	R10	R10
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

	CAMARO PUR	AFFINITY 2 ^{SS} PUR	COLONIA PUR	EXPONA SIMPLAY PUR
Gauge	2mm	2mm	2mm	5mm
Wear Layer	0.3mm	0.55mm	0.2mm	0.7mm
Plank Size: Wood (planks per box)	4" x 36" (36) 6" x 36" (24) 6" x 48" (18) 8" x 48" (14)	7.25" x 48" (15)	4" x 36" (36) 6" x 36" (24) 6" x 48" (18) 7.244" x 48" (15)	7" x 48" (10) 7.24" x 59.25" (8)
Tile Size: Stone/Design (tiles per box)	12" x 12" (36) 12" x 24" (18) 18" x 18" (16)	-	12" x 12" (36) 12" x 24" (18) 18" x 18" (16)	18" x 18" (12) 23.62" x 23.62" (6)
Weight	3600g/m ²	3500g/m ²	3680g/m ²	8000g/m ²
EN 649 / EN ISO 10582	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 31	23, 33, 42	22	23, 34, 43
ASTM F1700	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
CAN ULC 102.2S	Pass	Pass	Pass	Pass
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
ASTM E648	Class 1	Class 1	-	Class 1
EN 649 / EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
ASTM D2047	>0.5	>0.5	>0.5	>0.5
ASTM F970 (MOD)	750psi	750psi	750psi	750psi
ASTM F1515	Pass	Pass	Pass	Pass
ASTM F925	Meets	Meets	Meets	Meets
DIN 51130	R10	R10	R10	R10
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement



Product Specification

POLYFLOR SPORT	
Gauge	6.7mm
Roll Size	2.187 x 20.231 yd = 45.25 yd ²
Weight	Plain 4260g/m ² Maple 4510g/m ²
EN 14904	Conforms
ASTM F1515	Pass
ASTM F925	Meets
EN 13501-1	Class CfI-S1
CAN ULC 102.2S	Pass
EN ISO 9239-1	≥4.5kw/m ²
EN ISO 11925-2	Pass
EN 649 Abrasion Group	Group T
EN 13893	Class DS (dry)
Maintenance Enhancement	Polymer surface treatment

	DIAMANT	NOPPE STUD TILE
Gauge	2mm	3mm, 4mm
Tile Size	-	19.68" x 19.68"
Roll Size	2.077 x 16.404 yd = 30.08 yd ²	-
Weight	3200g/m ²	3mm: 4200g/m ² 4mm: 5600g/m ²
ASTM F1515	Pass	Pass
ASTM F925	Meets	Meets
EN 1817	Conforms	-
EN 12199	-	Conforms
Use Area Classification	23, 34, 42	3mm: 23, 32, 41 4mm: 23, 34, 43
EN 13501-1	Class Bfl-S1	Class CfI-S1
EN ISO 9239-1	≥8kw/m ²	≥4.5kw/m ²
EN ISO 11925-2	Pass	Pass
EN 13893	Class DS (dry)	Class DS (dry)



	SD	FINESSE SD	POLYFLOR EC	OHMEGA EC	CONDUCTIVE ROF†
Gauge	2mm	2mm	2mm	2mm	2mm
Roll Size	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²	2.187 x 21.872 yd = 47.84 yd ²
Tile Size	24" x 24"	24" x 24"	24" x 24"	-	-
Weight	3400g/m ²	3030g/m ²	3500g/m ²	3060g/m ²	3300g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	34, 43	34, 43	34, 43	34, 43	34, 43
Agrément	✓	✓	-	-	-
ASTM F1913	Conforms	Conforms	-	Conforms	Conforms
ASTM F1700	Conforms	Conforms	Conforms	-	-
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass
ASTM E662	<450	<450	-	-	-
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1
ASTM F1515	Pass	Pass	Pass	Pass	Pass
ASTM F925	Meets	Meets	Meets	Meets	Meets
EN 649 Abrasion Group	Group M	Group P	Group M	Group P	Group M
EN ISO 10581	Type II	Type I	Type II	Type I	Type II
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
IEC 61340-4-1 2003 Rc	1 x 10 ⁶ to 1 x 10 ⁹ ohms	1 x 10 ⁶ to 1 x 10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	1 x 10 ⁴ to 1 x 10 ⁶ ohms	-
EN 1081 R1/R2	<10 ⁹ ohms	<10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	10 ⁴ to 1 x 10 ⁶ ohms	<5 x 10 ⁴ ohms
ESD S 7.1	1 x 10 ⁶ to 1 x 10 ⁹ ohms	1 x 10 ⁶ to 1 x 10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	2.5 x 10 ⁴ to 1 x 10 ⁶ ohms	-
BRE Green Guide	A+(Generic)	A+(Generic)	A+(Generic)	A+(Generic)	A+(Generic)
Hygiene	+	+	-	+	-

† Polyflor ROF flooring for explosive handling areas, no protection from short circuit on a 240/250 volt mains. All SD results require minimum 40% R.H.

✚ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

	POLYCLAD PRO PU	POLYCLAD PLUS PU
Gauge	1.25mm	2mm
Roll Size	2.001 x 32.808 yd = 65.66 yd ²	2.187 x 21.872 yd = 47.84 yd ²
Weight	1900g/m ²	3530g/m ²
CAN ULC 102.2S	Pass	Pass
ASTM F1515	Pass	Pass
ASTM F925	Meets	Meets
BS 476: Part 6	-	(I)<12 (ii)<6*
BS 476: Part 7	-	Class 1*
EN 13501-1	B-s2-d0	B-s3-d0
Hygiene	+	+
Maintenance Enhancement	Polyurethane surface treatment	Polyurethane surface treatment

* For details of how this result was achieved (eg. adhesive, plasterboard), contact Polyflor.

CE 1121	
Polyflor Ltd, PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR 13 1121 CPR - KA0058	
EN 15102:2007+A1:2011 Heavy duty wallcoverings	
Reaction to fire class	B-s2-d0 on plasterboard attached with an acrylic based adhesive
Release of formaldehyde	None
Release of other dangerous substances: - of heavy metals and specific elements - of vinyl chloride monomer (VCM)	<10mg/Kg <0.2mg/Kg
Sound absorption	NPD
Thermal resistance	NPD

CE 1121	
Polyflor Ltd, PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR 13 1121 CPR - KA0058	
EN 15102:2007+A1:2011 Heavy duty wallcoverings	
Reaction to fire class	B-s3-d0 on plasterboard attached with an acrylic based adhesive
Release of formaldehyde	None
Release of other dangerous substances: - of heavy metals and specific elements - of vinyl chloride monomer (VCM)	<10mg/Kg <0.2mg/Kg
Sound absorption	NPD
Thermal resistance	NPD

Sustainability Credentials



Sustainability

Polyflor vinyl flooring provides a high performance, cost effective, low maintenance, long-life solution combined with excellent environmental credentials.

Life Cycle Analysis (LCA) is an important way to assess a product's entire environmental impact from start to finish. In third party LCAs including EN 15804 EPD, BRE Global, Ecospecifier and BASTA, Polyflor products perform excellently. Therefore specifying our flooring can help maximise points on a building's environmental assessment including BREEAM, Green Star and LEED®. LCAs are pivotal in providing transparent information and helping decision makers choose the most sustainable product available.

Materials

Our materials are responsibly sourced predominantly through local suppliers who are ISO 14001 certificated like Polyflor, or have a robust EMS. Vinyl is made up of 57% salt (chlorine) and 43% oil (ethylene). Polyflor's vinyl is made up mostly from natural and sustainable materials, this can be up to 85% - salt is one of the world's most abundant natural resources and calcium carbonate is used as filler. We do not use formaldehyde, lead, mercury, cadmium and hexavalent chromium - product is REACH compliant. We do not use non-compliant plasticisers and use a range of ortho-phthalate and non phthalate options.

Manufacturing & Logistics

Energy required per m² of material produced has fallen by 46% since 2000 and carbon emissions have decreased by 18,426 tonnes, due to ambitious ISO 14001 targets. It takes less energy to produce our vinyl than other plastics and at least 15% less energy than linoleum and 50% less than ceramics. Also with a typical 20-25 year life, fewer replacements are required.

Water use minimisation is important and on site rainwater is stored and used, saving a valuable, natural resource. 96% of the water used is recycled water, with just 4% coming from mains supply. Despite increasing sales volumes, wet and dry waste has been significantly reduced with the majority of waste we accrue, being recycled.

Polyflor efficiently distributes product globally through the transportation of full, bulk loads. Polyflor's fleet of HGVs are now more aerodynamic with euro 5 compliant engines for reduced fuel consumption and CO² emissions. Driving efficiencies and miles per gallon have also been improved, further reducing environmental impact. Additionally, vinyl flooring is much lighter than other flooring materials, which produces a positive outcome in transit, reducing fuel consumption.

Performance & Maintenance

Polyflor vinyl flooring is 100% fit for purpose, due to choice, use area, performance and durability without compromising on the environment. The in-use phase of the resilient flooring life-cycle accounts for at least 80% of its environmental impact. Therefore all of our ranges are designed with low maintenance features, whereby energy intensive cleaning is not required. PU, PUR and Polysafe PUR ranges are the easiest to clean, ensuring that use of water (55% less), polish (Polyflor PUR is polish free for life), strippers and chemical cleansers are significantly reduced. Specifiers prefer Polyflor products for their easy maintenance.

VOC emissions on our product ranges are all below industry standards with no negative contribution to indoor air quality. They have passed the most stringent, independent VOC emissions tests including AgBB/DiBT, Eurofins Indoor Air Comfort Gold, FloorScore® and GBCA/NZGBC Green Star IEQ-VOC.

End of Life

Vinyl is 100% recyclable and unlike many other materials, it can be recycled repeatedly without weakening or losing performance. Recycled content can be up to 40%, but on average is around 25% across many high volume ranges.

Polyflor is the largest vinyl flooring manufacturer in the UK, producing a wide range of products. In 2013, 9,570 tonnes of post production waste was recycled. Encouraging reclaim of post consumer waste is equally important to Polyflor and in 2013, 800 tonnes of vinyl waste was recycled back into new product. If it is not feasible to go back into new flooring due to contamination, vinyl is recycled into inferior quality PVC products, such as traffic cones.

BES 6001

"Responsible Sourcing of Construction Products is demonstrated through an ethos of supply chain management and product stewardship and encompasses social, economic and environmental dimensions."

BRE Global

All Polyflor production sites have been audited for BES 6001 (a complete sustainability standard from the BRE) achieving 'very good' certification. BES 6001 is a framework standard for the responsible sourcing of construction products and sets out requirements under three main headings:


Organisational Management Supply Chain Management Environmental & Social Issues

To meet this standard and achieve a 'very good' rating, Polyflor has satisfied the compulsory sections as well as conforming to higher levels of compliance through seventeen principles of responsible sourcing.

The principles include:

- Ethics
- Legal Compliance
- Management Systems
- Supply Chain Management
- Stakeholder Engagement
- Complaints & Prosecutions
- Health & Safety
- Fundamental Rights at Work
- Climate Change & Energy
- Resource Use
- Site Stewardship
- Water
- Waste Management
- Transport Impacts
- Employment & Skills
- Local Communities
- Contribution to the Built Environment

A comprehensive report on Polyflor's sustainability can be found at www.polyflor.com/environment.



Flooring Collection

Homogeneous

2-3	Pearlazzo PUR	6-7	2000 PUR
4	Prestige PUR	8-9	XL PU
5	Classic Mystique PUR	10	Standard XL

Semi Flexible Tiles

11	Polyflex Plus PU
----	------------------

Safety (Polysafe)

12	Modena PUR	19	Standard PUR
13	Arena PUR	20	Hydro
14-15	Verona PUR	21	Hydro Evolve
16	Mosaic PUR	22	Wood fx PUR
17	Apex	23	Wood fx Acoustix PUR
18	NEW Vogue Ultra PUR	40-41	Expona Control PUR

Heterogeneous

24	Forest fx PUR	30	NEW Bloc PUR
25	Acoustix Forest fx PUR	31-33	NEW Silentflor PUR
26-29	Expona Flow PUR		

Acoustic

23	Wood fx Acoustix PUR	31-33	NEW Silentflor PUR
25	Acoustix Forest fx PUR		

Luxury Vinyl Tiles

34-37	Expona Commercial PUR	48-49	NEW Camaro PUR
38-39	Expona Design PUR	50	Colonia PUR
44-45	Expona Control PUR		
46-47	Affinity 2 ⁵⁵		

Loose Lay Tiles

40-43	Expona SimpLay PUR
-------	--------------------

ESD

51	SD Collection
52	EC Collection

Wall Cladding

53	Polyclad Pro PU
53	Polyclad Plus PU

Sport

54	Polyflor Sport
----	----------------

Rubber Flooring

55	Diamant
56	Noppe Stud Tile

Flooring Accessories

57	Ejecta
----	--------

Product Specifications

58-65	
-------	--

Quick Ship Ranges

2-3	Pearlazzo PUR	24	Forest fx PUR
5	Classic Mystique PUR	26-29	Expona Flow PUR
6-7	2000 PUR	24	Forest fx PUR
8-9	XL PU	34-37	Expona Commercial PUR
14-15	Polysafe Verona PUR	54	Polyflor Sport 67 PU
17	Polysafe Apex	57	Ejecta (CF20,MC8c and CS only stocked items).
19	Standard PUR		

POLYFLOR™ INTERNATIONAL

Australia

Polyflor Australia
Tel: +61 3 9215 4400
Tel: 1800 777 425
E-mail: sales@polyflor.com.au

Canada

Polyflor Canada Inc.
Tel: +1 905 364 3000
E-mail: sales@polyflor.ca

China

Polyflor Hong Kong
Tel: +(852) 2865 0101
E-mail: info@polyflor.com.hk

France

James Halstead France SAS
Tel: +33 (0) 8 20 20 32 11
E-mail: info@jhfrance.fr

Germany

objectflor Art und Design Belags GmbH
Tel: +49 (0) 2236 966 330
E-mail: info@objectflor.de

India

Polyflor India Pvt Ltd
Tel: +91 22 4023 2485
E-mail: info@polyflor.co.in

Ireland

Polyflor Ireland
Tel: +353 (1) 864 9304
E-mail: salesireland@polyflor.com

New Zealand

Polyflor New Zealand
Tel: +64 9 269 1111
Tel: 0800 765 935
E-mail: sales@polyflor.co.nz

Norway

Polyflor Nordic
Tel: +47 23 00 84 00
E-mail: firmapost@polyflor.no

Poland

Polflor Sp. Z o.o.
Tel: +48 (0) 61 820 3155
E-mail: polyflor@polflor.com.pl

Russia

Polyflor Contract Ltd
Tel: +7 (812) 332 42 02
E-mail: info@polyflor.ru

South Africa

Poly Sales Africa (Pty.) Ltd
Tel: +27 11 609 3500
E-mail: info@polyflor.co.za

Sweden

FalckDesign AB
Tel: +46 (0) 300 15820
E-mail: info@falckdesign.com



@polyflor_canada

www.polyflor.ca

samples >>> direct

>>>> 1 905 364 3000

POLYFLOR CANADA INC.

6350 NORTHWEST DRIVE MISSISSAUGA, ON L4V 1J7 CANADA

POLYFLOR CANADA INC. SALES: 1 905 364 3000

POLYFLOR CANADA INC. SAMPLES: 1 905 364 3000

SALES E-MAIL:

SALES@POLYFLOR.CA

SAMPLES E-MAIL:

SAMPLES@POLYFLOR.CA

WEBSITE:

WWW.POLYFLOR.CA