STANDARD SMOOTH **WITHOUT PUR**

MAINTENANCE REGIME


















or Kentucky mop wrung out to prevent over-application of polish.




The polish should be applied up to 150mm from the edges of the room, and subsequent coats should be applied at 90o to the previous one. The final coat should be applied right up to the edges of the room.




To enable a protective film to develop as quickly as possible, the floor maintainer should be used undiluted for the first 2-3 applications, and, thereafter, in accordance with the manufacturer's instructions.



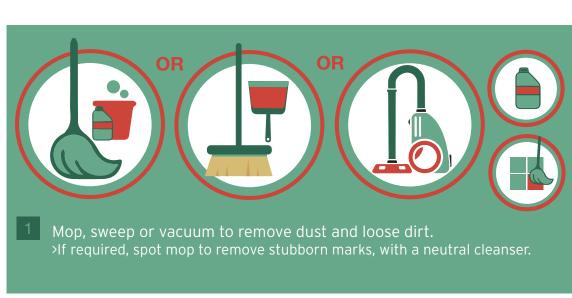





An unsightly build-up of polish should be avoided. The polish should be removed regularly – the interval between application and removal depends on the wear conditions and the number of polish layers (normally six months in heavy traffic areas). Follow the manufacturer's instructions.





- > Always follow the Health and Safety guidance provided.
- > Regular cleaning is more beneficial to the floor covering and more cost-effective than occasional heavy cleaning.

If in doubt please contact Polyflor Canada.

For more detailed information visit, www.polyflor.ca or e-mail tech@polyflor.ca with any maintenace questions.

Polyflor Canada Inc. Tel: +1 905 364 3000 Email: sales@polyflor.ca