
STANDARD SMOOTH VINYL WITH PUR MAINTENANCE REGIME





INITIAL CONSTRUCTION CLEAN



Remove all loose debris. > Ensure that all traces of adhesive are removed from the surface of the floor covering > Sweep or vacuum to remove dust and grit.



2 Damp mop with a neutral detergent.

> If required, dry buff with a 1000 rpm plus rotary machine fitted with a 3M red or white pad.






Damp mop with a neutral detergent.



> If required, dry buff with a 1000 rpm plus rotary machine fitted with a 3M red or white pad.



DAILY MAINTENANCE

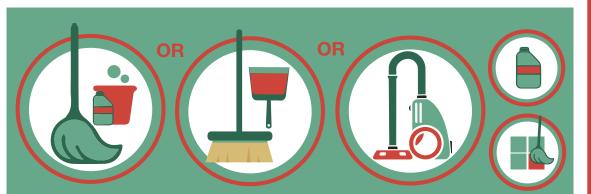

Mop, sweep or vacuum to remove dust and loose dirt. >If required, spot mop to remove stubborn marks, with a neutral cleanser.



WEEKLY MAINTENANCE


ADDITIONAL INFORMATION



Assess the appearance of the floor. > If required, light scuffing - dry buff with a 1000 rpm plus rotary machine fitted with a 3M red or green pad.



> If required, heavier scuffing – spray clean using a floor maintainer and 165 rpm plus rotary machine fitted with a 3M red or white pad.

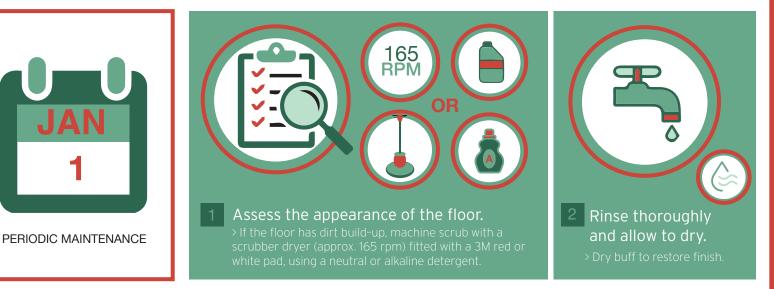



> Always follow the Health and Safety guidance provided
> The maintenance regime requires the installation of an effective barrier matting system.

> Twister pads or any type of abrasive pad containing diamond shreds should only be used on smooth floors as part of a deep set cleaning and never for daily or frequent cleaning purposes.

If in doubt please contact Polyflor Canada.

For more detailed information visit, www.polyflor.ca or e-mail tech@polyflor.ca with any maintenace questions.

Polyflor Canada Inc. Tel: +1 905 364 3000 Email: sales@polyflor.ca