



CAMARO™
LOC
INTERLOCKING LVT COLLECTION



LOC
MECHANISM



FAST
INSTALLATION



WATER
RESISTANT



EASY
CLEAN



QUIET
UNDERFOOT



COMFORT
UNDERFOOT

THE COLLECTION

Camaro LOC was first launched in Europe in 2014, quickly establishing itself as a leading brand within the residential and light commercial flooring markets. Retailers and contractors alike have come to use this range on a regular basis due to the suitability of the product, the solid specification, the unique designs, the continued availability and the guaranteed high quality that Polyflor is known for.

The collection features our original flexible LVT locking mechanism making it the ideal flooring solution when installed over Polyflor Vinyl LOC Underlay.

Significant investment has been made to ensure we offer our customers a balanced and contemporary residential collection which will find itself equally at home within housing, condominiums or retirement homes.

KEY FEATURES


- 24 authentic replications of wood, stone, slate and concrete
- Variety of representative plank & tile sizes
- Featuring a range of realistic surface textures
- 0.3mm wear layer - Ideal for residential and light to moderate commercial interiors
- 2G locking mechanism
- Micro Bevel on all 4 sides of the plank/tiles to give added realism
- 10-year guarantee
- PUR surface treatment for ease of maintenance

SPECIFICATION

- Total Gauge: 4.0mm
- Wear Layer: 0.3mm
- Surface Treatment: Polyurethane reinforcement (PUR)
- Plank Sizes: 145.6 x 907.6mm (5.73 x 35.73") (15 planks/box = 1.98m²) 177.4 x 1212.4mm (6.98 x 47.73") (9 planks/box = 1.94m²)
- Tile Sizes: 298 x 602.8mm (11.73 x 23.73") (11 tiles/box = 1.98m²)




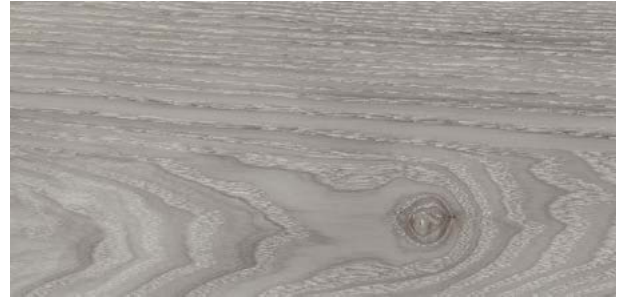
3461 Clara Oak

177.4 x 1212.4mm 



3441 White Limed Oak

145.6 x 907.6mm 




3427 Grey Mountain Ash

145.6 x 907.6mm 




3462 Devonshire Oak

177.4 x 1212.4mm 




3463 Grey Driftwood

177.4 x 1212.4mm 




3437 Smoke Limed Oak

177.4 x 1212.4mm 




3465 Dockyard Timber

177.4 x 1212.4mm 



3438 Tan Limed Oak

177.4 x 1212.4mm 



3466 Vienna Oak

177.4 x 1212.4mm 



3467 Manor Oak

177.4 x 1212.4mm

R10



3439 Hickory Oak

177.4 x 1212.4mm

R10



3442 Evergreen Oak

177.4 x 1212.4mm

R10



3429 Summer Maple

145.6 x 907.6mm

R10



3431 Apple Tree

145.6 x 907.6mm

R10



3443 Butternut Oak

177.4 x 1212.4mm

R10



3432 Rich Valley Oak

145.6 x 907.6mm

R10



3446 Vintage Timber

145.6 x 907.6mm

R10



3436 Laurel Dark Oak

177.4 x 1212.4mm

R10



3468 Flamed Oak


177.4 x 1212.4mm

R10



R10


3457 Isla Concrete

298 x 602.8mm 



R10


3452 Grey Flagstone

298 x 602.8mm 



R10

3458 Maison Concrete

298 x 602.8mm 



R10

3453 Black Shadow Slate

298 x 602.8mm 




R10

3455 Classic Yorkstone

298 x 602.8mm 

Decoration and shade may vary from the samples shown.


For final colour selection a larger sample should be used which Polyflor can provide.

 All designs achieve R10, which is an ex-factory measure of slip resistance

 All designs feature a micro bevel edge



TECHNICAL SPECIFICATION

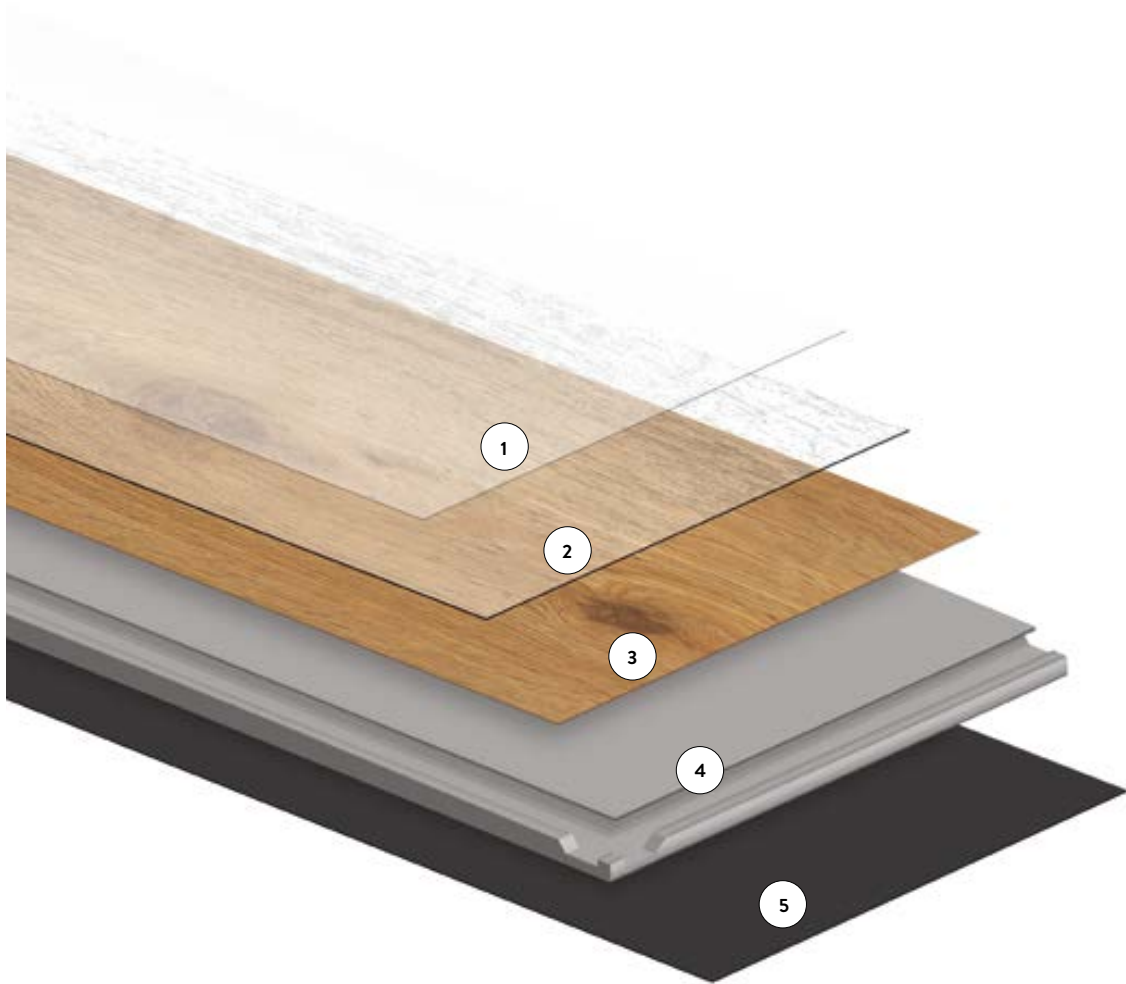

PRODUCT CONSTRUCTION

- ① **Polyurethane Reinforcement (PUR)**
Thanks to a factory-applied polyurethane reinforcement (PUR), there is less work for you to do to care for your floor.
- ② **Wear Layer**
This transparent, extremely dense layer is hard-wearing and protects the decoration of the product. This allows the surface embossing to create a highly authentic effect.
- ③ **Decoration Layer**
Each design has been specifically developed for Camaro Loc by means of extensive trend research and the commissioning of experienced product designers.
- ④ **Interlocking Stabilization Layer**
Improved dimensional stability is achieved by minimizing the effect of surrounding physical properties. The locking mechanism allows for a quick and easy installation.
- ⑤ **Load-Bearing Layer**
The basis for the long service life and high performance of Camaro Loc.

CHARACTERISTICS	CAMARO LOC
Type of floor covering EN 649 / EN ISO 10582	Heterogeneous, PVC
Reinforcement	Polyurethane (PUR)
Total weight EN 430 / EN ISO 23997	7,025 g/m ²
Performance classification EN 685 / EN ISO 10874	23 / 31
Gauge EN 428 / EN ISO 24346	4.0mm
Wear layer thickness EN 429 / EN ISO 24340	0.3mm
Plank size and packaging details (excluding tongue & groove) EN 427 / EN ISO 24342	15 @ 145.6 x 907.6mm = 1.98m ² 9 @ 177.4 x 1212.4mm = 1.94m ²
Tile size and packaging details (excluding tongue & groove) EN 427 / EN ISO 24342	11 @ 298 x 602.8mm = 1.98m ²
Residual indentation EN 433 / EN ISO 24343-1	≤ 0.05mm
Abrasion resistance EN 649 / EN ISO 10582	Group T, Type I
Dimensional stability EN434 / EN ISO 23999	≤ 0.1%
Colour fastness to artificial light* ISO 105-B02	Level ≥ 6 method A
Behaviour to fire EN 13501-1	Bfl - S1
Slip resistance** EN 13893 DIN 51130 AS 4586	Class DS (dry condition) R10 R10
For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges	
VOC emissions Indoor Air Comfort Gold AgBB Floorscore Finnish M1 Classification	Eurofins certified product Very low emissions Certified product Pass
Responsible sourcing BES 6001	Very Good
Chemical resistance EN 423 / EN ISO 26987	***
Castor chair suitability EN425 / EN ISO 4918	Suitable
Underfloor heating suitability EN 1264-2	Suitable, max. 27°C

* We recommend that adequate UV protection be taken against products being installed in direct sunlight as fading may occur.

** For clarification regarding slip resistance, consult Polyflor.

*** Resistant depending on concentration and time of exposure. In case of increased impact of oils, grease, acids, alkalis and other aggressive chemicals, please contact us.



3446 VINTAGE TIMBER



3465 DOCKYARD TIMBER



3439 HICKORY OAK



3438 TAN LIMED OAK



3463 GREY DRIFTWOOD





3452 GREY FLAGSTONE



3453 BLACK SHADOW SLATE




3458 MAISON CONCRETE



3455 CLASSIC YORKSTONE

IDEAL SOLUTION FOR A FAST & EASY FLOORING TRANSFORMATION

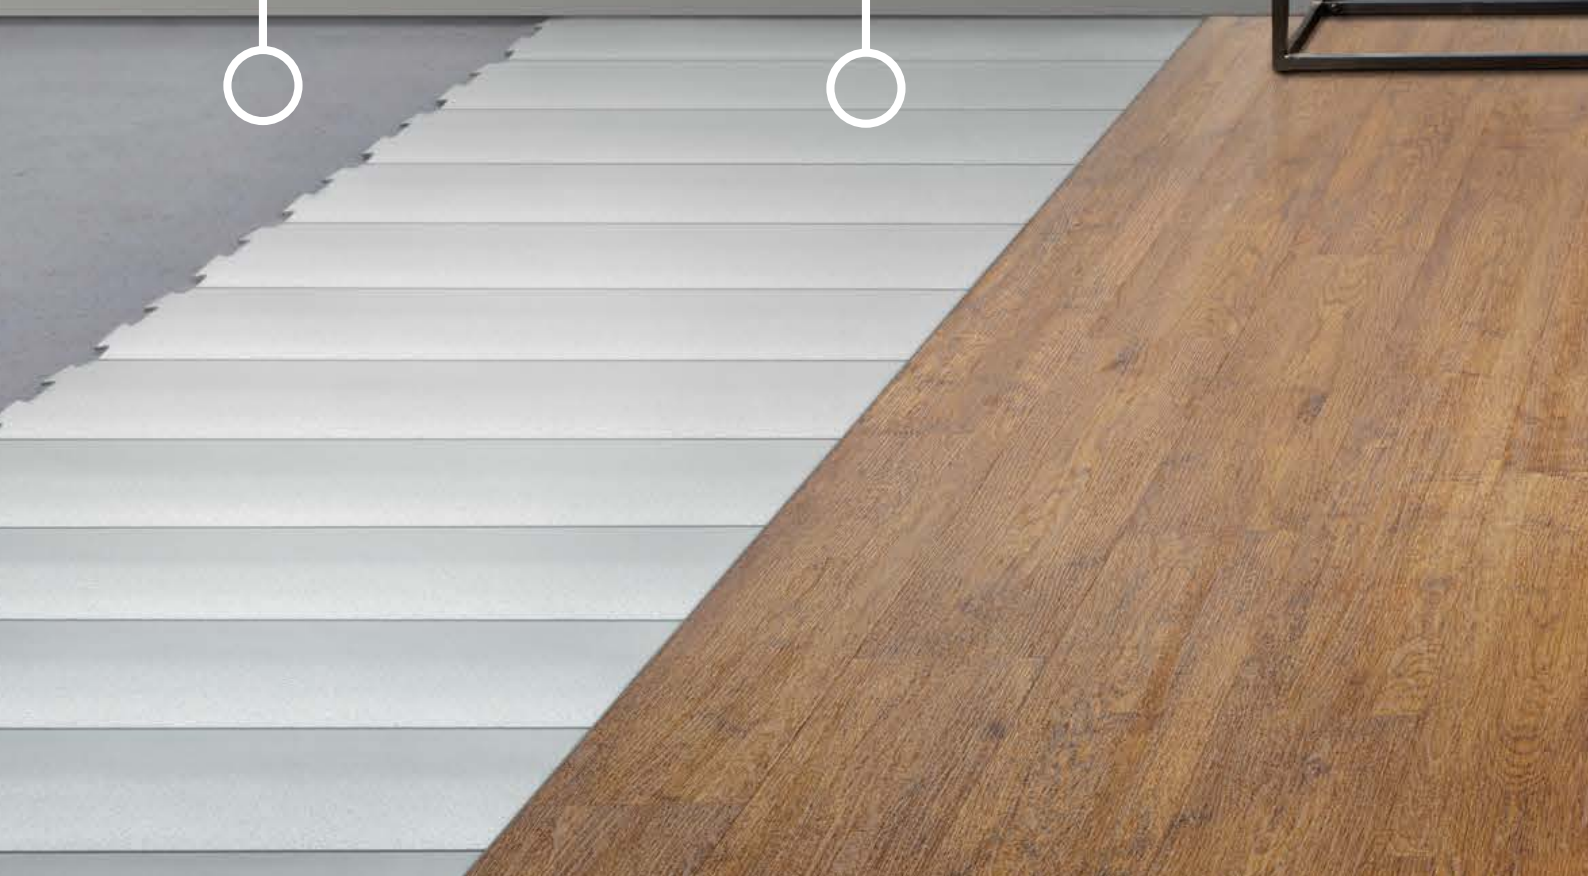



INSTALLATION INSTRUCTIONS

We recommend Camaro Loc is installed by a flooring professional over Polyflor Vinyl Loc Underlay. Providing a consistent surface, optimised for the installation of interlocking vinyl flooring, Vinyl Loc Underlay acts as a shock-absorber when walked across and reduces impact sound transmitted through neighbouring rooms. It is also suitable for use over underfloor heating due to its low thermal resistance, giving you a floor covering that is stable, even, quiet and comfortable.



Vinyl Loc Underlay

- ▶ Simple to use and easy to install
- ▶ Anti-slip surface
- ▶ Smooths out minor subfloor imperfections
- ▶ Acoustic benefits (19dB)

YOU WILL NEED

- 1 Vinyl Loc Underlay
- 2 Expansion spacers
- 3 Carpenter's 90° square
- 4 Pencil
- 5 Utility knife
- 6 Retractable measuring tape or folding ruler
- 7 Handsaw/Hacksaw (for cutting around fixtures only)
- 8 Drill (when installing around radiator pipes only)

The use of safety glasses and protective gloves should also be considered



FREE SAMPLES

Visit our website or email the
Polyflor Samples inbox at
samples@polyflor.ca

TECHNICAL SUPPORT

If you require further technical data, contact
Polyflor Customer Technical Services at
tech@polyflor.ca

SALES SUPPORT

For further assistance, contact
Polyflor Sales Support Team at
sales@polyflor.ca

