



Acoustifoam

ACOUSTIFOAM

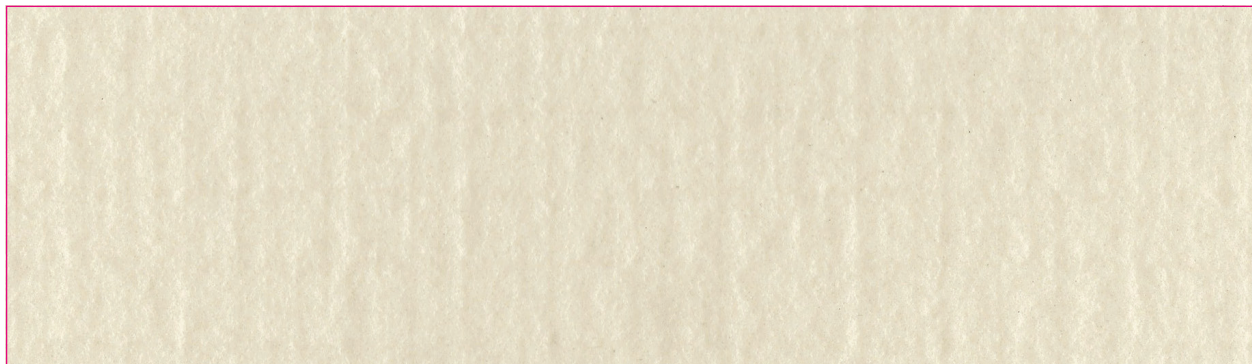


Acoustifoam

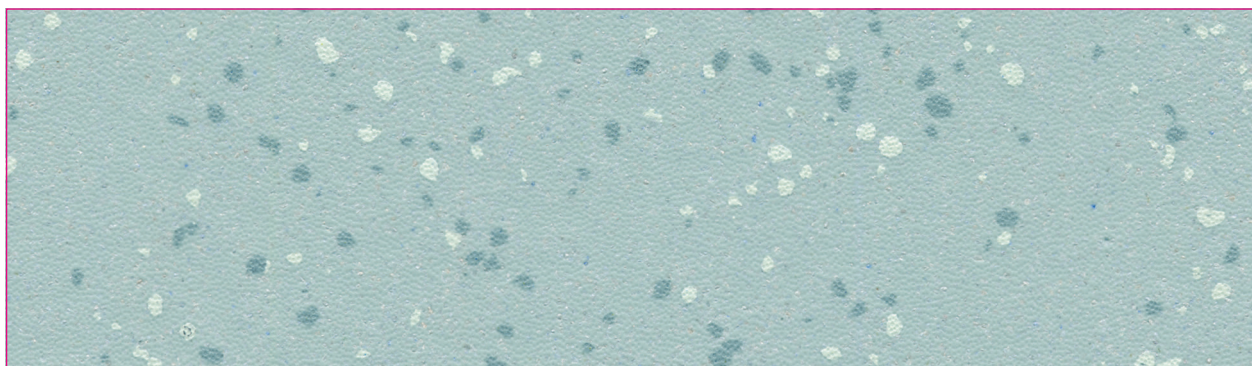

Polysafe Verona Fresh Mint **5209** with Acoustifoam



Pearlazzo Atlantic Mist **9711** with Acoustifoam

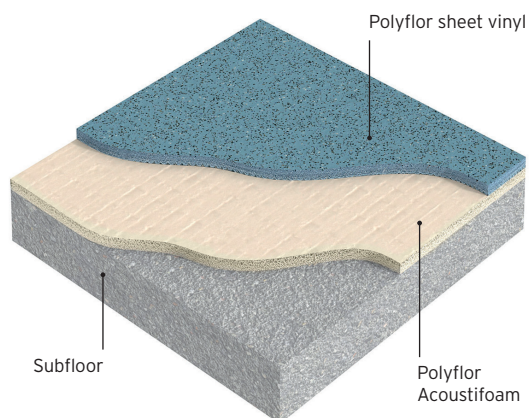

Acoustifoam

Polyflor's Acoustifoam is closed cell PVC foam backing sheet which significantly reduces impact sound. Designed to be installed beneath standard Polyflor vinyl to achieve an impact sound reduction level of 18dB. Ideal for use in hospitals, schools, high rise buildings and other locations where noise reduction is required. Acoustifoam allows an expansive choice of colours, styles and performance characteristics when paired with 2mm Polyflor Vinyl.



Total Thickness

EN 428/EN ISO 24346

2mm



Roll Size

EN 426/ISO 24341

2m x 20m = 40m²



Total Weight

EN 430/ISO 23997

680g/m²



Reaction to Fire*

EN 13501-1

EN ISO 9239-1
EN ISO 11925-2

Class Bfl-S1
Class Cfl-S1 (when laid underneath Polyflor Heterogeneous vinyl)
≥8kw/m²
Pass

*Figures based on Acoustifoam laid underneath Forest fx, Pearlazzo PUR, Prestige PUR, Polysafe Verona PUR, and Polysafe Standard PUR



Acoustical Impact Noise Reduction

EN ISO 140-8
ISO717/2

2mm Polyflor Vinyl + Acoustifoam: 18dB



For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com.
The data presented is correct at the time of printing. For latest information, please visit our website polyflor.com.

