



CLASSIC MYSTIQUE

CLASSIC MYSTIQUE PUR

Classic Mystique has a tonal nondirectional appearance, featuring a duotone chip decoration with marbleized tonal highlight chips.

Ideally suited for busy healthcare, education and a wide variety of commercial environments, the cross-linked and UV cured polyurethane reinforcement (PUR) offers a low cost, polish-free maintenance regime for the lifetime of the flooring.

- Homogeneous sheet available in 24 colours.

- PUR no wax, no finish, low maintenance.

- R9 slip resistance per standard DIN 51130.





Classic Mystique PUR



Technical Specification

Product Format		
Gauge	ISO 24346 (EN 428)	2.0mm
Total Weight	ISO 23997 (EN 430)	3250g/m ²
Finish	PUR	
Performance Requirements		
General Performance	ISO 10581	Conforms
	ASTM F1913	Conforms
	ASTM F1700	Class I, Type A
Use Area	ISO 10874 (EN 685)	23, 34, 43
Slip Resistance	EN 13893	Class D5
	DIN 51130 /	R9
	DIN EN 16165 Ann. B	
	AS 4586	R9
	ASTM D2047	SCOF ≥0.6
Binder Content	ISO 10581	Type I
Reaction to Fire	EN 13501-1	Class Bfl-S1
	ASTM E648	Class 1
	ASTM E662	<450
	CAN/ULC S102.2	FSV < 300; SDV < 500
	BCA Spec C1.10 Clause 3	Complies
	AS ISO 9239-1	>8.0 kW/m ²
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ASTM F970 (Modified)	≤0.005" (750 psi)
	ISO 24343-1	≤0.10mm
Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
Flexibility	ASTM F137	Pass
Underfloor Heating	Suitable, max 27°C	
Light Fastness	ISO 105-B02 (Method 3)	≥6
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets

Sustainability		
BRE Green Guide		A+ ENP 472
GreenTag	LCA Rate Gold Plus	GreenRate level A
Generic EN 15804 EPD	Available	
Recyclable	100%	
Recycled Content	25%	
REACH	Compliant	
Indoor Air Comfort Gold	Eurofins certified product	
FloorScore	Certified	
Finnish M1 Classification	Certified	
AgBB/ABG	Pass	
VOC Emissions	TVOC after 28 days	≤ 10µg/m3
Responsible Sourcing	BES 6001	Excellent

Acoustic Performance		
Impact Sound Reduction	ISO 10140-3	4dB

Maintenance Performance		
Resistance to Chemicals	ISO 26987 (EN 423)	Good resistance
	ASTM F925	Good resistance
Alco Hand Gels	Compatible for use with most commonly used alco-based hand gels	
Steam Cleaning	Suitable for steam cleaning on a periodic basis	
All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products.		
The implementation of an effective cleaning regime is the most important defence against infection. Regular light maintenance is more cost-effective than periodic heavy maintenance and more beneficial to the floor covering.		

Hygiene		
Bacterial Resistance	ISO 846 Part C	Does not favour growth
Ease of Radioactive Decontamination	ISO 8690	Excellent

Sheet & Tile Sizes

Format	Size	Shades	Coverage per Roll
Sheet	2m x 20m (2.187 yds x 21.872 yds)	24	40m ² (47.834 yds)

Format	Size	Shades	Quantity per Box	Coverage per Box
Tile	300mm x 300mm (11.81" x 11.81")	24	50	4.5m ² (48.437ft ²)
	608mm x 608mm (23.937" x 23.937")	24	14	5.17m ² (55.649ft ²)


Classic Mystique PUR




Silent Dove 1540
NCS S 1002-Y w/r 1540 LRV 66




Quartz 1400
NCS S 2500-N w/r 9340 LRV 50




Pale Slate 1200
NCS S 3502-B w/r 1200 LRV 47




Steel Parade 1550
NCS S 3500-N w/r 1550 LRV 36




Smokestone 1160
NCS S 4502-G w/r 9120 LRV 28




Nocturne 1380
NCS S 6502-B w/r 8270 LRV 13




Atlantic Surf 1590
NCS S 1510-R80B w/r 1590 LRV 58




Ladoga 1410
NCS S 2010-R90B w/r 1410 LRV 46



Cloudburst 1210
NCS S 2040-R90B w/r 1210 LRV 32



Mountain Lake 1330
NCS S 3020-R90B w/r 8350 LRV 28



Delta Blue 1220
NCS S 6020-R80B w/r 1220 LRV 11



Lemon Zest 1140
NCS S 1060-Y10R w/r 1140 LRV 58



Silver Mist 1430
NCS S 1505-Y40R w/r 1430 LRV 62



Soft Almond 1560
NCS S 1505-Y40R w/r 1560 LRV 64



Satinwood 1370
NCS S 1505-Y30R w/r 8320 LRV 55




Shoreline 1460
NCS S 2020-Y30R w/r 1460 LRV 55




Nut Husk 1570
NCS S 3005-Y50R w/r 1570 LRV 38



Sorrel Bay 1580
NCS S 3010-Y30R w/r 1580 LRV 36




Cloud Stone 1530
NCS S 4502-Y w/r 1530 LRV 25




Smoked Truffle 1190
NCS S 7005-Y20R w/r 1190 LRV 12



Asparagus 1320
NCS S 3010-G50Y w/r 8360 LRV 37



Spring Meadow 1150
NCS S 3050-G40Y w/r 1150 LRV 22



Rich Chocolate 1520
NCS S 7010-Y50R w/r 1520 LRV 10




Sunblaze 1260
NCS S 3060-Y90R w/r 1260 LRV 14

w/r - Weld Rod

LRV - Light Reflectance Value

NCS - Natural Colour System

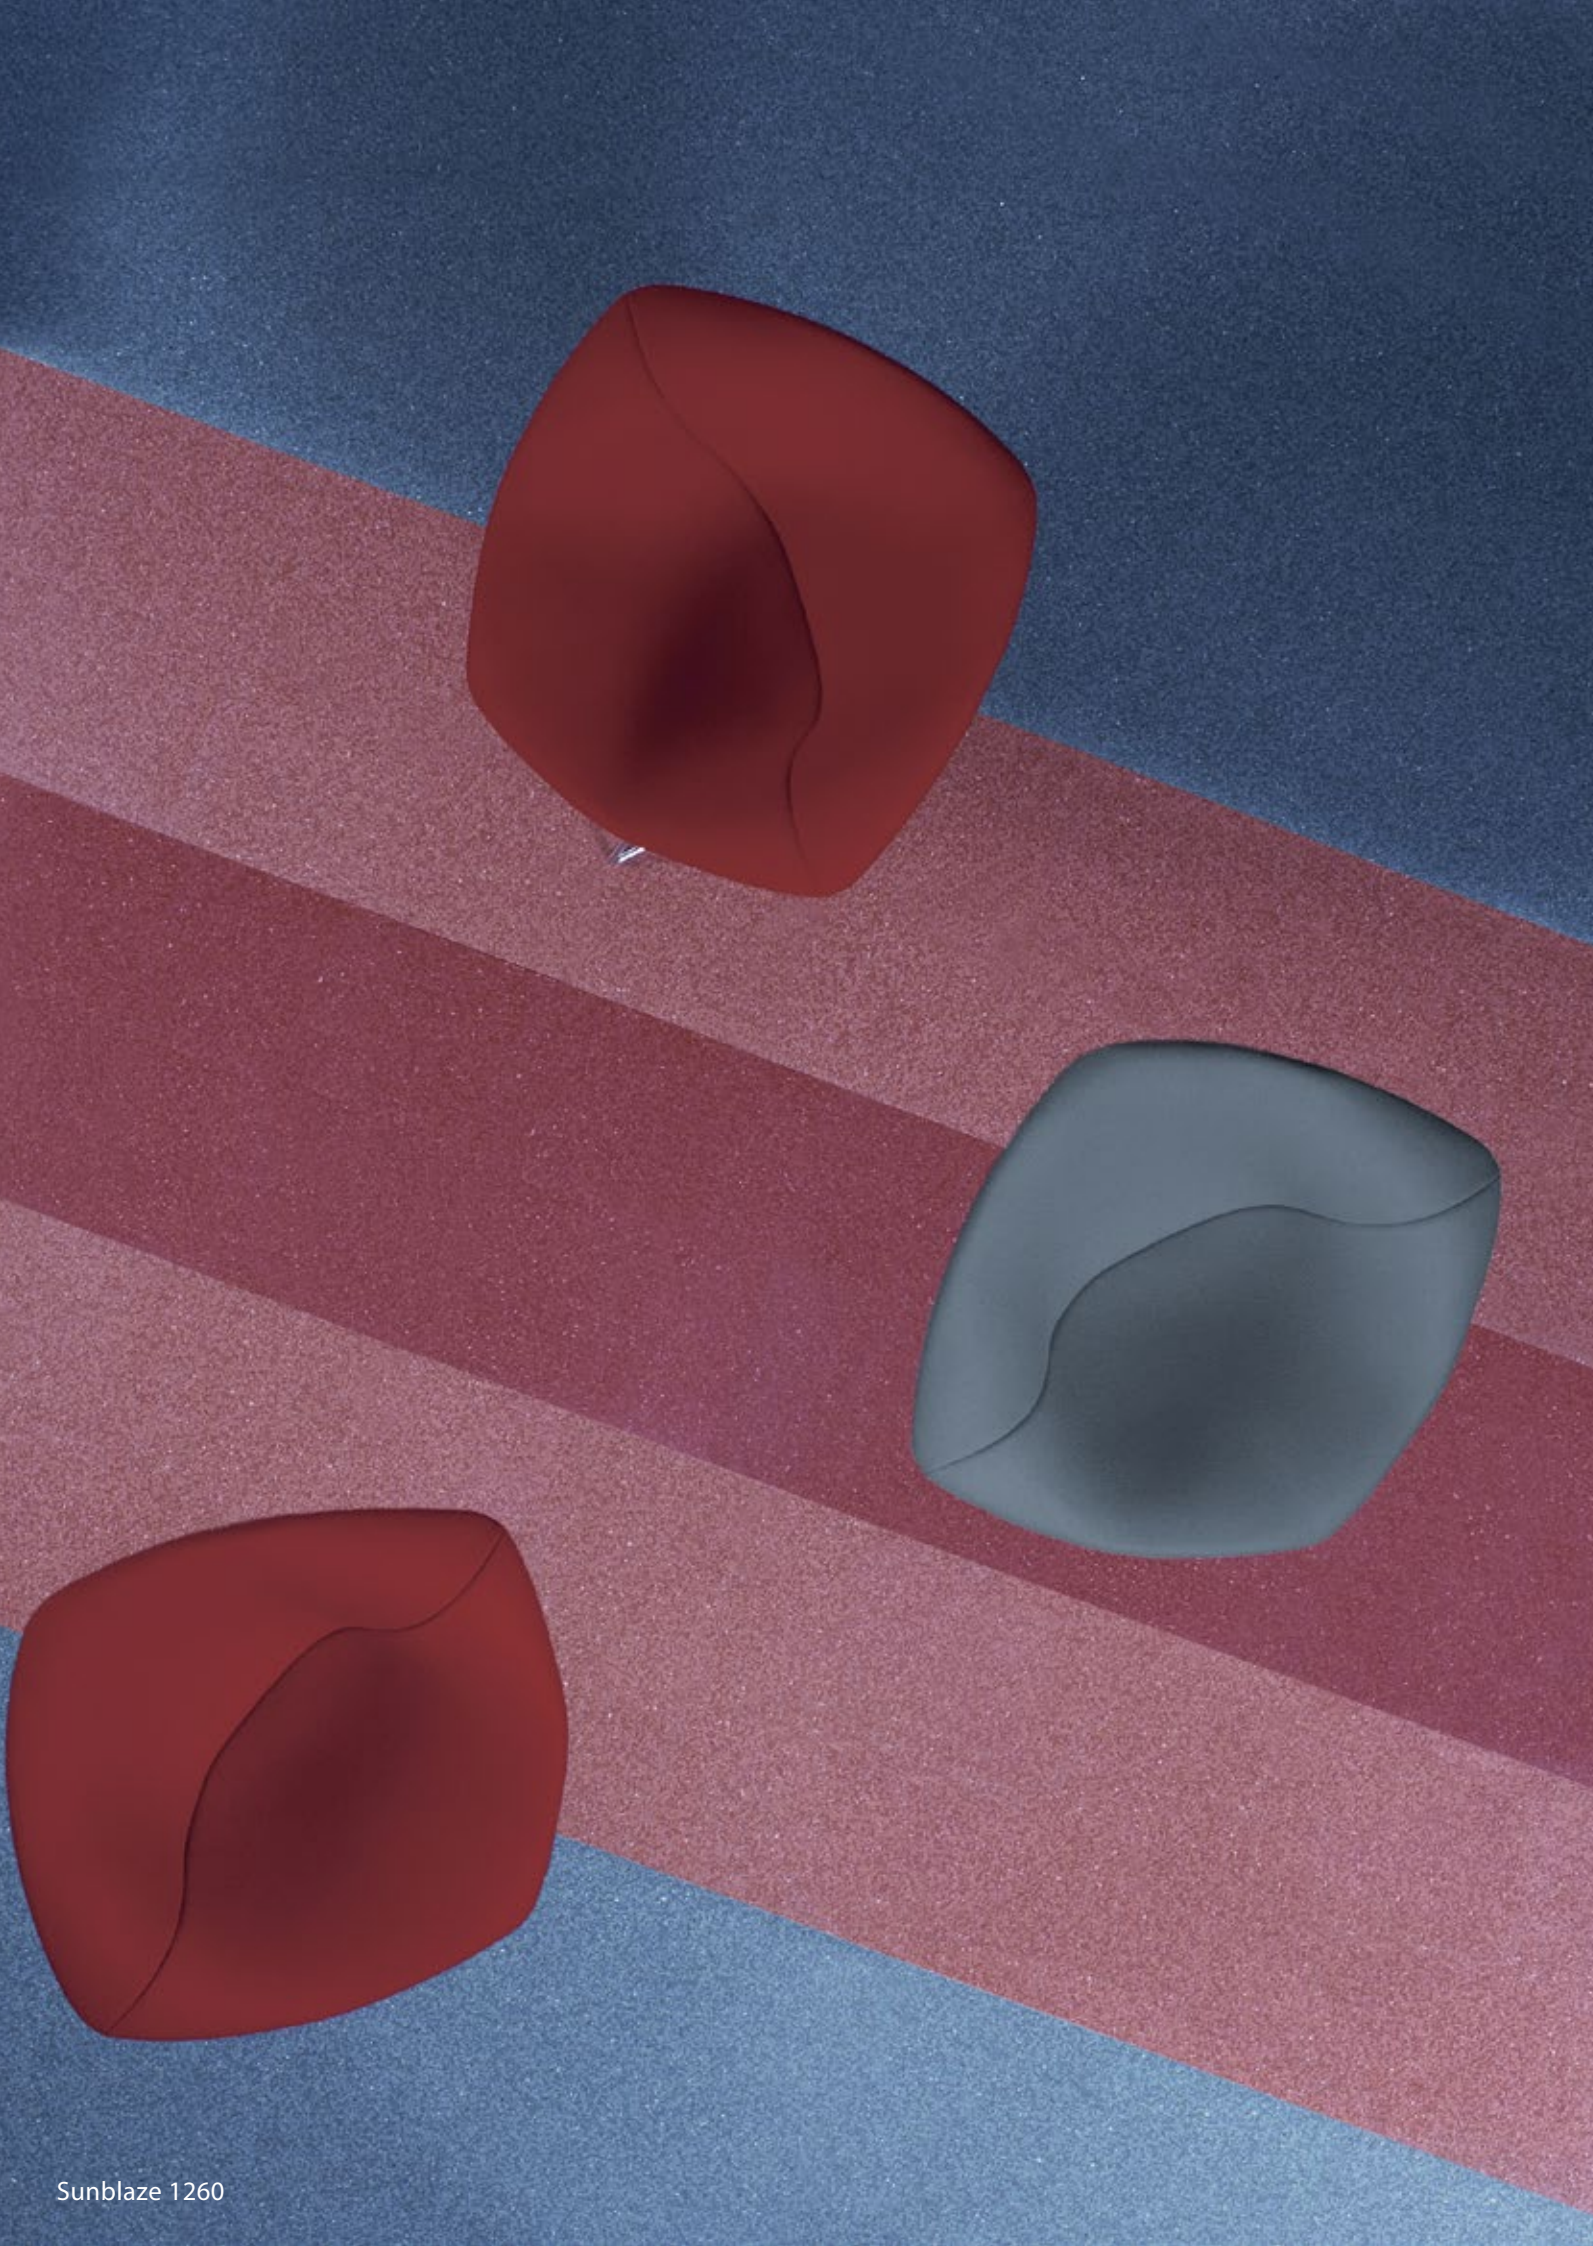

Sunblaze 1260



Pale Slate 1200



Satinwood 1370

All you need to know

Our history

Founded in 1915, James Halstead plc, the parent company of Polyflor Ltd, was originally a textile company based in Manchester, UK, until the 1950's when it pioneered the development of homogeneous vinyl floorings.



Responsible sourcing

Polyflor is proud to be the first flooring manufacturer to be awarded BES 6001 certification for the Responsible Sourcing of Construction Product, achieving an Excellent rating. This is a recognised standard certified by BRE Global which proves that a manufacturer is using materials that have been responsibly sourced and acts responsibly.




Help is here

Polyflor has dedicated and experienced personnel within its sales, marketing, technical and design departments, to provide comprehensive support to our customers. We are ready to assist with queries on topics such as product selection, specification, installation, performance and ongoing maintenance.




Product innovation

In collaboration with industry partners, Polyflor is working on developments in new products and technologies. Recent launches include a non-directional homogeneous sheet collection that keeps waste to a minimum and loose lay adhesive-free safety sheet and high design tile and plank flooring for quick turnaround projects.

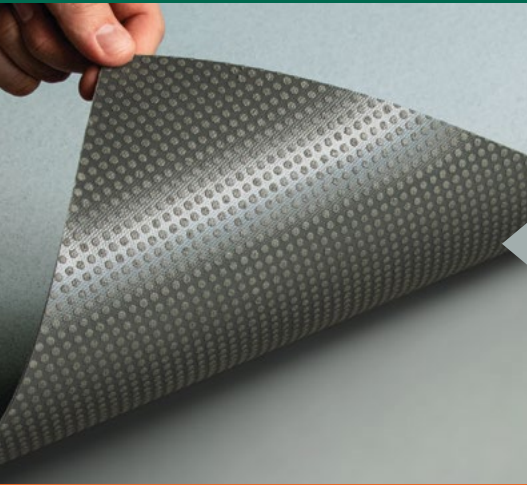

Design service

Our designers can provide visuals and advise colours and product choices when you're looking to create a memorable floor design. We offer the precision and the flexibility of waterjet cutting to produce any design you require.

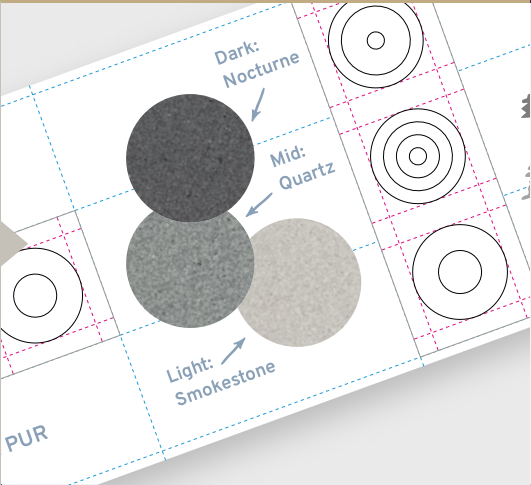

BIM objects

A selection of Polyflor's market leading product ranges are now available as Building Information Modelling (BIM) objects. These objects can be downloaded free of charge from the NBS National BIM Library or www.polyflor.com/bim and www.bimobject.com

Commitment to our supply chain

With ISO 9001 Quality Management and ISO 14001 accreditation, the availability of consistent, good quality products is ensured. We test our products to a wide range of international standards, including slip resistance and VOC emissions, to back-up their performance.



Flooring when you need it

Thanks to Polyflor's extensive warehousing facilities and commitment to holding large quantities of stock, we can react quickly to orders and offer faster lead times for our customers. Polyflor products are readily available worldwide through our wide network of supporting agents and wholesale partners.



Training at Polyflor

To encourage best practice throughout the flooring sector, Polyflor offers both floor laying and floor cleaning courses in a purpose-built facility. For more info contact info@polyflor.ca



Recycling vinyl

Polyflor is a co-founding and funding member of Recofloor, the UK flooring industry's leading vinyl take back scheme for waste vinyl off-cuts and smooth uplifted flooring. For more information about the Recofloor recycling scheme visit www.recofloor.org



Low maintenance

Polyflor's PUR polyurethane reinforcement is cross linked and UV cured for enhanced protection, optimum appearance retention and superior cleaning benefits such as an easier more environmentally friendly maintenance regime. For further in-depth and tailored information on floor maintenance, visit www.polyflor.ca



Free samples

To request free individual product samples of any of Polyflor's flooring collections, visit www.polyflor.ca or email us at samples@polyflor.ca. Alternatively, you can call the dedicated Polyflor Sample Hotline on (905) 364-3000



Delta Blue 1220



Cloudburst 1210

POLYFLORTM INTERNATIONAL

Australia
Polyflor Australia
Tel: 1800 777 425
Email: sales@polyflor.com.au

Canada
Polyflor Canada Inc.
Tel: +1 905 364 3000
Email: sales@polyflor.ca

China
Polyflor Hong Kong O/B Polyflor Ltd.
Tel: +(852) 2865 0101
Email: info@polyflor.com.hk

Colombia
Polyflor Ltd. (LATAM Office)
Tel: +57 3223082375
Email: info@polyflor.com

France
James Halstead France SAS
Tel: +33 (0)8 20 20 32 11
Email: info@jhfrance.fr

Germany
objectflor Art und Design Belags GmbH
Tel: +49 (0) 2236 966 330
Email: info@objectflor.de

India
Polyflor India Pvt Ltd.
Tel: +91 22 4023 2485
Tel: +91 22 4023 2486
Email: info@polyflor.co.in

Ireland
Polyflor Ireland
Tel: +353 (1) 864 9304
Email: salesireland@polyflor.com

Malaysia
Polyflor Martex
Tel: 1300 80 7788
Email: sales@polyflor.com.my

Middle East
Polyflor FZE
Tel: +971 50 406 8114
E-mail: aelwakil@polyflorfze.ae

New Zealand
Polyflor New Zealand Ltd.
Tel: 0800 765 935
Tel: +64 9 269 1111
Email: sales@polyflor.co.nz

Norway
Polyflor Nordic
Tel: +47 23 00 84 00
Email: firmapost@polyflor.no

Spain
Polyflor Ltd.
Tel: +34 619 949 054
Email: info@polyflor.com

Sweden
Polyflor Nordic Sweden AB
Tel: +46 (0) 300 15820
Email: info@polyflor.se

POLYFLOR CANADA

3209 Orlando Dr, Mississauga Ontario
L4V 1C5, Canada

Tel: (905) 364-3000
E-mail: sales@polyflor.ca

www.polyflor.ca

*James Halstead*TM
FLOORING