



FOREST FX PUR

FOREST FX PUR

Forest FX represents the natural beauty and sophistication of wood in a practical and durable vinyl sheet format.

These on-trend authentic wood effects have been created by Polyflor's design team who incorporate intricate grain detail and natural tones into each floorcovering. Ideal for high traffic, heavy commercial environments in the education, healthcare, leisure, retail, housing and office sectors.

- Heterogeneous sheet available in 18 colours
- PUR no wax, no finish, low maintenance
- R10 slip resistance per standard DIN 51130





Forest fx PUR



Technical Specification

Product Format		
Gauge	ISO 24346 (EN 428)	2.0mm
Wear Layer	ISO 24340 (EN 429)	0.70mm
Total Weight	ISO 23997 (EN 430)	2660g/m ²
Finish	PUR	
Performance Requirements		
General Performance	ISO 10582 (EN 649)	Conforms
	ASTM F1303	Type I, Grade I, Class B Backing
Use Area	ISO 10874 (EN 685)	23, 34, 43
Slip Resistance	EN 13893	Class DS
	DIN 51130 /	R10
	DIN EN 16165 Ann. B	
	AS 4586	R10
	ASTM D2047	SCOF ≥0.5
Binder Content	ISO 10582	Type I
Abrasion Resistance	EN 649	Group T
Reaction to Fire	EN 13501-1	Class Bfl-S1
	ASTM E648	Class 1
	CAN/ULC S102.2	FSV < 300; SDV < 500
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ASTM F1914	<0.005"
	ASTM F970 (Modified)	<0.005" (750 psi)
	ISO 24343-1	≤0.10mm
Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
Dimensional Stability	ISO 23999 (EN 434)	≤0.40%
Flexibility	ISO 24344 (EN 435)	(Method A) Pass 20mm ø
	ASTM F137	0.25" Pass
Underfloor Heating	Suitable, max 27°C	
Light Fastness	ISO 105-B02 (Method 3)	≥6
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets

Sheet Size

Format	Size	Shades	Coverage per Roll
Sheet	2m x 20m (2.187 yds x 21.872 yds)	18	40m ² (47.834 yds)

Sustainability		
BRE Green Guide		A+ ENP 415
GreenTag	LCA Rate Gold Plus	GreenRate level A
Generic EN 15804 EPD	Available	
Recyclable	100%	
Recycled Content	10%	
REACH	Compliant	
Indoor Air Comfort Gold	Eurofins certified product	
FloorScore	Certified	
Finnish M1 Classification	Certified	
AgBB/ABG	Pass	
Responsible Sourcing	BES 6001	Excellent

Acoustic Performance		
Impact Sound Reduction	ISO 10140-3	8dB

Maintenance Performance		
Resistance to Chemicals	ISO 26987 (EN 423)	Good resistance
	ASTM F925	Good resistance

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

Hygiene		
Bacterial Resistance	ISO 846 Part C	Does not favour growth

Forest fx PUR



Parish Oak Parquet 3106
plank size in sheet: 76.2 x 288.6mm
w/r 9841 LRV 32



Blanched Oak 3113
plank size in sheet: 200 x 1000mm
w/r 3113 LRV 42



Oslo Oak 3104
plank size in sheet: 167 x 1500mm
w/r 9829 LRV 32



Newport Oak 3109
plank size in sheet: 167 x 1500mm
w/r 9838 LRV 30



Grey Sawmill Oak 3101
plank size in sheet: 180 x 1000mm
w/r 3101 LRV 40



Rock Salt Oak 3103
plank size in sheet: 220 x 1500mm
w/r 3103 LRV 37



Alloyed Timber 3105
plank size in sheet: 167 x 1500mm
w/r 9841 LRV 24



Oiled Oak 2990
plank size in sheet: 167 x 1500mm
w/r 2990 LRV 35



Rural Deckwood 3102
plank size in sheet: 180 x 1000mm
w/r 3102 LRV 28



Eton Oak Parquet 3108
plank size in sheet: 76.2 x 288.6mm
w/r 9822 LRV 24



Classic Oak 3100
plank size in sheet: 167 x 1500mm
w/r 3330 LRV 29



Rustic Oak 3330
plank size in sheet: 84 x 332/664mm
w/r 3330 LRV 29



American Oak 3380
plank size in sheet: 100 x 1000mm
w/r 3380 LRV 36



European Oak 3340
plank size in sheet: 100 x 1000mm
w/r 3340 LRV 21



French Walnut 3120
plank size in sheet: 167 x 1000mm
w/r 3120 LRV 17



Smoked Oak 3150
plank size in sheet: 167 x 1500mm
w/r 3150 LRV 14



Mahogany 3360
plank size in sheet: 84 x 332/664mm
w/r 3360 LRV 10




Brazilian Walnut 3990
plank size in sheet: 133 x 1000mm
w/r 3990 LRV 8



French Walnut 3120



Classic Oak 3100 | Smoked Oak 3150

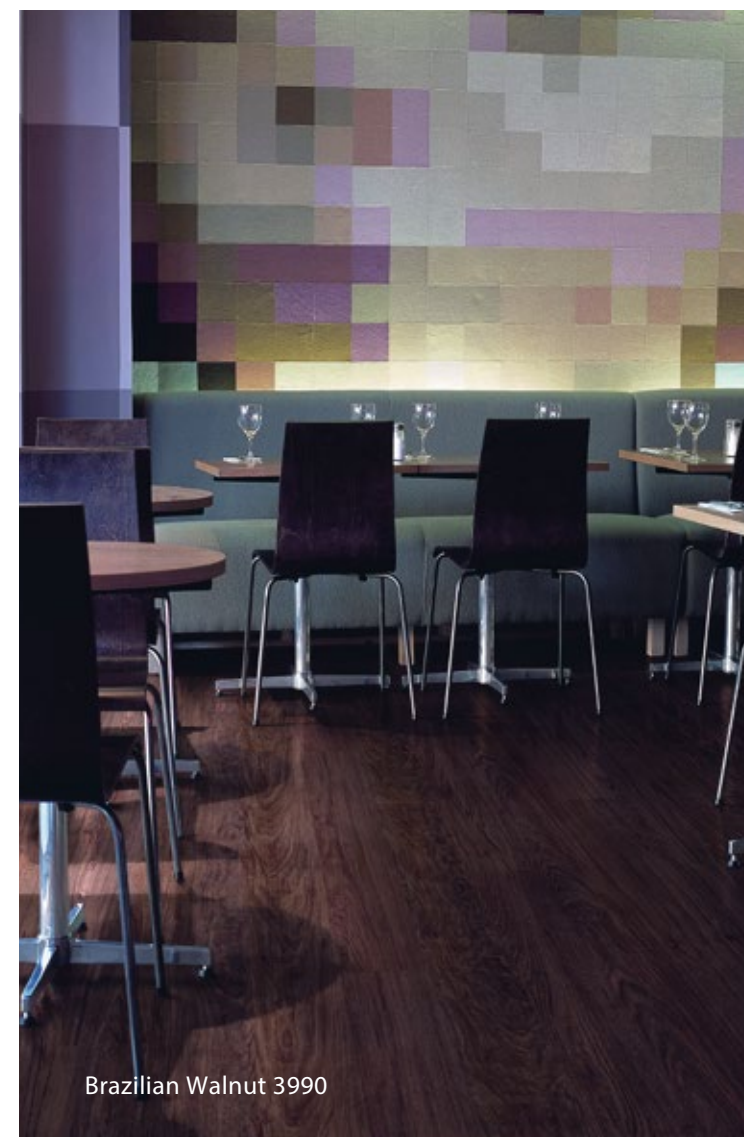

Brazilian Walnut 3990



Smoked Oak 3150 | Oiled Oak 2990

All you need to know

Our history

Founded in 1915, James Halstead plc, the parent company of Polyflor Ltd, was originally a textile company based in Manchester, UK, until the 1950's when it pioneered the development of homogeneous vinyl floorings.



Responsible sourcing

Polyflor is proud to be the first flooring manufacturer to be awarded BES 6001 certification for the Responsible Sourcing of Construction Product, achieving an Excellent rating. This is a recognised standard certified by BRE Global which proves that a manufacturer is using materials that have been responsibly sourced and acts responsibly.




Help is here

Polyflor has dedicated and experienced personnel within its sales, marketing, technical and design departments, to provide comprehensive support to our customers. We are ready to assist with queries on topics such as product selection, specification, installation, performance and ongoing maintenance.



Product innovation

In collaboration with industry partners, Polyflor is working on developments in new products and technologies. Recent launches include a non-directional homogeneous sheet collection that keeps waste to a minimum and loose lay adhesive-free safety sheet and high design tile and plank flooring for quick turnaround projects.

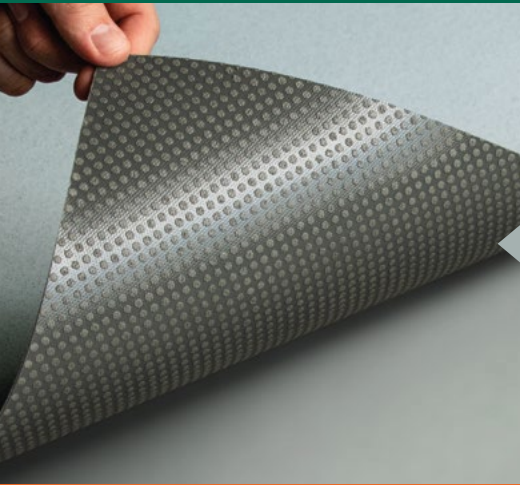


BES 6001

Responsible Sourcing

www.greenbooklive.com

Design service

Our designers can provide visuals and advise colours and product choices when you're looking to create a memorable floor design. We offer the precision and the flexibility of waterjet cutting to produce any design you require.

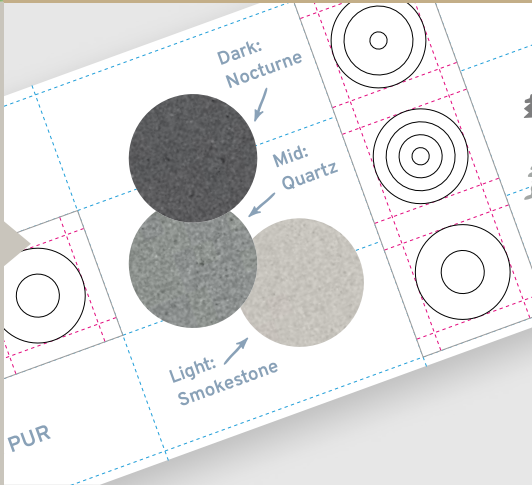

BIM objects

A selection of Polyflor's market leading product ranges are now available as Building Information Modelling (BIM) objects.

These objects can be downloaded free of charge from the NBS National BIM Library or www.polyflor.com/bim and www.bimobject.com

Commitment to our supply chain

With ISO 9001 Quality Management and ISO 14001 accreditation, the availability of consistent, good quality products is ensured. We test our products to a wide range of international standards, including slip resistance and VOC emissions, to back-up their performance.



Flooring when you need it

Thanks to Polyflor's extensive warehousing facilities and commitment to holding large quantities of stock, we can react quickly to orders and offer faster lead times for our customers. Polyflor products are readily available worldwide through our wide network of supporting agents and wholesale partners.



Training at Polyflor

To encourage best practice throughout the flooring sector, Polyflor offers both floor laying and floor cleaning courses in a purpose-built facility. For more info contact info@polyflor.ca



Recycling vinyl

Polyflor is a co-founding and funding member of Recofloor, the UK flooring industry's leading vinyl take back scheme for waste vinyl off-cuts and smooth uplifted flooring. For more information about the Recofloor recycling scheme visit www.recofloor.org



Low maintenance

Polyflor's PUR polyurethane reinforcement is cross linked and UV cured for enhanced protection, optimum appearance retention and superior cleaning benefits such as an easier more environmentally friendly maintenance regime. For further in-depth and tailored information on floor maintenance, visit www.polyflor.ca



Free samples

To request free individual product samples of any of Polyflor's flooring collections, visit www.polyflor.ca or email us at samples@polyflor.ca. Alternatively, you can call the dedicated Polyflor Sample Hotline on (905) 364-3000





Smoked Oak 3150 | Oiled Oak 2990



Smoked Oak 3150 | Oiled Oak 2990

POLYFLORTM INTERNATIONAL

Australia
Polyflor Australia
Tel: 1800 777 425
Email: sales@polyflor.com.au

Canada
Polyflor Canada Inc.
Tel: +1 905 364 3000
Email: sales@polyflor.ca

China
Polyflor Hong Kong O/B Polyflor Ltd.
Tel: +(852) 2865 0101
Email: info@polyflor.com.hk

Colombia
Polyflor Ltd. (LATAM Office)
Tel: +57 3223082375
Email: info@polyflor.com

France
James Halstead France SAS
Tel: +33 (0)8 20 20 32 11
Email: info@jhfrance.fr

Germany
objectflor Art und Design Belags GmbH
Tel: +49 (0) 2236 966 330
Email: info@objectflor.de

India
Polyflor India Pvt Ltd.
Tel: +91 22 4023 2485
Tel: +91 22 4023 2486
Email: info@polyflor.co.in

Ireland
Polyflor Ireland
Tel: +353 (1) 864 9304
Email: salesireland@polyflor.com

Malaysia
Polyflor Martex
Tel: 1300 80 7788
Email: sales@polyflor.com.my

Middle East
Polyflor FZE
Tel: +971 50 406 8114
E-mail: aelwakil@polyflorfze.ae

New Zealand
Polyflor New Zealand Ltd.
Tel: 0800 765 935
Tel: +64 9 269 1111
Email: sales@polyflor.co.nz

Norway
Polyflor Nordic
Tel: +47 23 00 84 00
Email: firmapost@polyflor.no

Spain
Polyflor Ltd.
Tel: +34 619 949 054
Email: info@polyflor.com

Sweden
Polyflor Nordic Sweden AB
Tel: +46 (0) 300 15820
Email: info@polyflor.se

POLYFLOR CANADA

3209 Orlando Dr, Mississauga Ontario
L4V 1C5, Canada

Tel: (905) 364-3000
E-mail: sales@polyflor.ca

www.polyflor.ca

*James Halstead*TM
FLOORING