

# Polysafe™



VERONA  
PURE COLOURS PUR

## VERONA PURE PUR COLOURS

Polysafe Verona PUR is a safety vinyl range combining the assurance of slip resistance with high durability for years of performance. The combination of pastel shades and deeper hues, with a specially engineered emboss and a matt finish, ensures a fresh new range with a distinctive style.

Additionally, the Pure Colours collection features enhanced sustainable slip resistance of 45+ (slider 96).

- Safety sheet flooring available in 18 colours
- PUR no wax, no finish, low maintenance
- R11 slip resistance per standard DIN 51130





## Polysafe Verona PUR: Pur Colours

UK  
CA  
BS EN 14041  
EN 14041

Polysafe Verona PUR: Pur Colours

### Technical Specification

Product Format		
Gauge	ISO 24346 (EN 428)	2.0mm
Total Weight	ISO 23997 (EN 430)	2600g/m <sup>2</sup>
Finish	PUR	
Performance Requirements		
EN 13845	Conforms	
General Performance	ASTM F1303	Type II, Grade I, Class B Backing
Use Area	ISO 10874 (EN 685)	23, 34, 43
EN 13845	ESf	
RRL Pendulum Test	≥45 (wet test - 45 Rubber / Slider 96)	
Enhanced Slip Resistance	DIN 51130 / DIN EN 16165 Ann. B	R11
Surface Roughness	Rz ≥20µm	
ASTM D2047	SCOF ≥0.8	
AS 4586 Appendix A	P4	
AS 4586 Appendix D	R11	
Abrasion Resistance	EN 13845	50,000 cycles
	EN 13501-1	Class Bfl-S1
Reaction to Fire	ASTM E648	Class 1
	Aus NCC Spec C1.10-3	Complies
	CAN/ULC S102.2	FSV < 300; SDV < 500
	AS ISO 9239-1	>8.0kW/m <sup>2</sup>
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ASTM F970 (Modified)	≤0.005" (750 psi)
Flexibility	ASTM F137	1.5" Pass
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets


### Sheet Size

Format	Size	Shades	Coverage per Roll
Sheet	2m x 20m (2.187 yds x 21.872 yds)	15	40m <sup>2</sup> (47.834 yds)

Sustainability				
BRE Green Guide	A+ ENP 472			
Generic EN 15804 EPD	Available			
Recyclable	100%			
Recycled Content	Contains recycled material			
REACH	Compliant			
Indoor Air Comfort Gold	Eurofins certified product			
FloorScore	Certified			
Finnish M1 Classification	Certified			
AgBB/ABG	Pass			
Responsible Sourcing	BES 6001	Excellent		
Maintenance Performance				
Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925	Good resistance Good resistance		
Alco Hand Gels	Compatible for use with most commonly used alco-based hand gels			
Steam Cleaning	Suitable for steam cleaning on a periodic basis			
All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.				
Hygiene				
Bacterial Resistance	ISO 846 Part C	Does not favour growth		



w/r - Weld Rod      LRV - Light Reflectance Value      NCS - Natural Colour System

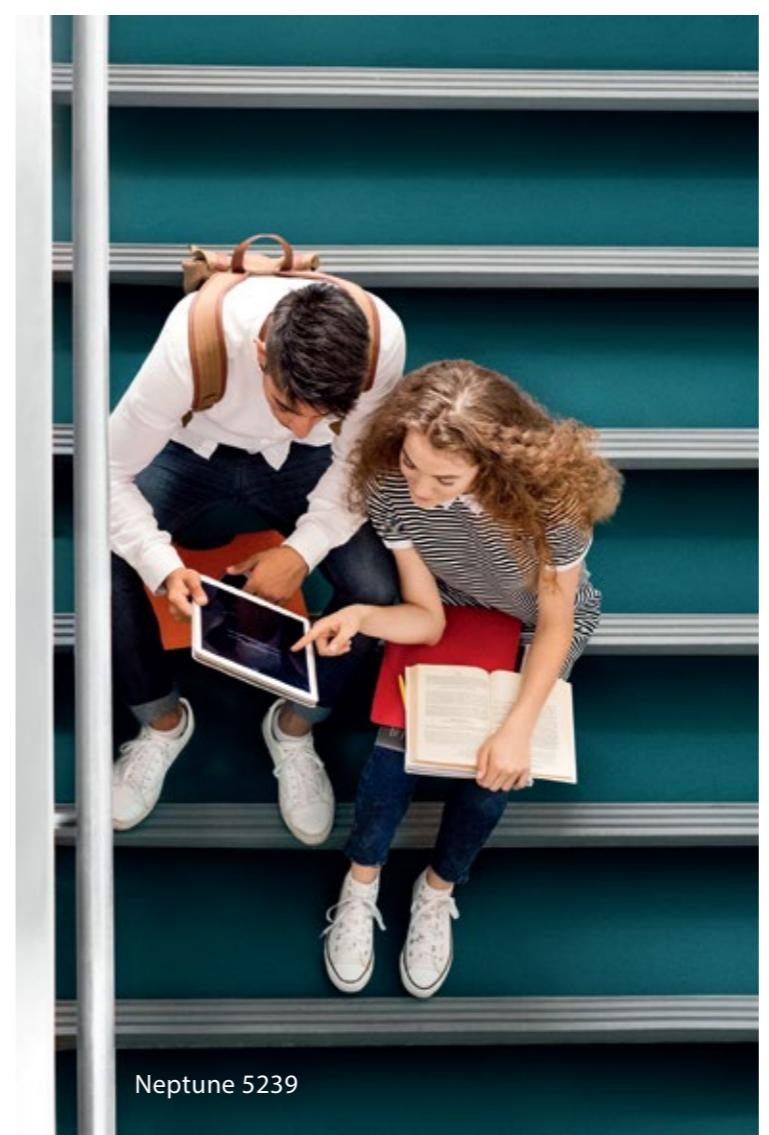

## Our history

Founded in 1915, James Halstead plc, the parent company of Polyflor Ltd, was originally a textile company based in Manchester, UK, until the 1950's when it pioneered the development of homogeneous vinyl floorings.



## Product innovation

In collaboration with industry partners, Polyflor is working on developments in new products and technologies. Recent launches include a non-directional homogeneous sheet collection that keeps waste to a minimum and loose lay adhesive-free safety sheet and high design tile and plank flooring for quick turnaround projects.




## Commitment to our supply chain

With ISO 9001 Quality Management and ISO 14001 accreditation, the availability of consistent, good quality products is ensured. We test our products to a wide range of international standards, including slip resistance and VOC emissions, to back-up their performance.



## Recycling vinyl

Polyflor is a co-founding and funding member of Recofloor, the UK flooring industry's leading vinyl take back scheme for waste vinyl off-cuts and smooth uplifted flooring. For more information about the Recofloor recycling scheme visit [www.recofloor.org](http://www.recofloor.org)

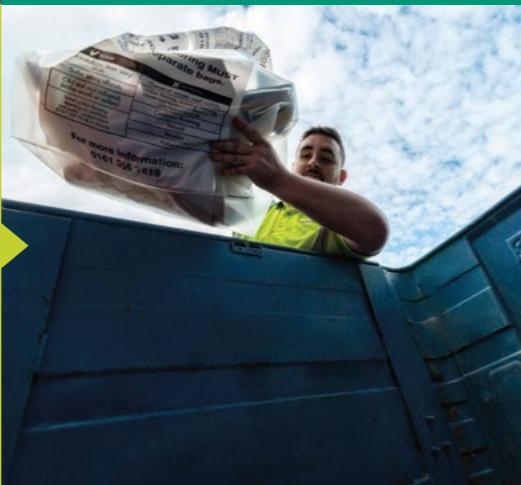

## Responsible sourcing

Polyflor is proud to be the first flooring manufacturer to be awarded BES 6001 certification for the Responsible Sourcing of Construction Product, achieving an Excellent rating. This is a recognised standard certified by BRE Global which proves that a manufacturer is using materials that have been responsibly sourced and acts responsibly.

**BES 6001**  
Responsible Sourcing  
[www.greenbooklive.com](http://www.greenbooklive.com)




## Design service

Our designers can provide visuals and advise colours and product choices when you're looking to create a memorable floor design. We offer the precision and the flexibility of waterjet cutting to produce any design you require.


**Help is here**

Polyflor has dedicated and experienced personnel within its sales, marketing, technical and design departments, to provide comprehensive support to our customers. We are ready to assist with queries on topics such as product selection, specification, installation, performance and ongoing maintenance.

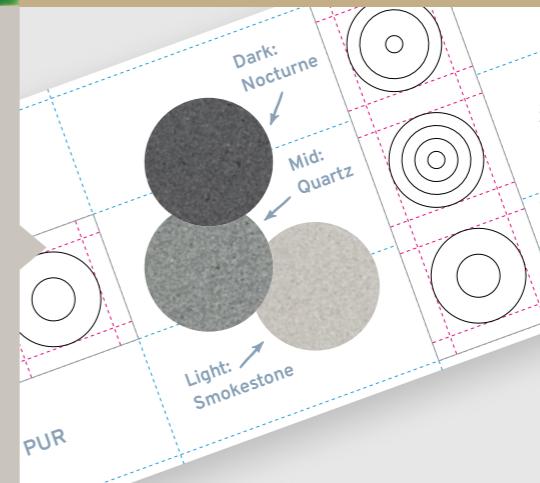

## Training at Polyflor

To encourage best practice throughout the flooring sector, Polyflor offers both floor laying and floor cleaning courses in a purpose-built facility. For more info contact [info@polyflor.ca](mailto:info@polyflor.ca)

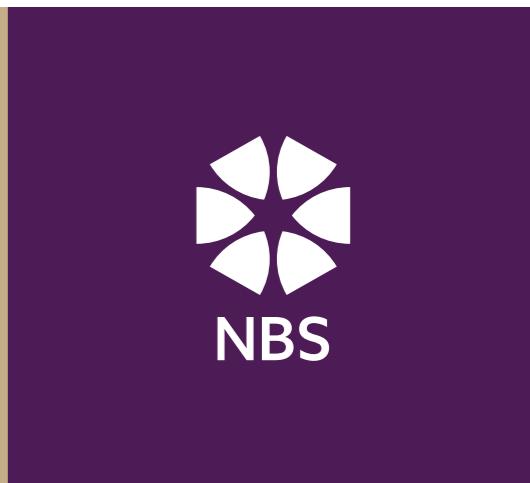

## BIM objects

A selection of Polyflor's market leading product ranges are now available as Building Information Modelling (BIM) objects. These objects can be downloaded free of charge from the NBS National BIM Library or [www.polyflor.com/bim](http://www.polyflor.com/bim) and [www.bimobject.com](http://www.bimobject.com)



## Free samples

To request free individual product samples of any of Polyflor's flooring collections, visit [www.polyflor.ca](http://www.polyflor.ca) or email us at [samples@polyflor.ca](mailto:samples@polyflor.ca). Alternatively, you can call the dedicated Polyflor Sample Hotline on **(905) 364-3000**



## Low maintenance

Polyflor's PUR polyurethane reinforcement is cross linked and UV cured for enhanced protection, optimum appearance retention and superior cleaning benefits such as an easier more environmentally friendly maintenance regime. For further in-depth and tailored information on floor maintenance, visit [www.polyflor.ca](http://www.polyflor.ca)



Vanilla 5221



Mocha 5222

POLYFLOR™ INTERNATIONAL

Australia  
Polyflor Australia  
Tel: 1800 777 425  
Email: sales@polyflor.com.au

Ireland  
Polyflor Ireland  
Tel: +353 (1) 864 9304  
Email: salesireland@polyflor.com

Canada  
Polyflor Canada Inc.  
Tel: +1 905 364 3000  
Email: sales@polyflor.ca

Malaysia  
Polyflor Martex  
Tel: 1300 80 7788  
Email: sales@polyflor.com.my

China  
Polyflor Hong Kong O/B Polyflor Ltd.  
Tel: +(852) 2865 0101  
Email: info@polyflor.com.hk

Middle East  
Polyflor FZE  
Tel: +971 50 406 8114  
E-mail: aelwakil@polyflorfze.ae

Colombia  
Polyflor Ltd. (LATAM Office)  
Tel: +57 3223082375  
Email: info@polyflor.com

New Zealand  
Polyflor New Zealand Ltd.  
Tel: 0800 765 935  
Tel: +64 9 269 1111  
Email: sales@polyflor.co.nz

France  
James Halstead France SAS  
Tel: +33 (0)8 20 20 32 11  
Email: info@jhfrance.fr

Norway  
Polyflor Nordic  
Tel: +47 23 00 84 00  
Email: firmapost@polyflor.no

Germany  
objectflor Art und Design Belags GmbH  
Tel: +49 (0) 2236 966 330  
Email: info@objectflor.de

Spain  
Polyflor Ltd.  
Tel: +34 619 949 054  
Email: info@polyflor.com

India  
Polyflor India Pvt Ltd.  
Tel: +91 22 4023 2485  
Tel: +91 22 4023 2486  
Email: info@polyflor.co.in

Sweden  
Polyflor Nordic Sweden AB  
Tel: +46 (0) 300 15820  
Email: info@polyflor.se

POLYFLOR CANADA INC.

3209 Orlando Dr, Mississauga Ontario  
L4V 1C5, Canada

Tel: (905) 364-3000  
E-mail: sales@polyflor.ca

[www.polyflor.ca](http://www.polyflor.ca)

*James Halstead™*  
FLOORING