


ELECTRO STATIC DISSIPATIVE (ESD)

MAINTENANCE REGIME



INITIAL CONSTRUCTION CLEAN




OR



- 1** Remove all loose debris.
> Ensure that all traces of adhesive are removed from the surface of the floor covering.
> Sweep or vacuum to remove dust and grit.



- 2** Damp mop with a neutral detergent.
> Diluted to the manufacturer's instructions.



165-300 RPM




- 1** For heavy soiling:
Apply a solution of diluted alkaline cleanser and leave for a sufficient time to react with the soiling.
> Use a 165 to 300 rpm rotary machine to scrub



- 2** Rinse the floor thoroughly with clean warm water
> Pick up with a wet vacuum and leave to dry thoroughly.

Normal, commercially available polishes should not be applied to Polyflor ESD products, as they will inhibit the conductive properties. Polishes described as 'antistatic' are classified by a different standard from that of the floor covering, and should be treated as a standard polish in static control terms. Consequently, they should not be applied.

Conductive polishes, which are approved by Polyflor can be applied in strict accordance with the manufacturer's instructions. Prior to application of a floor dressing, ensure that the floor is thoroughly scrubbed. This will ensure that there is a good key between the dressing and the surface of the flooring.



FLOOR POLISH APPLICATION



OR




OR




- 1** Mop, sweep or vacuum to remove dust and loose dirt.
> If required, spot remover to remove stubborn marks, with a neutral cleanser.



- 2** Rinse thoroughly and allow to dry
> Dry buff to restore finish.



- 3** Using an alkaline or germicidal cleanser, diluted to the manufacturer's instructions, spray a fine mist onto the floor.
Using a 165 to 1000 rpm rotary machine and a suitable spray cleaning pad, buff the floor.

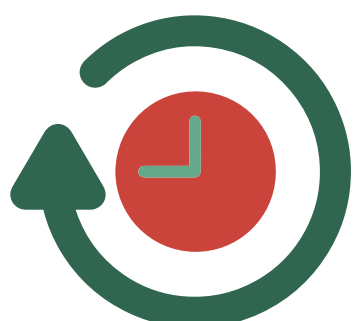

ROUTINE MAINTENANCE



ADDITIONAL INFORMATION

POLYFLOR
COVERING THE WORLD

- > Always follow the Health and Safety guidance provided.
- > Always ensure mops and pads are kept specifically for the static control areas, to prevent a possible transfer of polish.
- > Regular cleaning is more beneficial to the floor covering and more cost-effective than occasional heavy cleaning.
- > Before applying conductive polish, always discuss with Polyflor CTSD.

If in doubt, please contact Polyflor Canada.

For more detailed information visit, www.polyflor.ca or e-mail tech@polyflor.ca with any maintenance questions.

Polyflor Canada Inc.
Tel: +1 905 364 3000
Email: sales@polyflor.ca