


STANDARD SMOOTH VINYL WITH PUR

MAINTENANCE REGIME




INITIAL CONSTRUCTION CLEAN

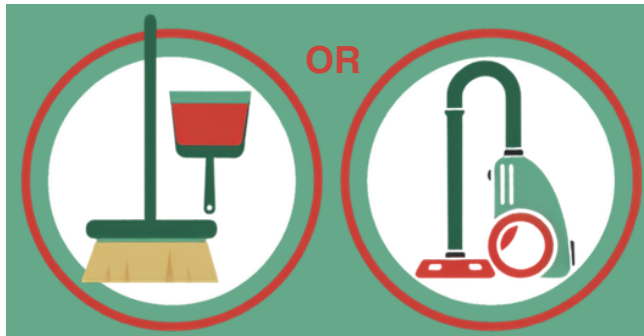


- 1 Remove all loose debris.
> Ensure that all traces of adhesive are removed from the surface of the floor covering. > Sweep or vacuum to remove dust and grit.



- 2 Damp mop with a neutral detergent.
> If required, dry buff with a 1000 rpm plus rotary machine fitted with a 3M red or white pad.

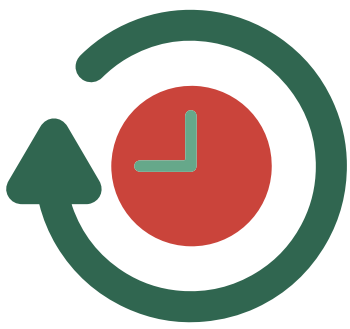

ROUTINE MAINTENANCE

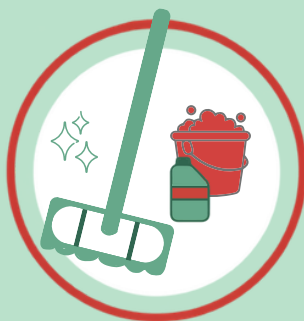

- 1 Damp mop with a neutral detergent.




1000 RPM

- 2 > If required, dry buff with a 1000 rpm plus rotary machine fitted with a 3M red or white pad.




DAILY MAINTENANCE

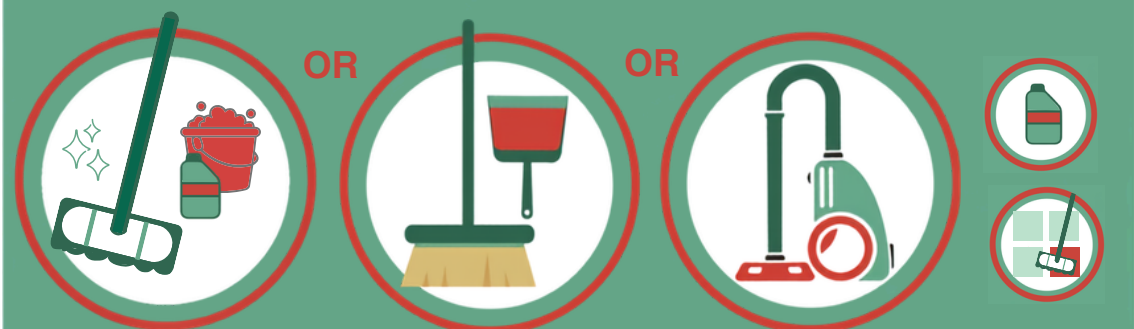

- 1 Mop, sweep or vacuum to remove dust and loose dirt.
> If required, spot mop to remove stubborn marks with a neutral cleanser.



WEEKLY MAINTENANCE

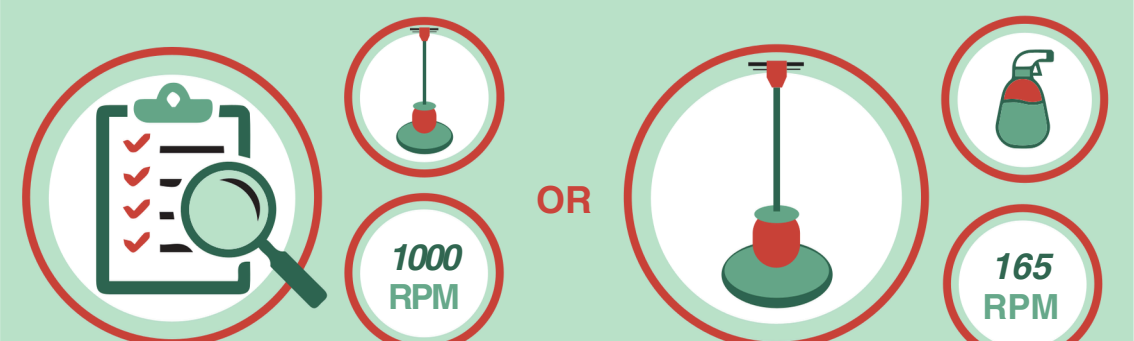

- 1 Assess the appearance of the floor.
> If required, light scuffing - dry buff with a 1000 rpm plus rotary machine fitted with a 3M red or green pad.
> If required, heavier scuffing — spray clean using a floor maintainer and 165 rpm plus rotary machine fitted with a 3M red or white pad.



PERIODIC MAINTENANCE



- 1 Assess the appearance of the floor.
> If the floor has dirt buildup, machine scrub with a scrubber dryer (approx. 165 rpm) fitted with a 3M red or white pad, using a neutral or alkaline detergent.



- 2 Rinse thoroughly and allow to dry.
> Dry buff to restore finish.



ADDITIONAL INFORMATION

> Always follow the Health and Safety guidance provided
> The maintenance regime requires the installation of an effective barrier matting system.
> Twister pads or any type of abrasive pad containing diamond shreds should only be used on smooth floors as part of a deep set cleaning and never for daily or frequent cleaning purposes.

If in doubt please contact Polyflor Canada.

For more detailed information visit, www.polyflor.ca or e-mail tech@polyflor.ca with any maintenance questions.

POLYFLOR™
COVERING THE WORLD

Polyflor Canada Inc.
Tel: +1 905 364 3000
Email: sales@polyflor.ca