

The image shows a spacious, modern interior, likely a lobby or waiting area. On the left, there is a curved white reception desk. The floor is covered in light-colored wood-look tiles. In the center, there are several long, low wooden benches and some potted plants. The right side of the image is dominated by a large glass wall that looks out onto a lush green landscape with trees. The ceiling is white with recessed lighting. In the background, there is a small seating area with chairs and a table.

EXPONA®

COMMERCIAL PUR

LUXURY VINYL TILES

SAME OR NEXT DAY PICK UP OR
DELIVERY FROM PCW, RICHMOND B.C





COMMERCIAL PUR

SAME OR NEXT DAY PICK UP OR
DELIVERY FROM PCW, RICHMOND B.C

WOOD

Grey Ash 4020	Dark Classic Oak 4088
Dark Brushed Oak 4030	Oiled Oak 4098
Natural Brushed Oak 4031	Cottage Oak Prisma 4117
Light Elm 4034	Vineyard Oak Prisma 4118
White Oak 4037	Oiled Oak Versailles 4129
French Vanilla Oak 4058	Wilder Oak 4133
Blond Limed Oak 4081	Everest Oak 4134
Grey Limed Oak 4082	Vineyard Oak 4136
Light Classic Oak 4085	

STONE

Warm Grey Concrete 5064
Light Grey Concrete 5067
Cool Grey Concrete 5068
Dark Grey Concrete 5069
Light Micro Terrazzo 5123
Grey Micro Terrazzo 5124
Grey Terrazzo 5128

STOCK AVAILABILITY CAN BE SUBJECT TO CHANGE



SAME OR NEXT DAY PICK UP OR
DELIVERY FROM PCW, RICHMOND B.C

WOOD

*Stock availability can be subject to change

609.6mm x 609.6mm
24" x 24"



Cottage Oak Prisma 4117
LRV 22



Vineyard Oak Prisma 4118
LRV 30



Oiled Oak Versailles 4129
LRV 28



Grey Ash 4020 LRV 28



Dark Brushed Oak 4030 LRV 10




Natural Brushed Oak 4031 LRV 26



Light Elm 4034 LRV 25



White Oak 4037 LRV 49



French Vanilla Oak 4058 LRV 38




Blond Limed Oak 4081 LRV 34



Grey Limed Oak 4082 LRV 25



Light Classic Oak 4085 LRV 33



Dark Classic Oak 4088 LRV 16



Oiled Oak 4098 LRV 28



Wilder Oak 4133 LRV 39



Everest Oak 4134 LRV 47



Vineyard Oak 4136 LRV 30

Expona Commercial PUR



Technical Specification

Product Format		
Gauge	ISO 24346 (EN 428)	2.5mm
Wear Layer	ISO 24340 (EN 429)	0.55mm
Total Weight	ISO 23997 (EN 430)	4290g/m²
Finish	PUR	
Performance Requirements		
General Performance	ISO 10582 (EN 649) ASTM F1700	Conforms Class III Type A+B
Use Area	ISO 10874 (EN 685)	23, 33, 42
Slip Resistance	EN 13893	Class DS
	DIN 51130 /	R10
	DIN EN 16165 Ann. B	
	ASTM D2047	≥0.5
	AS 4586	R10
Binder Content	ISO 10582	Type I
Abrasion Resistance	EN 649	Group T
Reaction to Fire	EN 13501-1	Class Bfl-S1
	ASTM E662	<450 Pass
	ASTM E648	Class 1
	CAN/ULC S102.2	FSV < 300; SDV < 500
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ISO 24343-1	≤0.05mm*
	ASTM F970	≤0.005" @ 750psi
	ASTM F1914	≤0.005"
Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
Dimensional Stability	ISO 23999 (EN 434)	≤0.10%
	ASTM F2199	Pass

*Average test value from current production.

Plank & Tile Sizes

Format	Size	Quantity per Box	Coverage per Box
Plank	152.4mm x 914.4mm(6" x 36")	24	3.34m² = 35.951 ft²
	152.4mm x 1219.2mm (6" x 48")	18	3.34m² = 35.951 ft²
	184.2mm x 1219.2mm (7.244" x 48")	15	3.37m² = 36.274 ft²
	184.2mm x 1524mm (7.244" x 60")	12	3.37m² = 36.274 ft²
	203.2mm x 1219.2mm (8" x 48")	14	3.46m² = 37.243 ft²
	203.2mm x 1524mm (8" x 60")	11	3.41m² = 36.704 ft²
	609.6mm x 609.6mm (24" x 24")	9	3.34m² = 35.951 ft²

Performance Requirements (Continued)		
Flexibility	ASTM F137	1" - Pass
Underfloor Heating	Suitable, max 27°C	
Light Fastness	ISO 105-B02 (Method 3)	≥6
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets

Sustainability		
BRE Green Guide		A+ ENP 429
GreenTag	LCA Rate Gold Plus	GreenRate level A
Specific EN 15804 EPD	Available	
Recyclable	100%	
Recycled Content	Up to 40%	
REACH	Compliant	
Indoor Air Comfort Gold	Eurofins certified product	
FloorScore	Certified	
Finnish M1 Classification	Certified	
AgBB/ABG	Pass	
Responsible Sourcing	BES 6001	Very Good
	SA 8000	Approved factory

Acoustic Performance		
Impact Sound Reduction	ISO 10140-3	2dB
Sound Transmission Coefficient	ASTM E90/492	STC 55
Impact Insulation Class	ASTM E90/492	IIC 36

Maintenance Performance		
Resistance to Chemicals	ISO 26987 (EN 423)	Good resistance
	ASTM F925	Good resistance
Regular light maintenance is more cost-effective than periodic heavy maintenance and more beneficial to the floor covering.		

Format	Size	Quantity per Box	Coverage per Box
Tile	304.8mm x 914.4mm (12" x 36")	12	3.34m² = 35.951 ft²
	457.2mm x 914.4mm (18" x 36")	8	3.34m² = 35.951 ft²
	609.6mm x 609.6mm (24" x 24")	9	3.34m² = 35.951 ft²
	609.6mm x 1219.2mm (24" x 48")	8	5.95m² = 64.045 ft²
	203.2mm x 1524mm (8" x 60")	11	3.41m² = 36.704 ft²

SAME OR NEXT DAY PICK UP OR
DELIVERY FROM PCW, RICHMOND B.C

STONE

*Stock availability can be subject to change

609.6mm x 609.6mm
24" x 24"



Warm Grey Concrete 5064 LRV 22



Light Grey Concrete 5067 LRV 34



Cool Grey Concrete 5068 LRV 23




Dark Grey Concrete 5069 LRV 14

609.6mm x 1219.2mm
24" x 48"



Light Micro Terrazzo 5123  LRV 31

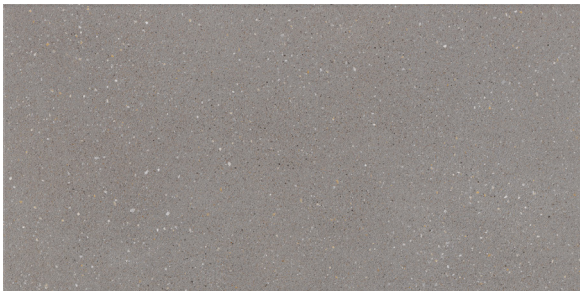

Grey Micro Terrazzo 5124  LRV 26



Grey Terrazzo 5128  LRV 33



Natural Brushed Oak 4031

*Pack includes both left and right patterns

LRV - Light Reflectance Value

 Bevelled Edges

 Colour/Pattern Variation

 Oversized Tiles



Dark Grey Concrete 5069



Cottage Oak Prisma 4117 / Grey Terrazzo 5128

EXPONA®

COMMERCIAL PUR

SAME OR NEXT DAY PICK UP OR
DELIVERY FROM PCW, RICHMOND B.C

POLYFLOR CANADA INC.

Ontario:
3209 Orlando Dr, Mississauga, Ontario
L4V 1C5, Canada

British Columbia:
2351 No. 6 Rd #130, Richmond, British Columbia
V6V 1P3, Canada

Tel: +1 905 364 3000
E-mail: sales@polyflor.ca

www.polyflor.ca

James Halstead™
FLOORING